


SIDE MOULDERS

Both Cylinders have a horizontal movement, to line to cut, without disturbing the vertical adjustment of the heads.

The plate under top Cylinder is slotted so that cutters can be used to swing below the bed line, to any depth of cut.

Chip Breakers for top and bottom Cylinders are adjustable, to permit the taking of a heavy cut.

All adjustments are quickly and easily made.

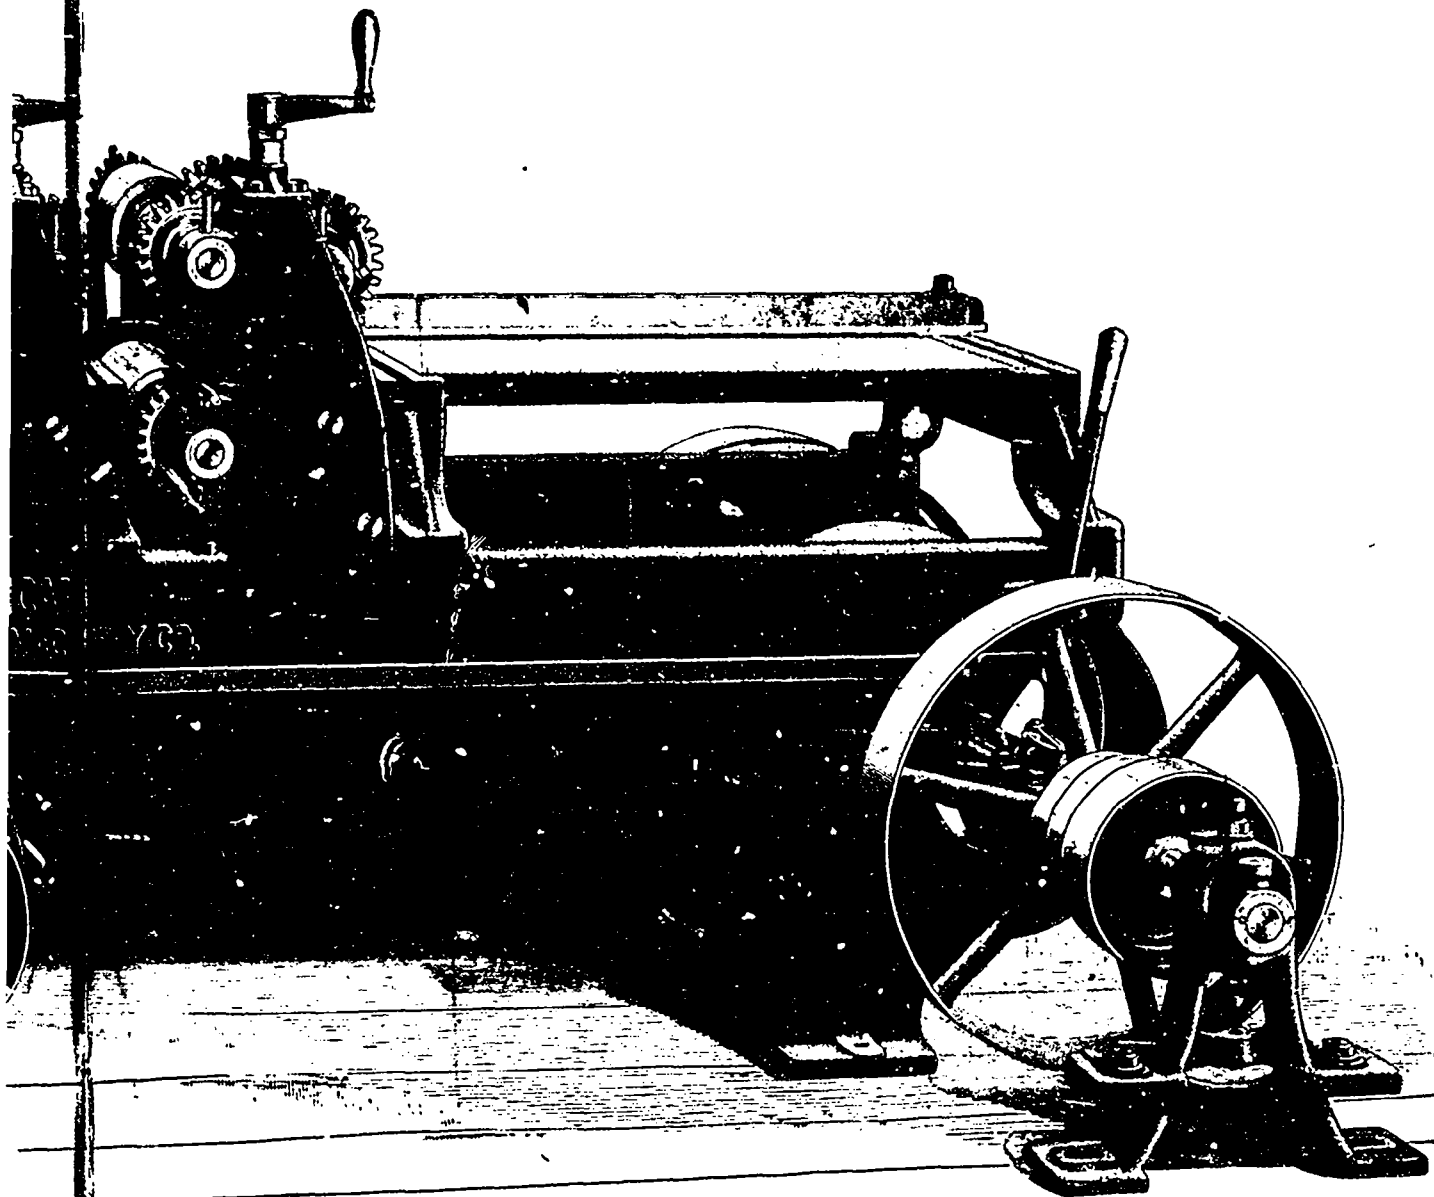

es thin; also 10 inches and 8 inches wide by 4 inches thick.

on, Price and Catalogue Address

Working Machinery Co.

NEW YORK, 136 Liberty Street

