




CANADA

DEPARTMENT OF  
MINES AND TECHNICAL SURVEYS  
SURVEYS AND MAPPING BRANCH

REFERENCE

Horizontal Control Point	△
Boundary Mon.	□
Spot Elevation, (in feet)	782
Building	•
Mill or Factory, small, Sawmill, etc.	• SM
Tank; Gas, Oil or Water	• OIL
Church; Cemetery	• C
School; Post Office	• S • P
Mine or Open Cut	• X
Quarry	• Q
Sand Dunes	•
Lake, intermittent or Pond	•
Lake or Shoreline, indefinite	•
Stream, intermittent or dry	•
Stream, indefinite	•
Marsh or Swamp	•
Inundated Land	•
Falls; Rapids	•
Foreshore Flats	•
Bluff, Cliff or Escarpment	•
Wharf or Pier	•
Reef, Rock or Small Island	•
Contours:	•
elevation	•
depression	•
approximate	•
Forest	• This map area is sparsely wooded.

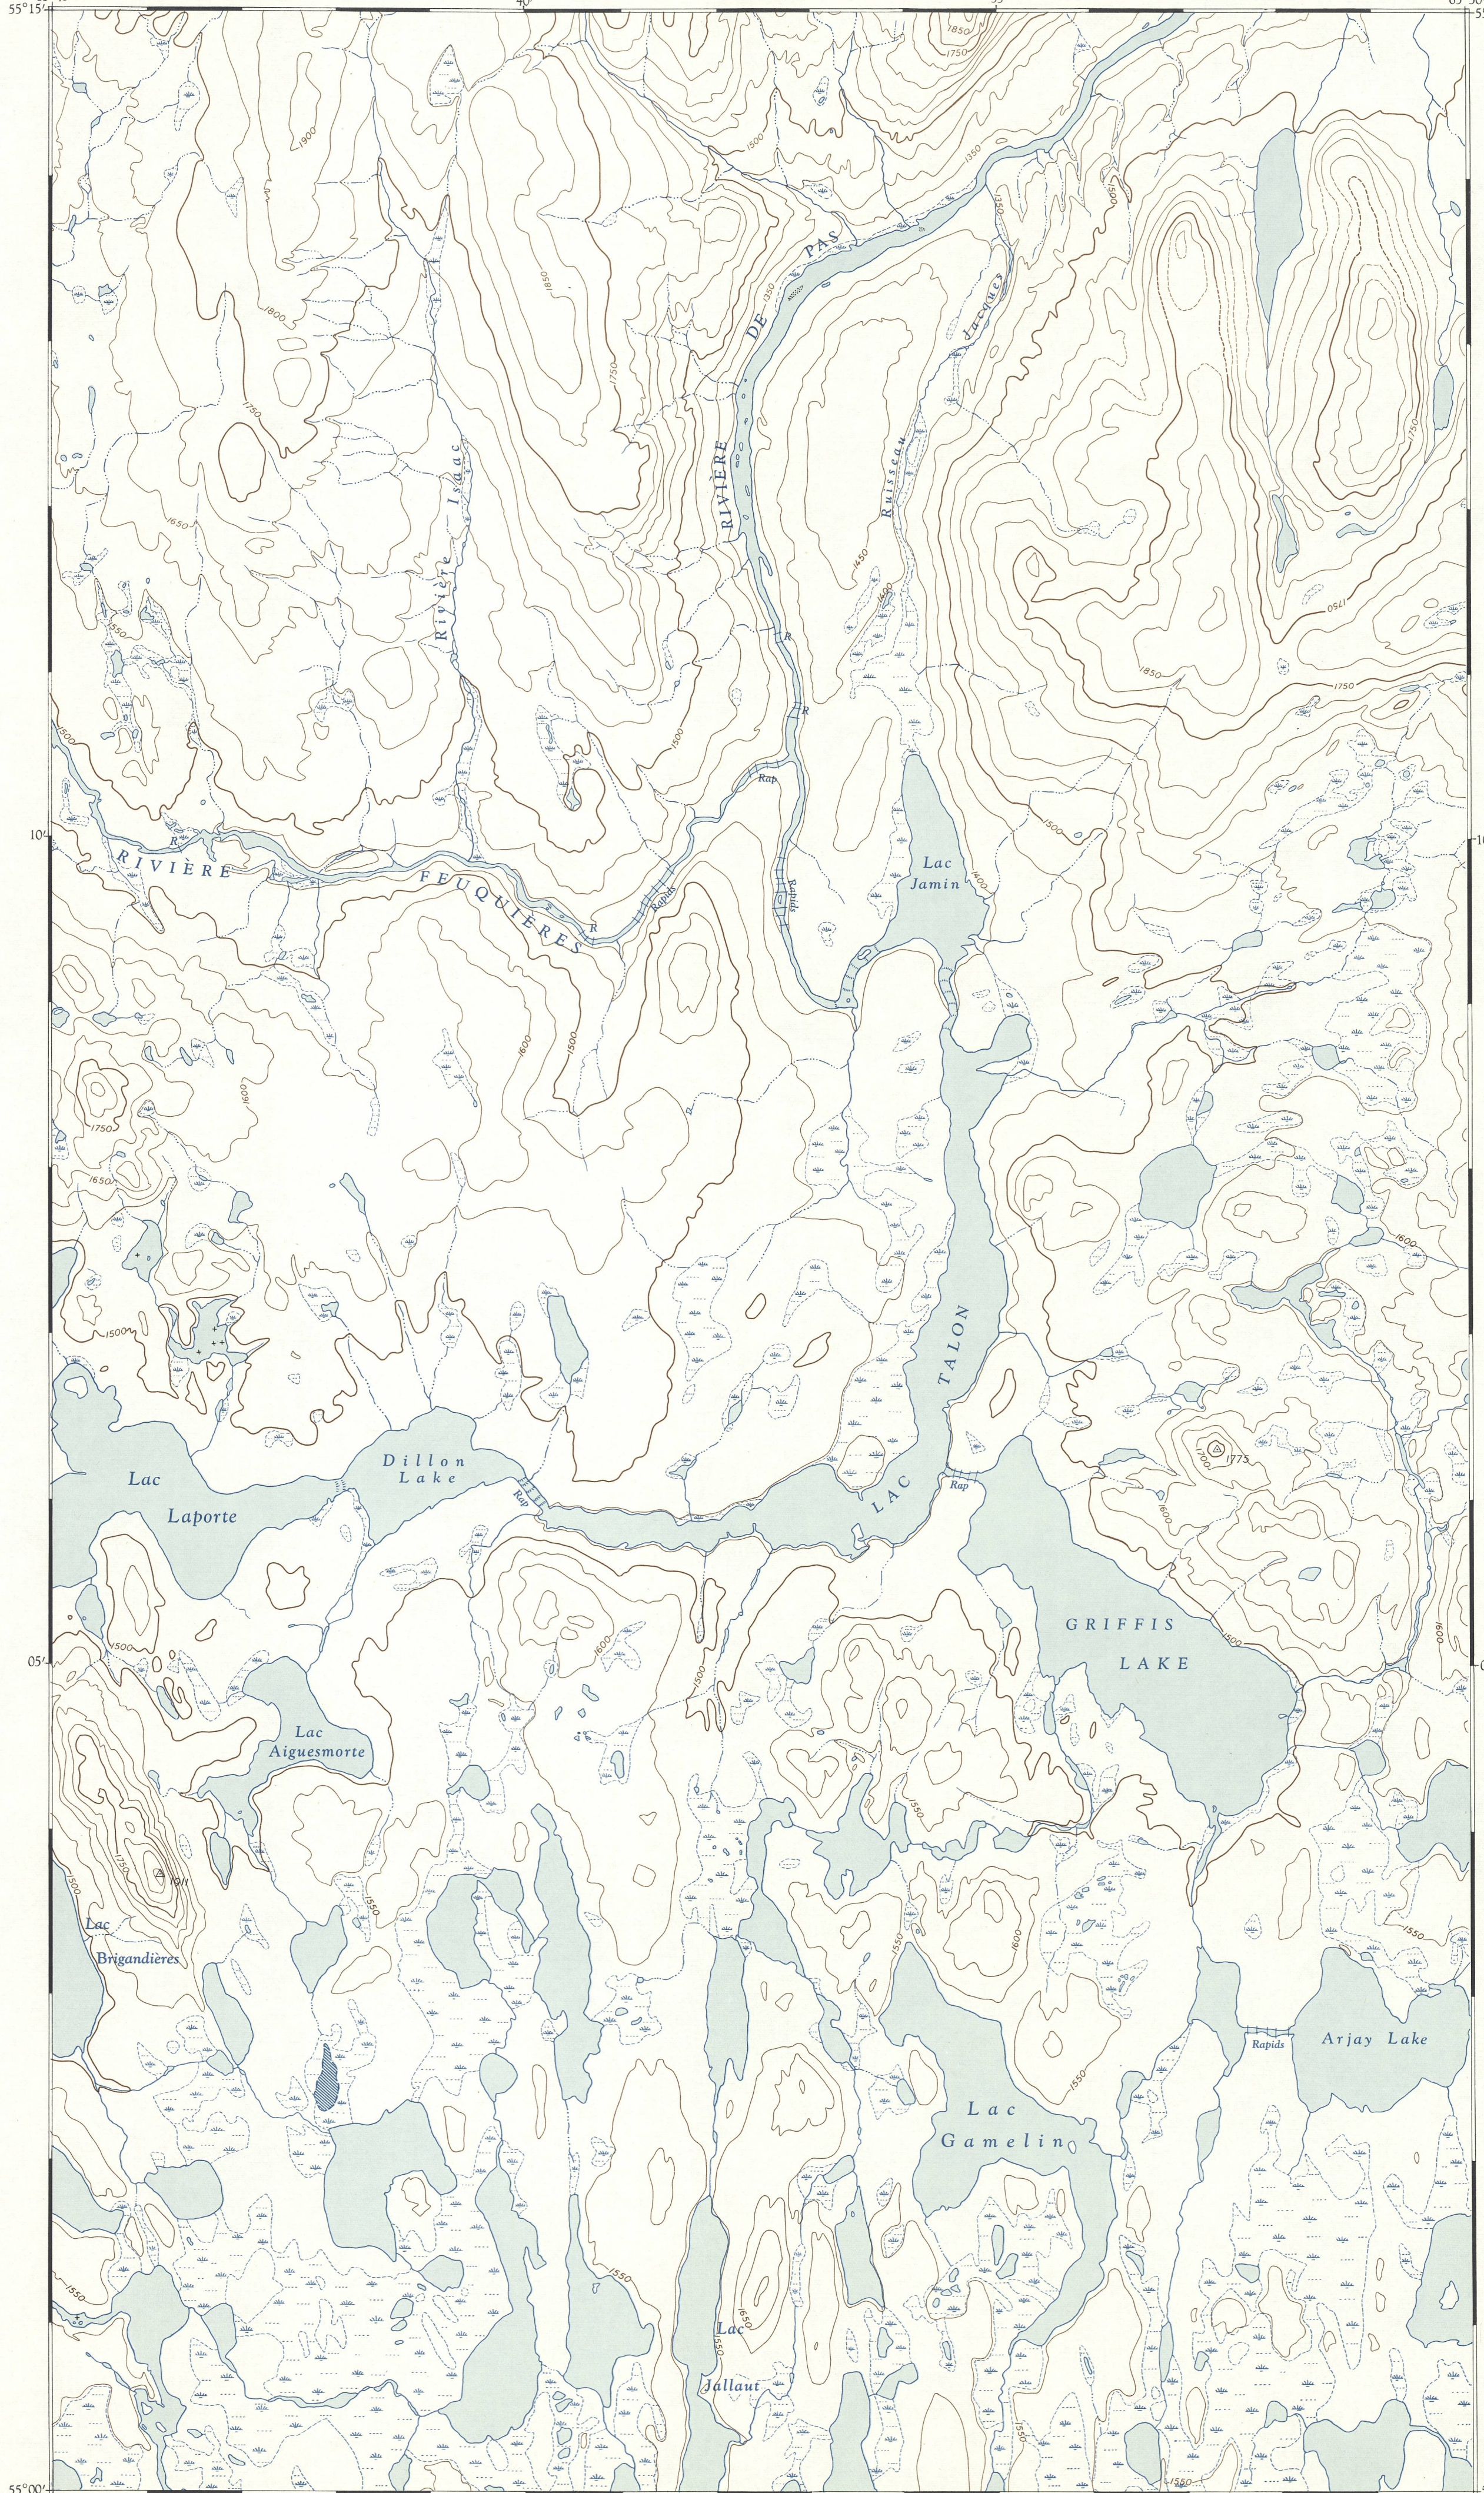


66°30'	23 O/8	23 P/5	65°00'
55°30'	THOMPSON LAKE	DEBORAH LAKE	23 P/6 55°30'
	23 O/1	23 P/4	23 P/3
	WILLBOB LAKE	GRIFFIS LAKE	
	23 J/16	23 I/13	23 I/14
54°45'	HOLLINGER LAKE	MARION LAKE	65°00' 54°45'
66°30'	INDEX TO ADJOINING SHEETS		

MAGNETIC DECLINATION 32°37' WEST,  
AT CENTRE OF SHEET 1953.  
Annual magnetic change 4' easterly.

GRIFFIS LAKE  
QUEBEC

23 P<sub>4</sub> EAST HALF  
FIRST EDITION

Produced by the Surveys and Mapping Branch,  
Department of Mines and Technical Surveys, 1952,  
from air photographs taken in 1948.  
Printed by the Army Survey Establishment, R.C.E.,  
Department of National Defence, 1954.  
Copies may be obtained from the Map Distribution  
Office, Department of Mines and Technical Surveys,  
Ottawa, at 25 cents per copy.

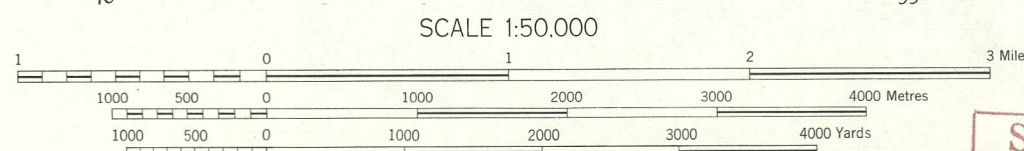

CONTOUR INTERVAL 50 FEET  
Elevations, in feet, based on Geodetic Vertical Angulation referred to sea level.

SUPERSEDED  
EDITION