


DEFECTS OF MOUNTING WHEELS ON AXLES.

- j. Loose wheel.
- k. Out of gauge, or wheels that measure less than 4 feet 5 inches or more than 4 feet 5½ inches between flanges, or less than 5 feet 4 inches over treads.

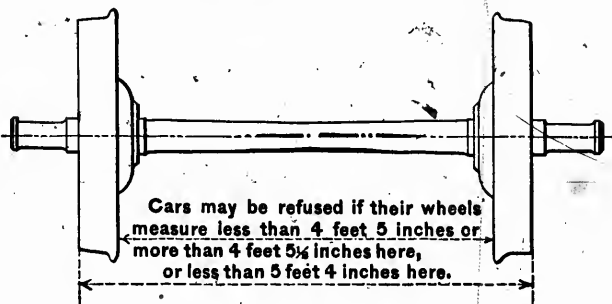

OTHER DEFECTS.

- l. Brakes in bad order.
- m. Brake wheels, steps, ladders or running boards in bad order, or insecurely fastened.
- n. Drawbars or attachments in bad order.
- o. Draft sills or draft timbers spliced.
- p. Intermediate or outside sills recently spliced in a manner not prescribed by the Rules.
- q. Leaky roofs on merchandise or grain cars.
- r. Doors which are not sufficient protection against fire or storms.
- s. Special or general defects of bodies or trucks, which render cars unsafe to run.

RULE 4—A car with defects which do not render it unsafe to run must be accepted, but in such cases the Company to whom such car is offered may require that a defect card shall be securely attached to the car, preferably on the inside of cross-tie timber.

Defect
cards, use
of.