

- c. Figure 11.1 shows a region MITNET node with trunking to another region and headquarters. Each of the mission MITNET nodes have a 19.2 Kbit/s circuit backhauled to the region MITNET node providing the FRS.

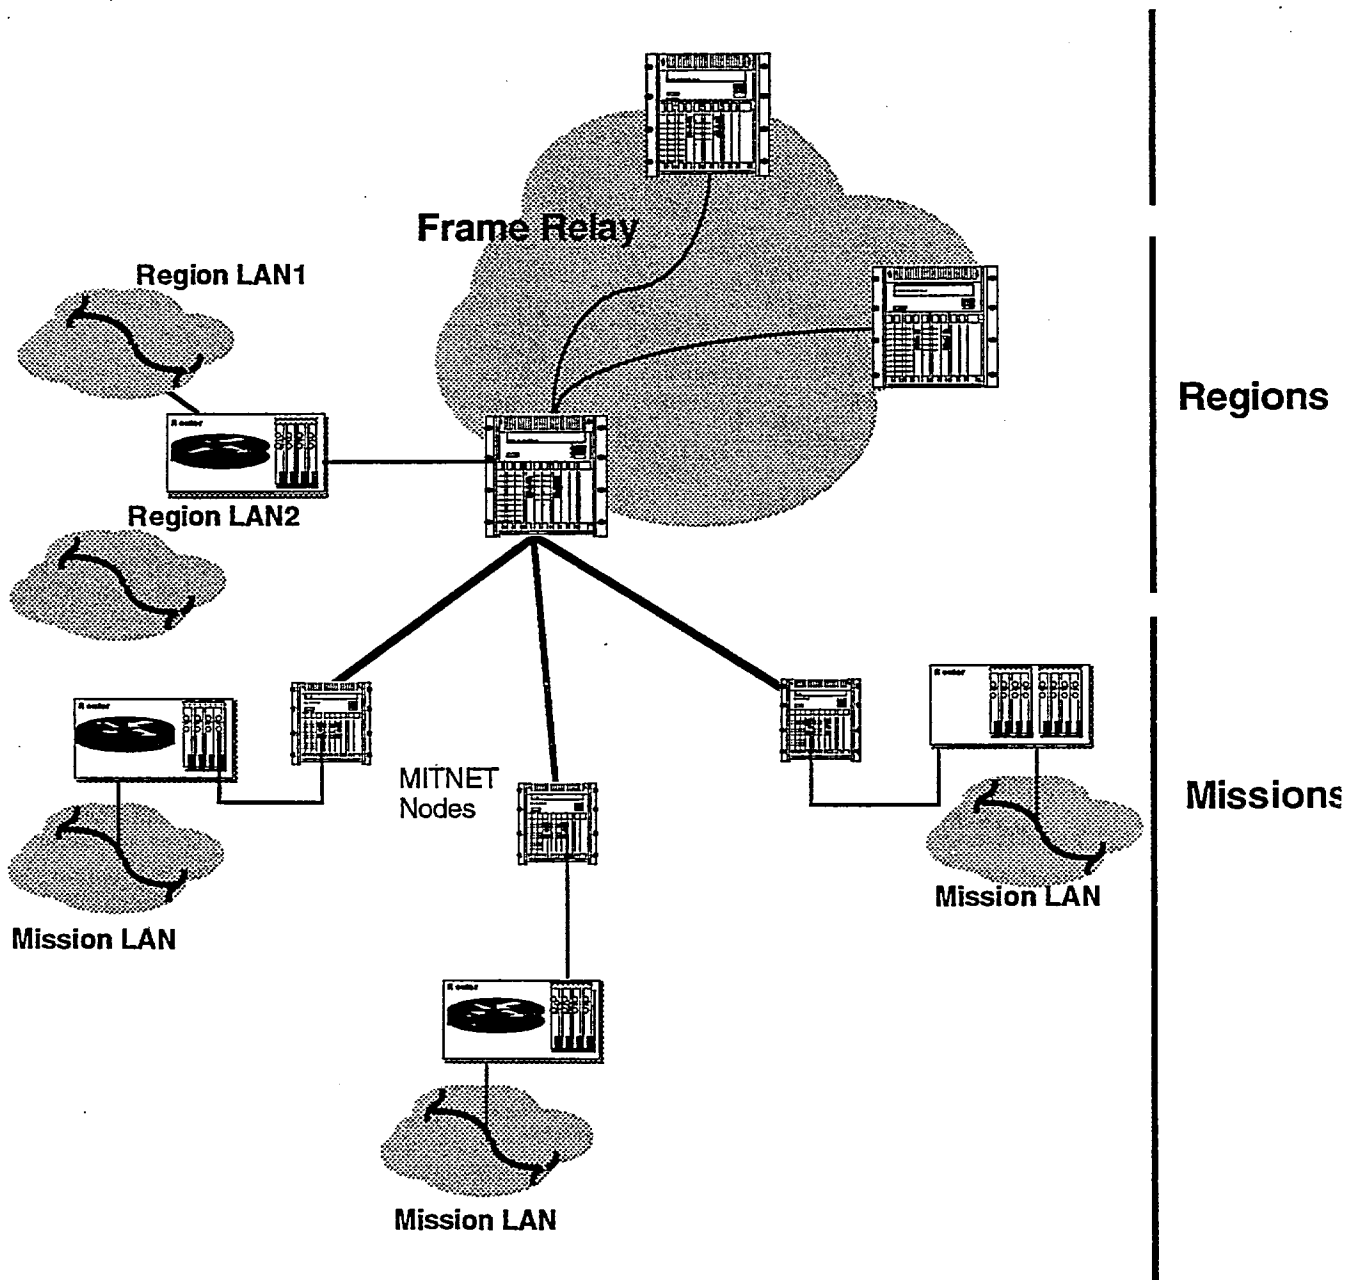


Figure 11.1: Frame Relay Service/MITNET Nodes