



CANADA  
DEPARTMENT OF  
MINES AND TECHNICAL SURVEYS  
SURVEYS AND MAPPING BRANCH

REFERENCE

Horizontal Control Point	△
Boundary Mon.	□
Spot Elevation, (in feet)	782
Building	■
Mill or Factory, small; Sawmill, etc.	SM
Tank; Gas, Oil or Water	■
Church; Cemetery	☐
School; Post Office	■ S ■ P
Mine or Open Cut	✕
Quarry	■
Sand Dunes	■
Lake, intermittent or Pond	■
Lake or Shoreline, indefinite	■
Stream, intermittent or dry	■
Stream, indefinite	■
Marsh or Swamp	■
Inundated Land	■
Falls; Rapids	■
Foreshore Flats	■
Bluff, Cliff or Escarpment	■
Wharf or Pier	■
Reef; Rock or Small Island	■
Contours:	■
elevation	■
depression	■
approximate	■

Wooded Area. Consists on this map of low scrub, with patches of larger growth.




55°15'	23 0/1	23 P/4	65°00'
WILLBOB LAKE		GRUFFIS LAKE	23 P/3 55°15'
23 2/16		23 1/13	23 1/14
HOLLINGER LAKE		MARION LAKE	
23 2/8		23 1/12	23 1/11
CAVERS LAKE		ANDRE LAKE	
54°30'	66°30'	65°00'	54°30'

INDEX TO ADJOINING SHEETS

MAGNETIC DECLINATION 32°48' WEST,  
AT CENTRE OF SHEET 1954.  
Annual magnetic change 4' easterly.

MARION LAKE  
QUEBEC AND  
NEWFOUNDLAND  
23 1/3 WEST HALF  
FIRST EDITION

Surveys by the Topographical Survey in 1949 and 1950. Compiled by the Topographical Survey in 1952, from air photographs taken in 1948.  
The "Quebec-Newfoundland" Boundary has not been established at date of publication.  
Lithographed and printed by the Army Survey Est., R.C.E., Department of National Defence, 1954.  
The general public may obtain copies of this map from the Map Distribution Office, Dept. of Mines and Technical Surveys, Ottawa, at 25 cents per copy.

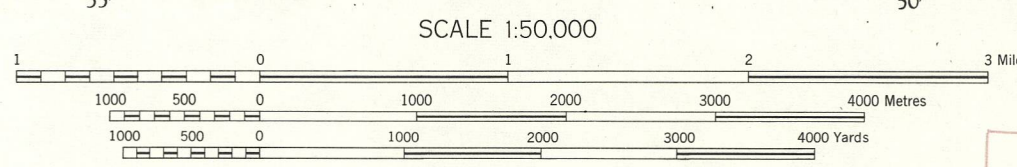

CONTOUR INTERVAL 50 FEET  
Elevations, in feet, based on Geodetic Vertical Angulation referred to sea level

SUPERSEDED  
EDITION