




CANADA
DEPARTMENT OF
MINES AND TECHNICAL SURVEYS
SURVEYS AND MAPPING BRANCH

REFERENCE

Roads:	5 or more lanes, Part completed
hard surface, heavy duty	2 lanes
hard surface, heavy duty	2 lanes
hard surface, medium duty	2 lanes
loose surface, graded and drained	14 ft wide
Other Roads:	Four credits
Trail or Portage	
Railways:	Station
double track	Stop
single track	Siding
abandoned	
narrow gauge or electric	
cutting, embankment	
Bridges:	
road, railway	
overpass, underpass	
Boundaries:	
International	
Province or State	
County or District	
Township or Parish	
Reservation, Park, etc.	
Surveyed Line	on Steel Towers on Wood Poles
Electric Power Line	trunk route
Telephone Line	trunk route
Triangulation Station	
Boundary Mon., Survey Mon.	
Bench Mark	
Spot Elevation, (in feet)	782
Building, Barn	
Mill or Factory, small Sawmill, etc.	
Church, Cemetery	
School, Post Office	
Mine or Open Cut	
Quarry	
Sand or Gravel Pit	
Lake or Pond, intermittent	
Lake or Shoreline, indelinite	
Stream, intermittent or dry	
Stream, indelinite	
Irrigation Canal or Ditch	
Marsh or Swamp	
Inundated Land	
Falls, Rapids	
Foreshore Flats	
Bluff Cliff or Escarpment	
Lighthouse	
Wharf or Pier, Ferry	
Contours:	
elevation	
depression	
approximate	
Wooded Area	
Orchard	

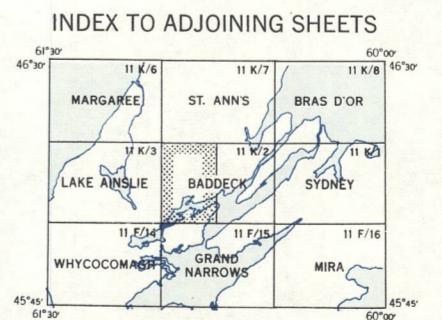

The general public may obtain copies of this map from the Map Distribution Office, Dept. of Mines and Technical Surveys, Ottawa, at 25 cents per copy.


BADDECK
NOVA SCOTIA
11 1/2 WEST HALF
FIRST EDITION

SUPERSEDED EDITION



Surveyed and compiled by the Topographical Survey, Dept. of Mines and Technical Surveys, 1948. Aerial photography by the R.C.A.F., 1939-45. Cartography by Map Compilation and Production, Dept. of Mines and Technical Surveys, 1950. Reproduced by the Army Survey Establishment, R.C.E. Dept. of National Defence, 1953.

MAGNETIC DECLINATION 26°54' WEST AT CENTRE OF SHEET, 1952. Annual magnetic change 2' easterly.

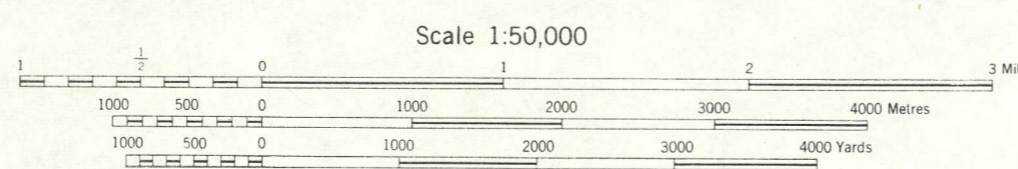

CONTOUR INTERVAL 50 FEET. All Elevations in Feet above Mean Sea Level.