

FARMERS! BENEFIT BY THESE BIG EATON 83⁵⁰ BARGAINS RELIABLE MANURE SPREADER

SOLD UNDER THE EATON GUARANTEE

FREIGHT
PAID

118⁵⁰

REGULAR
PRICE

STRONG AND
SOLIDLY
CONSTRUCTED

WILL GIVE YOU
EVERY
SATISFACTION

TAKE
ADVANTAGE
OF THIS
MONEY-
SAVING OFFER
IT WILL PAY YOU

SHIPPED FREIGHT PAID TO YOUR
NEAREST RAILROAD STATION

EASY RUNNING
AND
EASY TO LOAD.
WILL DO
YOUR
WORK RIGHT
UNDER ALL
CONDITIONS

83⁵⁰

FREIGHT PAID.

REGULAR PRICE
118.50

A SAVING TO
YOU OF \$35.00

ISN'T THAT WORTH
CONSIDERING?

CAPACITY 60 BUSHELS

NOTE THE DETAILS AND SIMPLE CONSTRUCTION:

Feed—Can be regulated to spread from 8 to 24 loads to the acre, as desired, by changing position of operating lever. This lever is within reach of driver and change can be made without stopping the team or driver leaving the seat. The feeding arrangement has few parts, is made strong, and will not clog or get out of order easily.

Drive—Sprocket and Chain Drive, which does the best work with the least draft. Both rear wheels are used to develop the power. The large sprocket wheel is bolted to the double left wheel clutch, which is key seated on the rear axle. The drive chain works on the drive sprocket and is automatically locked so that it is impossible for it to jump or slip no matter how heavy the load. Chain take-up allows you to take up any slack chain.

Beater or Cylinder made of steel entirely, no wood used. The cylinder is made up of nine cylinder bars $1\frac{1}{4} \times 7/16$ -inch steel, firmly bolted to large cylinder heads, 23 inches in diameter. The teeth are made of steel, extra tough, 7/16 square, and extend 4 inches outside of cylinder bar. Teeth have chisel points. The end of the tooth toughest manure and will help break up frozen chunks.

Endless Apron—The bottom of the Spreader is an endless apron consisting of a series of slats which work on rollers and always keep the load in such position that it is easily handled by the cylinder. As soon as the Spreader is put in operation the apron begins to move.

Truck—The truck or frame of the Spreader is built to withstand any strain the spreader can be put to in actual use. Every part of the truck is built of the best material, extra heavy. The wheels and axles are all steel, designed specially for manure spreader work. The front truck will turn short under the spreader, making it easy to get in or out of a very small space, which is very important when loading. The fifth wheel or circle iron is 15 inches in diameter, made of $1\frac{1}{2}$ -inch by $\frac{1}{4}$ -inch steel.

Body or Box—Built entirely of hardwood, strongly put together, fastened with bolts; tops of sides are bound with iron. Seat swings forward out of way when loading.

Track—Rear wheels do not track with front wheels. It has been proven beyond a doubt that the narrow track in front is a decided advantage. When both front and rear wheels track they cut a deep rut, in which the water stands. The short front axle is very desirous in square turning and is much easier on the horses' necks.

Rake—The rake is made of steel and when up it keeps the load from packing against the cylinder or beater. This rake raises automatically when the spreader is put in operation. When the spreader is not in operation or when loading, rake can be lowered and it acts as an end gate. The rake teeth are made of spring steel $16\frac{1}{2}$ inches long by $1\frac{1}{2}$ inches wide. Each rake tooth is furnished with a spring of 16 pounds tension and works independently of the others.

Easy Loading—The rear is lower than the centre, making spreader easy to load for any man or boy.

Specifications—Manure spreader, 60 bushels, inside measurement. Length $9\frac{1}{2}$ feet, width 40 ins., depth $19\frac{1}{4}$ ins. front, 23 ins. rear. Wheels, steel, 48 ins. rear, 23 ins. front. Tires, 4 ins. wide by $3/16$ ins. thick. Axles, 2 ins. rear, $1\frac{1}{2}$ ins. front. Length centre to centre of axles, 74 ins. Front track 43 ins. Rear track 60 ins. Height, centre of box, 54 ins.

VIEW
SHOWING
CYLINDER
CHAIN
DRIVE


71-17X. Complete Manure Spreader Shipped
Freight Paid to your Nearest Railroad
Station

83⁵⁰

WE ADVISE ORDERING EARLY AS THERE IS ONLY A
MODERATE NUMBER SET ASIDE FOR QUICK SELLING AT
THIS PHENOMENALLY LOW PRICE.

THE T. EATON CO LIMITED
TORONTO - CANADA

GENERAL PURPOSE FARM
FENCE AT A
SPECIALLY CLOSE PRICE 47c
PER ROD

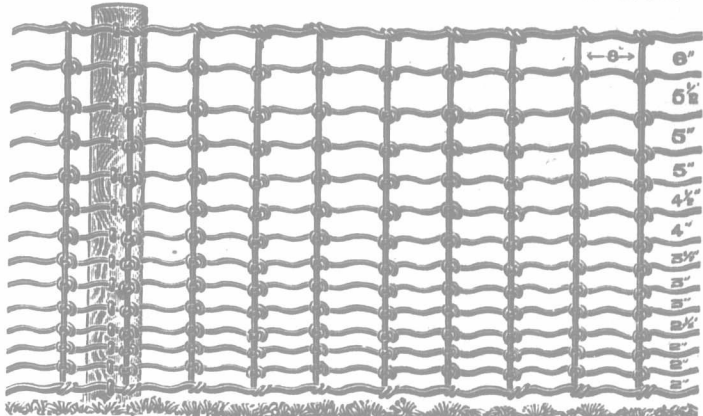

GALVANIZED AND PAINTED

3800 Rods Only of Medium Weight Fence for Poultry or
General Farm Use. Is 48 inches high and has 14-line wires. Top
and bottom No. 9, line wires No. 12, stays No. 13. Stays are 8 inches
apart and 25 stays to the rod. Spacings are 2, 2, 2, 3, 3, 3, 4, 4, 4,
5, 5, 5, 6 inches. A good strong general purpose fence, all
thoroughly galvanized and also painted white. Sold only in bales of
20, 30 and 40 rods. Quantity limited as above. Order Early.

71-18X. Freight Paid. Per rod. 47c