



CANADA
 DEPARTMENT OF
 MINES AND TECHNICAL SURVEYS
 SURVEYS AND MAPPING BRANCH

REFERENCE

- Roads:
 loose surface, all weather less than 2 lanes
 loose surface, dry weather
 Cart Track, Snow or Winter Road
 Trail or Portage
 Railways:
 standard gauge, multiple track Station
 standard gauge, single track Stop Siding
 abandoned
 narrow gauge, single track
 Cutting, embankment
 Bridges:
 road, railway
 overpass, underpass
 Boundaries:
 International
 Province or State
 District
 Township or Parish
 Reservation, Indian, Park, etc.
 Surveyed Line
 Power Transmission Line
 Telephone Line
 Horizontal Control Point
 Boundary Mon., Survey Mon.
 Bench Mark BM
 Spot Elevation, (in feet) 782
 Building: Barn B
 Mill or Factory, small, Sawmill, etc. SM
 Church: Cemetery C
 School: Post Office S P
 Mine or Open Cut M
 Quarry Q
 Sand or Gravel Pit
 Lake, intermittent or Pond
 Lake or Shoreline, indefinite
 Stream, intermittent or dry
 Stream, indefinite
 Irrigation Canal or Ditch
 Marsh or Swamp
 Inundated Land
 Falls, Rapids
 Foreshore Flats
 Bluff, Cliff or Escarpment
 Lighthouse
 Wharf or Pier, Ferry
 Breakwater
 Contours:
 elevation
 depression
 approximate
 Wooded Area
 Sand
 Silt

INDEX TO ADJOINING SHEETS


48°30'	53°45'	53°30'	53°15'
48°40'	2 D 9	2 C 12	2 C 11
	2 D 8	2 C 5	2 C 4
	2 B 1	2 C 4	2 C 3
48°30'	TUS POND	RANDON ISLAND	OLD PERLICAN
	48°30'	53°30'	53°00'

MAGNETIC DECLINATION 28°54' WEST,
 AT CENTRE OF SHEET 1951.
 Annual magnetic change 3'30" easterly.

SWEET BAY
 NEWFOUNDLAND
 2 2/5 EAST HALF
 FIRST EDITION

SUPERSEDED EDITION

Produced by the Surveys and Mapping Branch,
 Department of Mines and Technical Surveys, 1950,
 from air photographs taken in 1948.
 Printed by the Army Survey Establishment, R.C.E.,
 Department of National Defence, 1954.
 Copies may be obtained from the Map Distribution
 Office, Department of Mines and Technical Surveys,
 Ottawa, at 25 cents per copy.

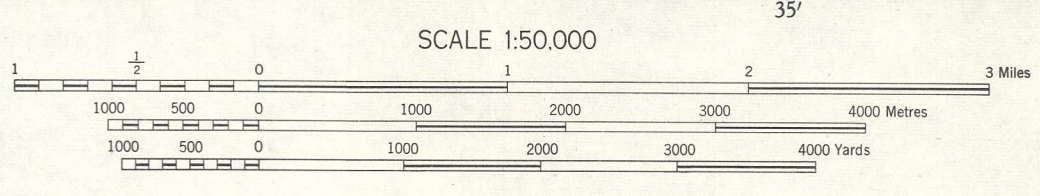

CONTOUR INTERVAL 50 FEET
 All Elevations in Feet above Mean Sea Level