


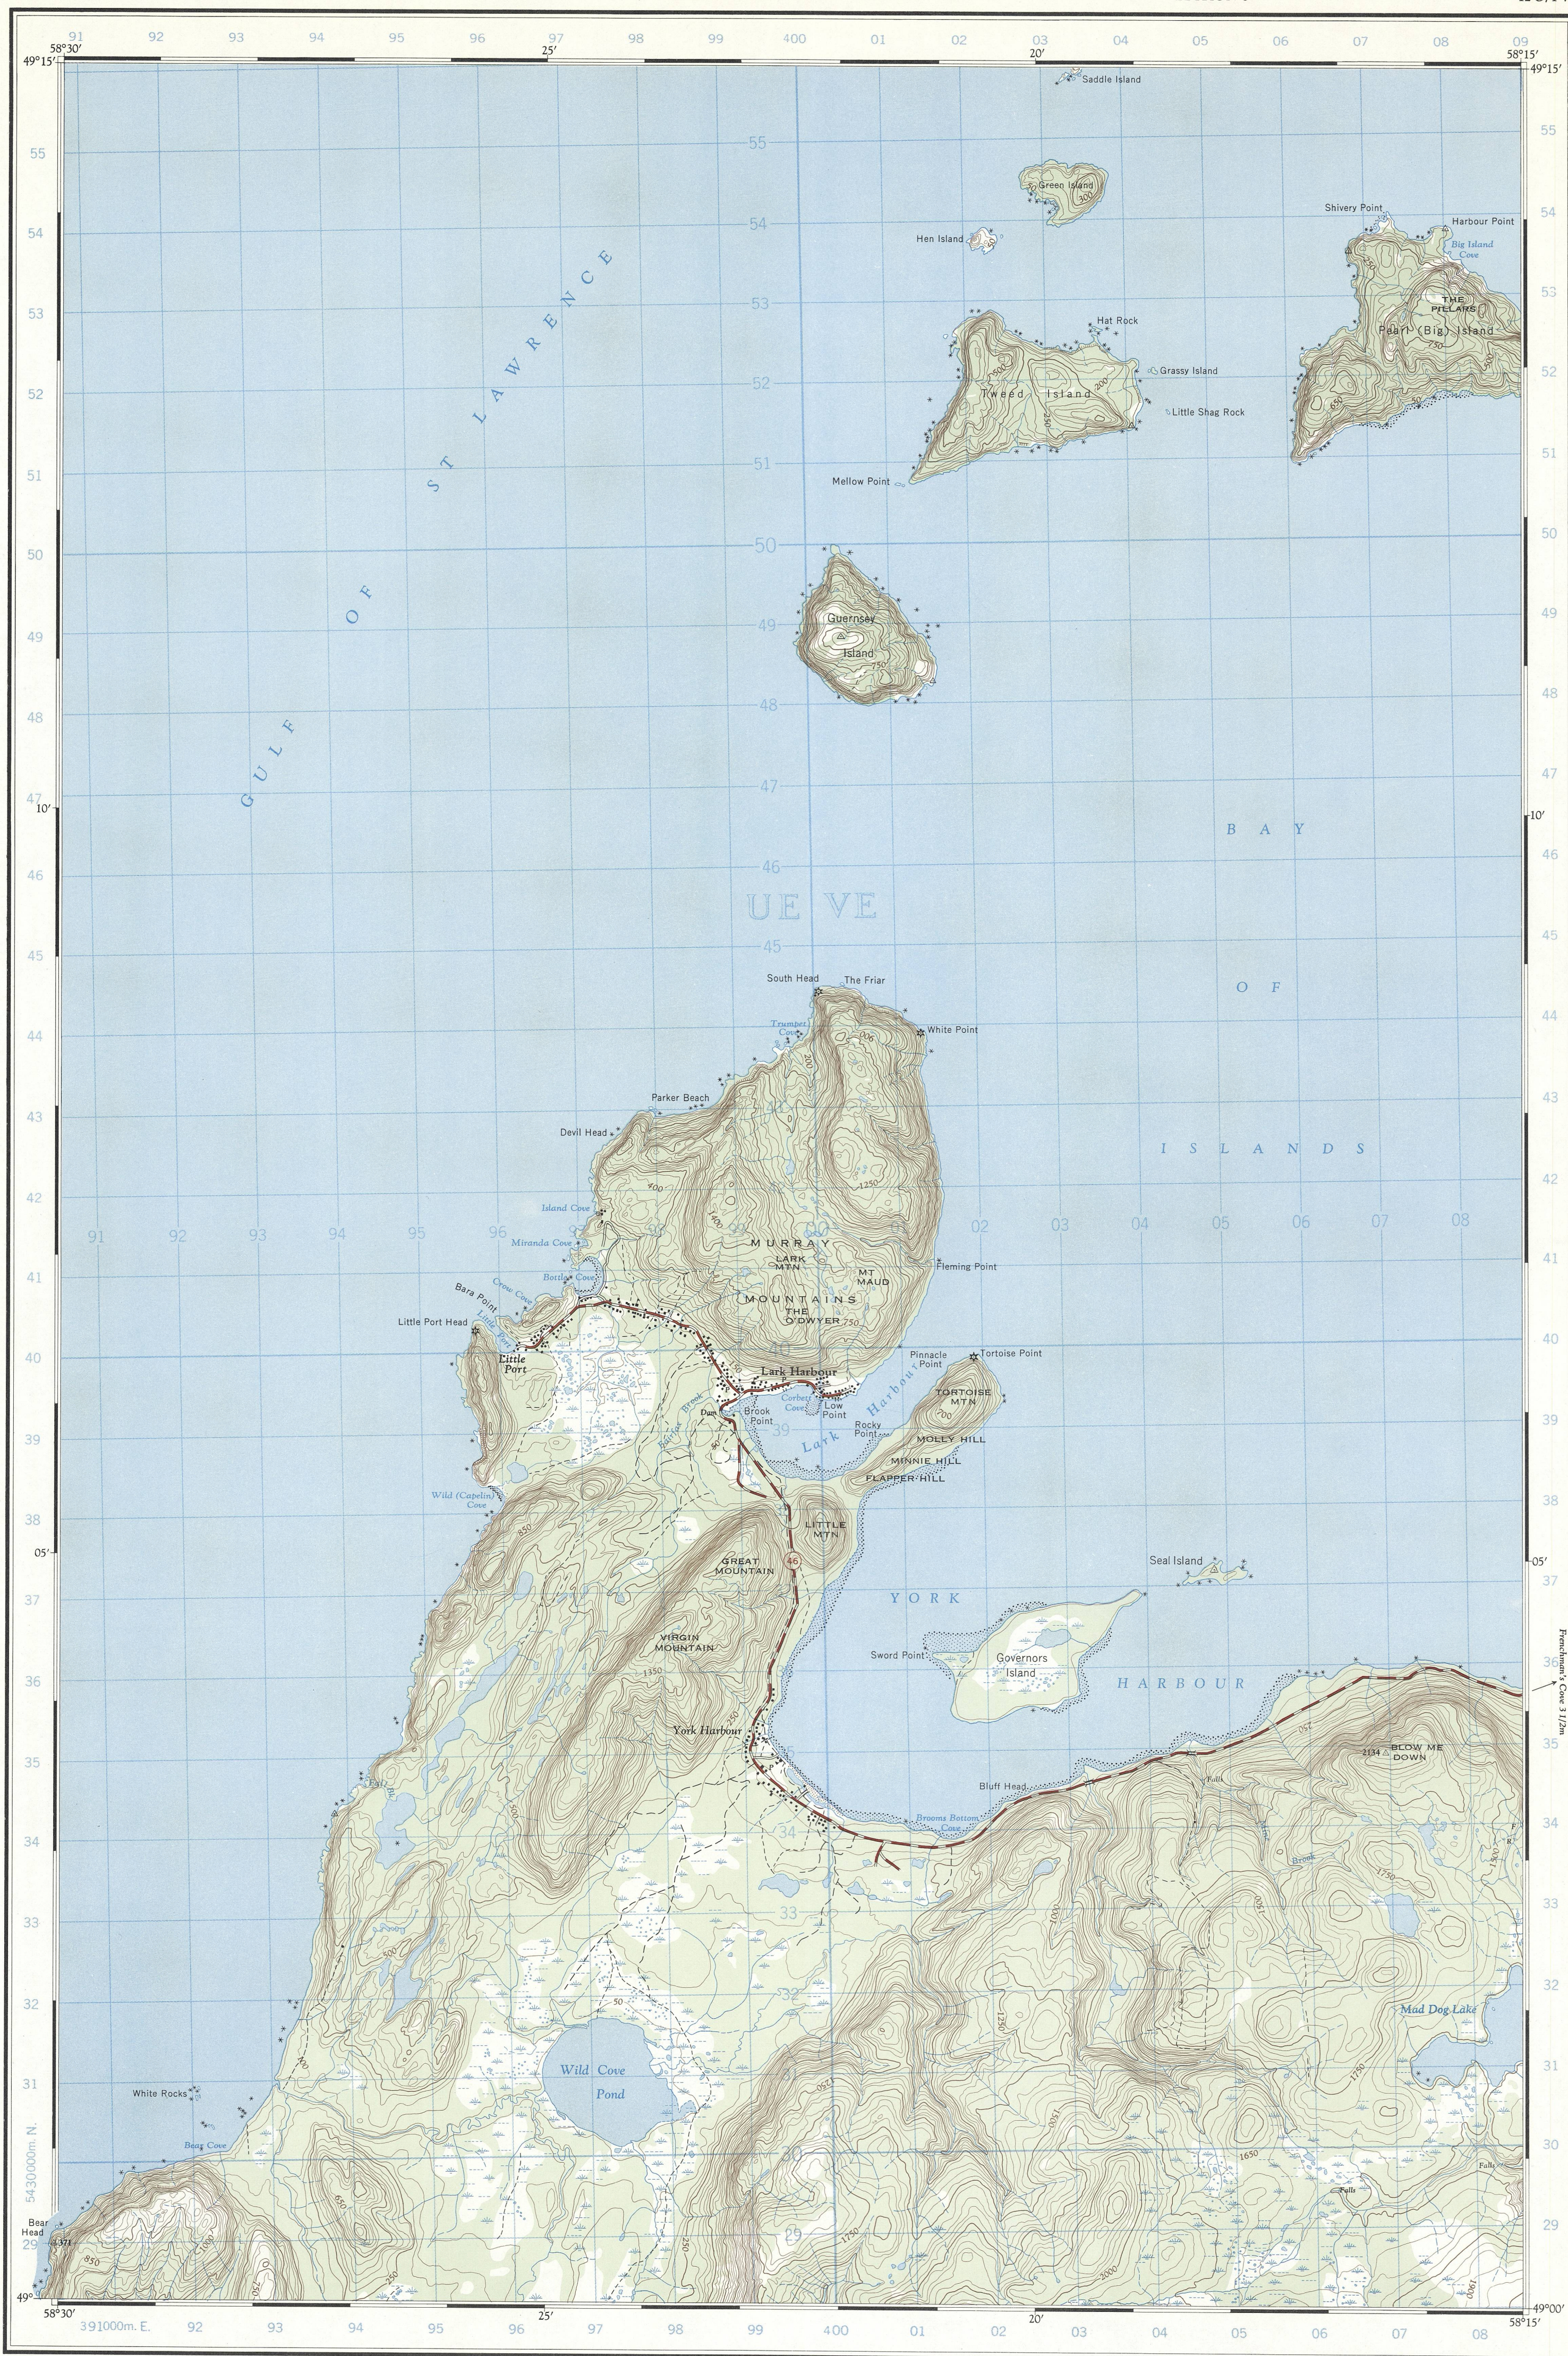


Surveyed and compiled by the SURVEYS AND MAPPING BRANCH,
DEPARTMENT OF MINES AND TECHNICAL SURVEYS, produced
by the ARMY SURVEY ESTABLISHMENT, R.C.E.
Information depicted current as of 1965. Printed 1965.
Copies may be obtained from the Map Distribution Office,
Department of Mines and Technical Surveys, Ottawa.

BAY OF ISLANDS

HUMBER WEST DISTRICT

NEWFOUNDLAND

SCALE 1:50,000 ÉCHELLE



Roads:	Routes:
hard surface, all weather	more than 2 lanes
hard surface, all weather	2 lanes
loose surface, all weather	more than 2 lanes
loose surface, dry weather	2 lanes
cart track	less than 2 lanes
trail or portage	sentier ou portage
Railway, narrow gauge, single track	Chemin de fer, voie unique (écartement étroit)
Horizontal control point, with elevation	Point géodésique, avec cote
Bench mark, with elevation	Repère de nivellement, avec cote
Spot elevation, precise, approximate	Point coté, précis, approximatif
	400 450 500

CONTOUR INTERVAL 50 FEET
Elevations in Feet above Mean Sea Level

Transverse Mercator Projection
North American Datum 1927

MAGNETIC DECLINATION 28°23' WEST
AT CENTRE OF MAP 1965
Annual change decreasing 3.2'

ÉQUIDISTANCE DES COURBES 50 PIEDS
Élévations en pieds au-dessus du niveau moyen de la mer


Projection transverse de Mercator
Réseau géodésique nord-américain unifié 1927

DÉCLINAISON MAGNÉTIQUE AU CENTRE
DE LA FEUILLE EN 1965: 28°23' OUEST
Variation annuelle décroissant 3.2'

Building	Bâtiment	Church	Église
School	École	Post Office	Bureau de poste
Cemetery	Cimetière		
Mine or Open cut	Mine ou fosse à ciel ouvert		
Lighthouse	Phare		
Power transmission line	Ligne de transport d'énergie		
River with bridge	Rivière avec pont		
Stream, intermittent or dry	Cours d'eau intermittent, ou à sec		
Lake intermittent, indefinite	Lac intermittent, rive imprécise		
Marsh or Swamp	Marais ou marécage		
Depression contours	Courbes de cuvette		

Refer to
this map as:
12 G/1 W
EDITION 3 ASE
SERIES A 781

CONVERSION SCALE FOR ELEVATIONS
Feet
Metres

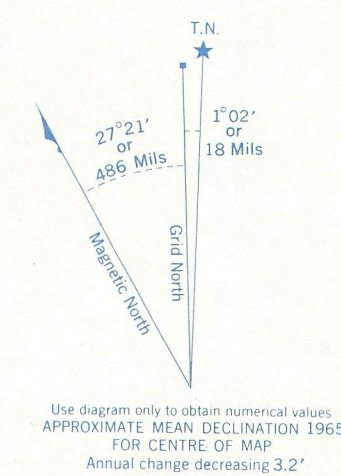

Use diagram only to obtain numerical values
APPROXIMATE MEAN DECLINATION 1965
FOR CENTRE OF MAP
Annual change decreasing 3.2'

GRID ZONE DESIGNATION	100,000 M. SQUARE IDENTIFICATION
21U	UEVE

TO GIVE A REFERENCE TO NEAREST 100 METRES
EXAMPLE: LIGHTHOUSE
EASTING: Read number on grid line
immediately to left of point.
Estimate tenths of a square from
this line toward to point.
NORTHING: Read number on grid line
immediately below point.
Estimate tenths of a square from
this line toward to point.
MILITARY GRID REFERENCE
Nearest similar grid reference 100,000 metres (about 63 miles)

ONE THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 21

12 G/1 E	12 G/1 W	12 G/1 E
12 G/2 E	12 G/1 W	12 G/1 E
12 G/15 E	12 G/16 W	12 G/16 E

INDEX TO ADJOINING MAPS OF
THE NATIONAL TOPOGRAPHIC SYSTEM

BAY OF ISLANDS

12 G/1 W

EDITION 3

**SUPERSEDED
EDITION**