


KING'S COLLEGE HOSPITAL BLOCK PLAN.

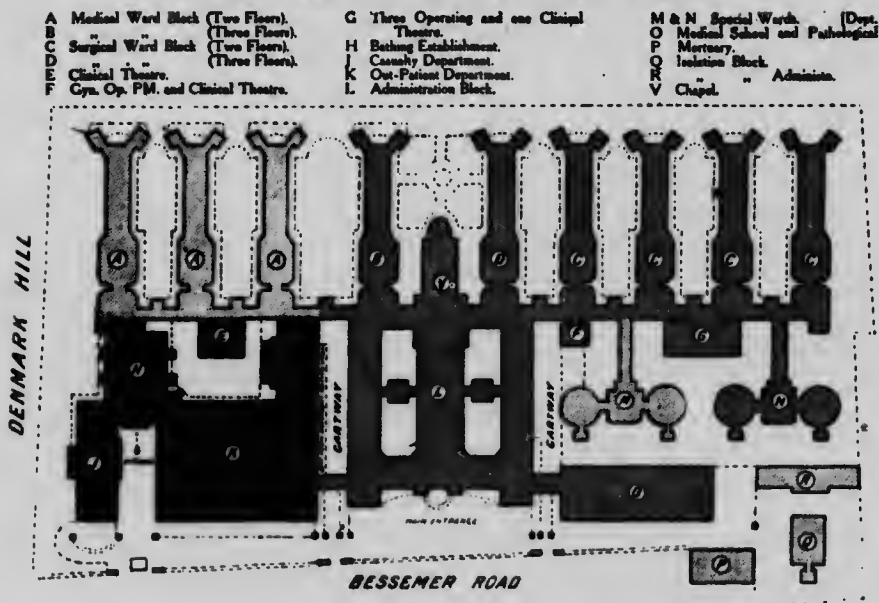

Between the two corridors by which adult patients enter there is a good-sized room which is occupied by the porter and the admitting clerk. On the opposite side of each corridor is a toilet room. These corridors lead into a large reception room, beyond which is the great main waiting hall 90 feet in length by 43 feet in width. The height is 35 feet, I should guess. Running all round this commodious room and well lighted is a low arched corridor, connected with the main waiting room by three entrances on each side. On the opposite side of this low arched corridor are many doors leading to the medical surgical, gynæcological and other divisions, the rooms of which are ample, light and well provided with wash basins.

A buffet will be provided in the centre of the main waiting hall, and a separate tea room is provided with scullery adjoining. The walls of this room are of terra cotta, the