


CUNNINGHAM'S PATENT OSCILLATING TWIN ENGINE

FOR STEAM FEED IN CIRCULAR MILLS WITH RACK OR ROPE.

This Engine has practically but two moving parts, aside from cranks and shafts. The whole array of eccentrics, valves, valve rods, connecting rods, cross heads, slides, levers, rock shafts, bell cranks, etc., is done away with, and the very perfection of simplicity, compactness, durability and cheapness attained.

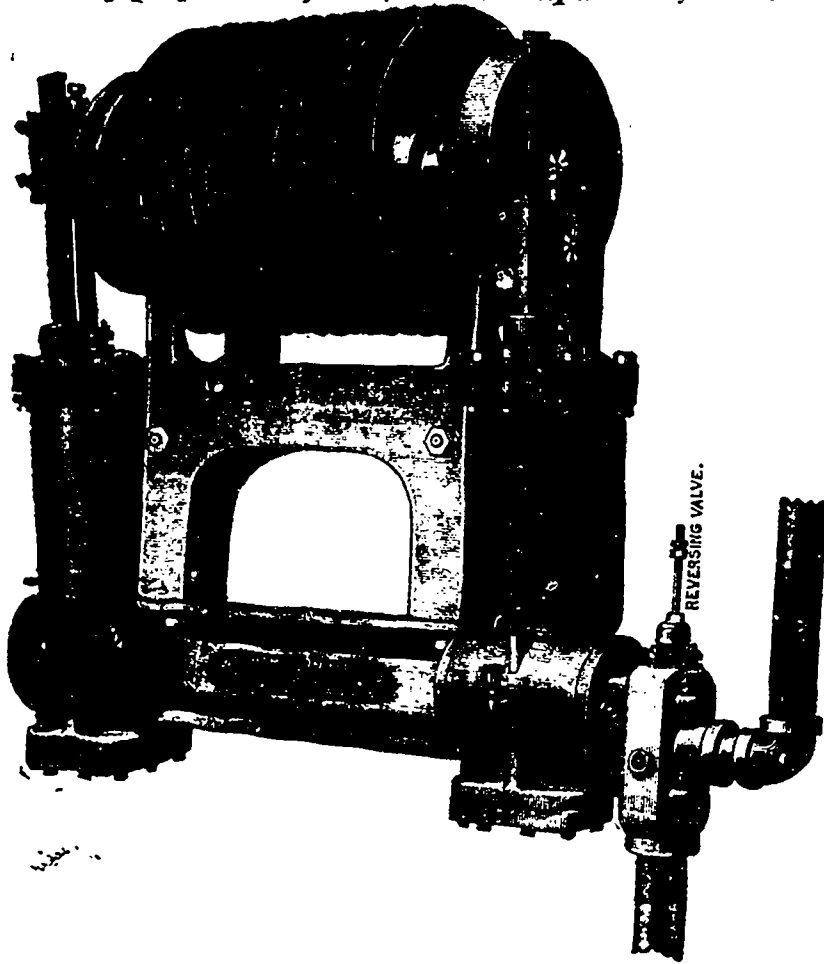

The above engraving illustrates the Twin Engine, 10x16, for Rope Feed, for Saw Mill Carriages. The spool is 27 in. diameter, 30 in. face, is grooved 2 in. pitch for 1½ in. rope. The shaft is steel, 4½ in. diameter, with disk cranks. No connecting rods, eccentrics or valve rods to get loose and out of order. The ports are in the trunions, and worked by an oscillation of the cylinders, and are held in their place in the downward motion by a steam cushion below. The sawyer's valve is a perfect balance, and by moving this valve the engine can be reversed, stopped or started almost instantaneously if necessary, as the sawyer has perfect control of it by his lever either to go fast or slow. Should the sawyer let go of his lever either by mistake or any other cause, it is balanced so that the valve will come to the centre and cut the steam off both cylinders and stop the feed. When standing, the lever is locked or fastened, so that it is impossible for it to start off itself. The engine stands upright below the carriage, and bolted to two upright beams, placed on the mill for the purpose. When a rack is preferred in place of the rope, we put on a steel wheel 30 in. in diameter, and the engine placed high enough to work into the rack on carriage bar, or if the beams come in the way, an idler wheel can be used between engine and rack segs; or, the engine can be placed at a distance and have a shaft

from it to the carriage; or it can be placed in the engine room, where it is under the control of the engineer for oiling, thence by shaft and pinion to carriage rack bars. These engines are well adapted for cutting long logs, or where the logs are mixed, the advantage of this feed will be apparent to mill men. When the carriages are used in two or more sections, the coupling and uncoupling of each section is quick and simple.

There were two of these feeds working this summer and giving the best of satisfaction, one with rope feed at James Playfair & Co's Mill, Sturgeon Bay, near Waubaushene, and one at the new mill furnished by us to Francis Carswell & Co., at Calabogie Lake, on the Kingston and Pembroke R. R. This mill is working with the Rack and Pinion feed, and drops from fifteen to seventeen stock boards per minute. We have also sent one to the Rathbun Company, Deseronto, to put in to feed their heavy Circular Mills. They will also commend themselves for various other cases, especially for running Elevators, hoisting Engines, and wherever a simple and easily reversible motion is required.

We would also call attention to our Improved Band Saw-Mill for cutting logs

We guarantee this to be the best Mill of its kind got up, and would ask any one wanting a good Band Saw-Mill to communicate with us. We would also call the attention of Mill Men to our new IRON GANGS, CIRCULAR MILLS and MILL MACHINERY. For further information, prices, &c., address the Manufacturers,

The Wm. Hamilton Manufacturing Co'y, Limited

PETERBOROUGH