


# THE "NOGO" SURFACE CATTLE GUARD


OSCILLATING SLATS—(Patented)

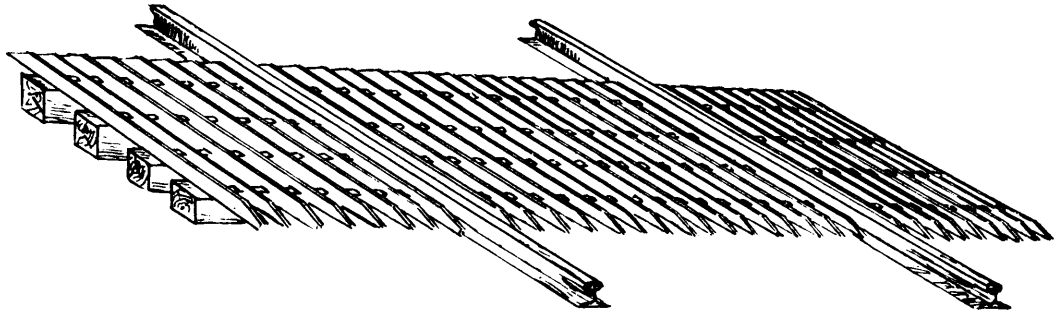

No Extra Ties


No Shimming

No Excavating

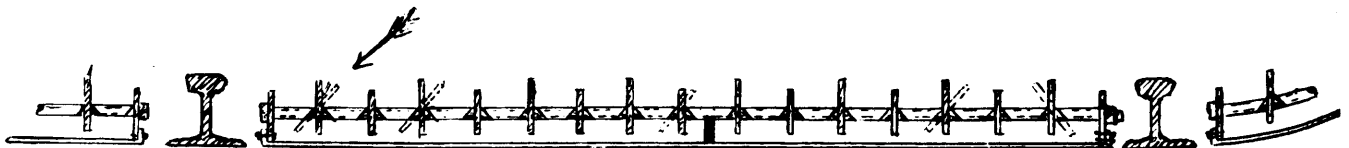

CROSS SECTION

"NOGO" No. 1, STEEL SLATS

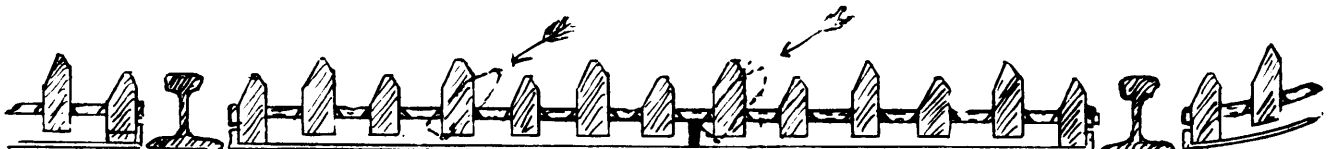

CROSS SECTION

"NOGO" No. 2, WOOD SLATS

This is a strictly Surface Guard, the chief feature of which is the Oscillating Movement of the slat stepped upon, spreading the hoof and affording an unsteady footing for the animal. Made with iron frame, with either  $\frac{3}{16}$  in. steel or  $1\frac{3}{4}$  in. wood slat.

MOST NEARLY EFFECTIVE SURFACE GUARD AT THE GOVERNMENT TESTS,

OTTAWA, 1903.

**SIMPLE**

**DURABLE**

**EFFECTIVE**

FOR PLANS AND PRICES, APPLY TO

**S. A. ARMSTRONG - - - Lindsay, Ont.**