

Fig. 25 shows the usual forms of steel and wood slats used. The first two views show the concave and convex sides of the No. 2 steel slat with alternate end locks. Next two views show the No. 2 steel slat with special continuous end locks. Note that both surfaces of slats shed water. The upper two sections of wood slats show the form adopted for exterior exposures and the lower two forms adopted for interior partitions. The former are strung on ribbons and the latter on cables, all being of phosphor bronze.

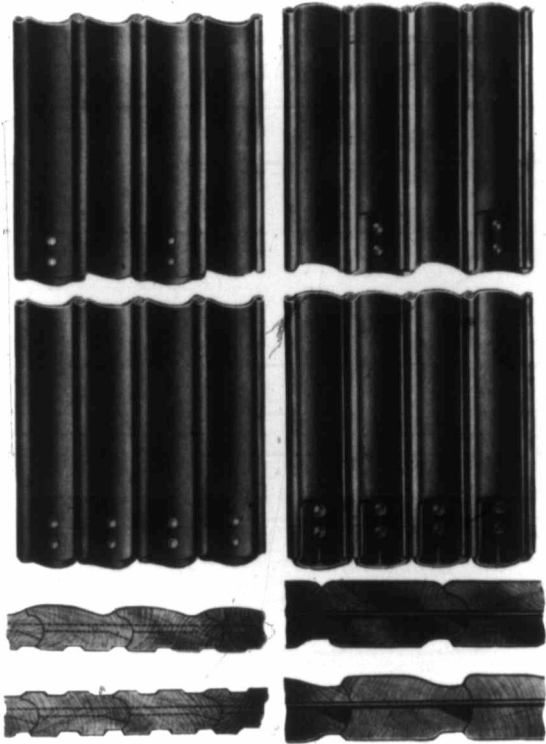


Fig. 25.

PROJECTIONS:—Below are shown the salient projections dimensions of steel Rolling Doors for the usual method of application.

Dimension P. applies only to face of wall projection.

Dimensions D. & W. only to between jamb construction.

Dimension A. only to chain hoist side of hoist operated between jam shutters.

For all unusual applications we suggest direct correspondence.



Fig. 26.