


...HOYT PATTERN... AMERICAN NOS. 45 and 46 DOUBLE SURFACERS

Work 26 inches and 30 inches wide by 8 inches thick.

.. SUBSTANTIAL ..

.. POWERFUL ..

.. RAPID ..

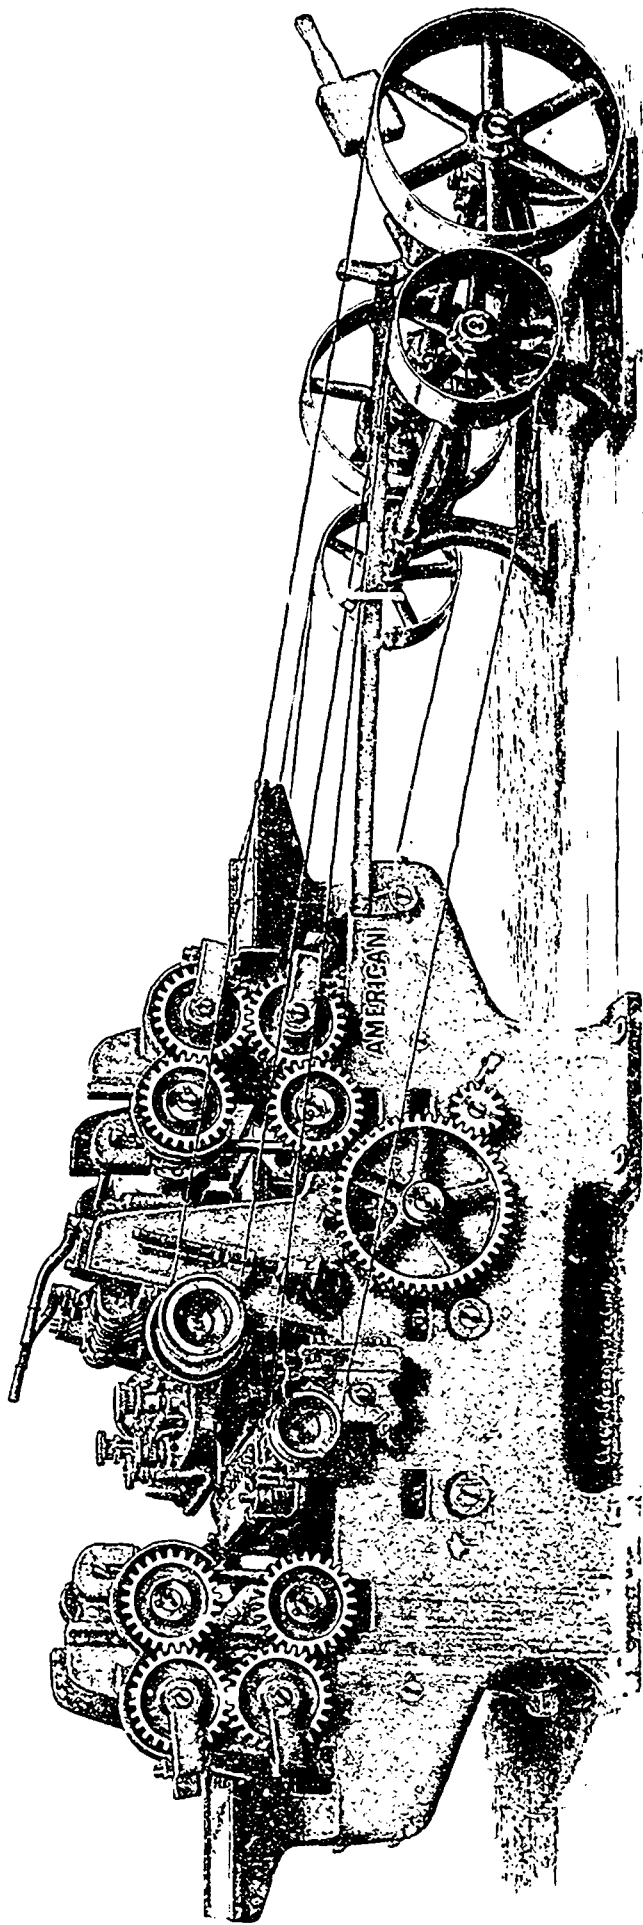


Four strongly geared feed rolls. The upper in-feeding rolls are divided into six sections, permitting six pieces of lumber varying in thickness to be surfaced at the same time, and by our parallel lifting device and heavy pressure each section rests firmly on each piece. Stock as short as 12 inches in length can be readily surfaced.

Top and bottom cylinders are interchangeable, four-sided, carrying two knives. The Journals are large in diameter, running in long self-oiling boxes.

The Top Chip Breakers and pony roll are divided into six sections, acting independently and lay very close to the cut.

All driving gears and pinions are mounted on shafts which run in self-oiling boxes. They are heavy and strong, allowing a wide range of feed.

For full detail information, prices and catalogue, address nearest salesroom.

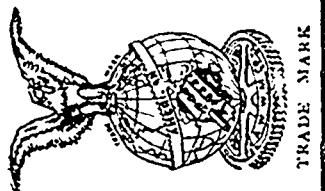

AMERICAN WOODWORKING MACHINERY COMPANY

BRITISH COLUMBIA AG-NCY:

The FAIRBANKS CO., Vancouver, B.C.

NEW YORK, 136 Liberty St.

