



CANADA

DEPARTMENT OF NATIONAL DEFENCE
ARMY SURVEY ESTABLISHMENT

REFERENCE

- Roads:
hard surface, heavy duty 3 or more lanes Part completed
hard surface, heavy duty 2 lanes 12
hard surface, medium duty 3 or more lanes 2 lanes
loose surface, graded and drained 2 or more lanes
Other Roads:
Private Road
Trail
Railway, double track
single track
abandoned
narrow gauge or electric
Bridge, underpass or overpass
Boundaries, International
Provincial
County
Township, Seignior or Parish
Electric Power Line
Telephone, trunk route
Triangulation Station
Boundary or Survey Monument
Bench Mark
Spot Elevation, (in feet)
House, Barn
Buildings
Mill or Factory, small, Saw Mill, etc.
School
Church
Post Office
Telephone Exchange
Mine or Open Cut
Cemetery or Churchyard
Quarry
Sand or Gravel Pit
Cliff
Cutting
Embankment, Dump, etc.
Lighthouse
Wharf or Pier
Foreshore Flats
Swamp or Marsh
Lake or Slough, non permanent
Glacier or Snowfield
Stream, intermittent
Contours, elevation
depression
Wooded Areas, heavy
light

INDEX TO ADJOINING SHEETS

40 $P/6$	30 $M/5$	30 $M/6$
40 $P/1$	30 $M/4$	30 $M/5$
40 $M/6$	30 $M/3$	30 $M/4$


See "Index to Maps Available" for sheets published.

The general public may obtain copies of this map from the Map Distribution Office, Dept. of Mines and Technical Surveys, Ottawa, at 25 cents per copy.

GRIMSBY
ONTARIO
30 $M/4$ EAST HALF
THIRD EDITION

Original Survey by the Army Survey Establishment R.C.E. 1905.
Aerial photography by the R.C.A.F. 1934.
Revised, compiled, drawn and printed by the A.S.E. 1935.
Partially revised with aerial photography and converted from the 1:63,360 map to 1:50,000 by the A.S.E. 1952.

MAGNETIC DECLINATION $6^{\circ}44'$ WEST
AT CENTRE OF SHEET, 1952
Annual magnetic change $1'$ easterly

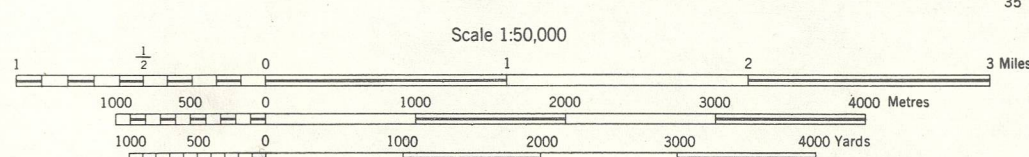

CONTOUR INTERVAL 25 FEET
All Elevations in Feet above Mean Sea Level

SUPERSEDED
EDITION