


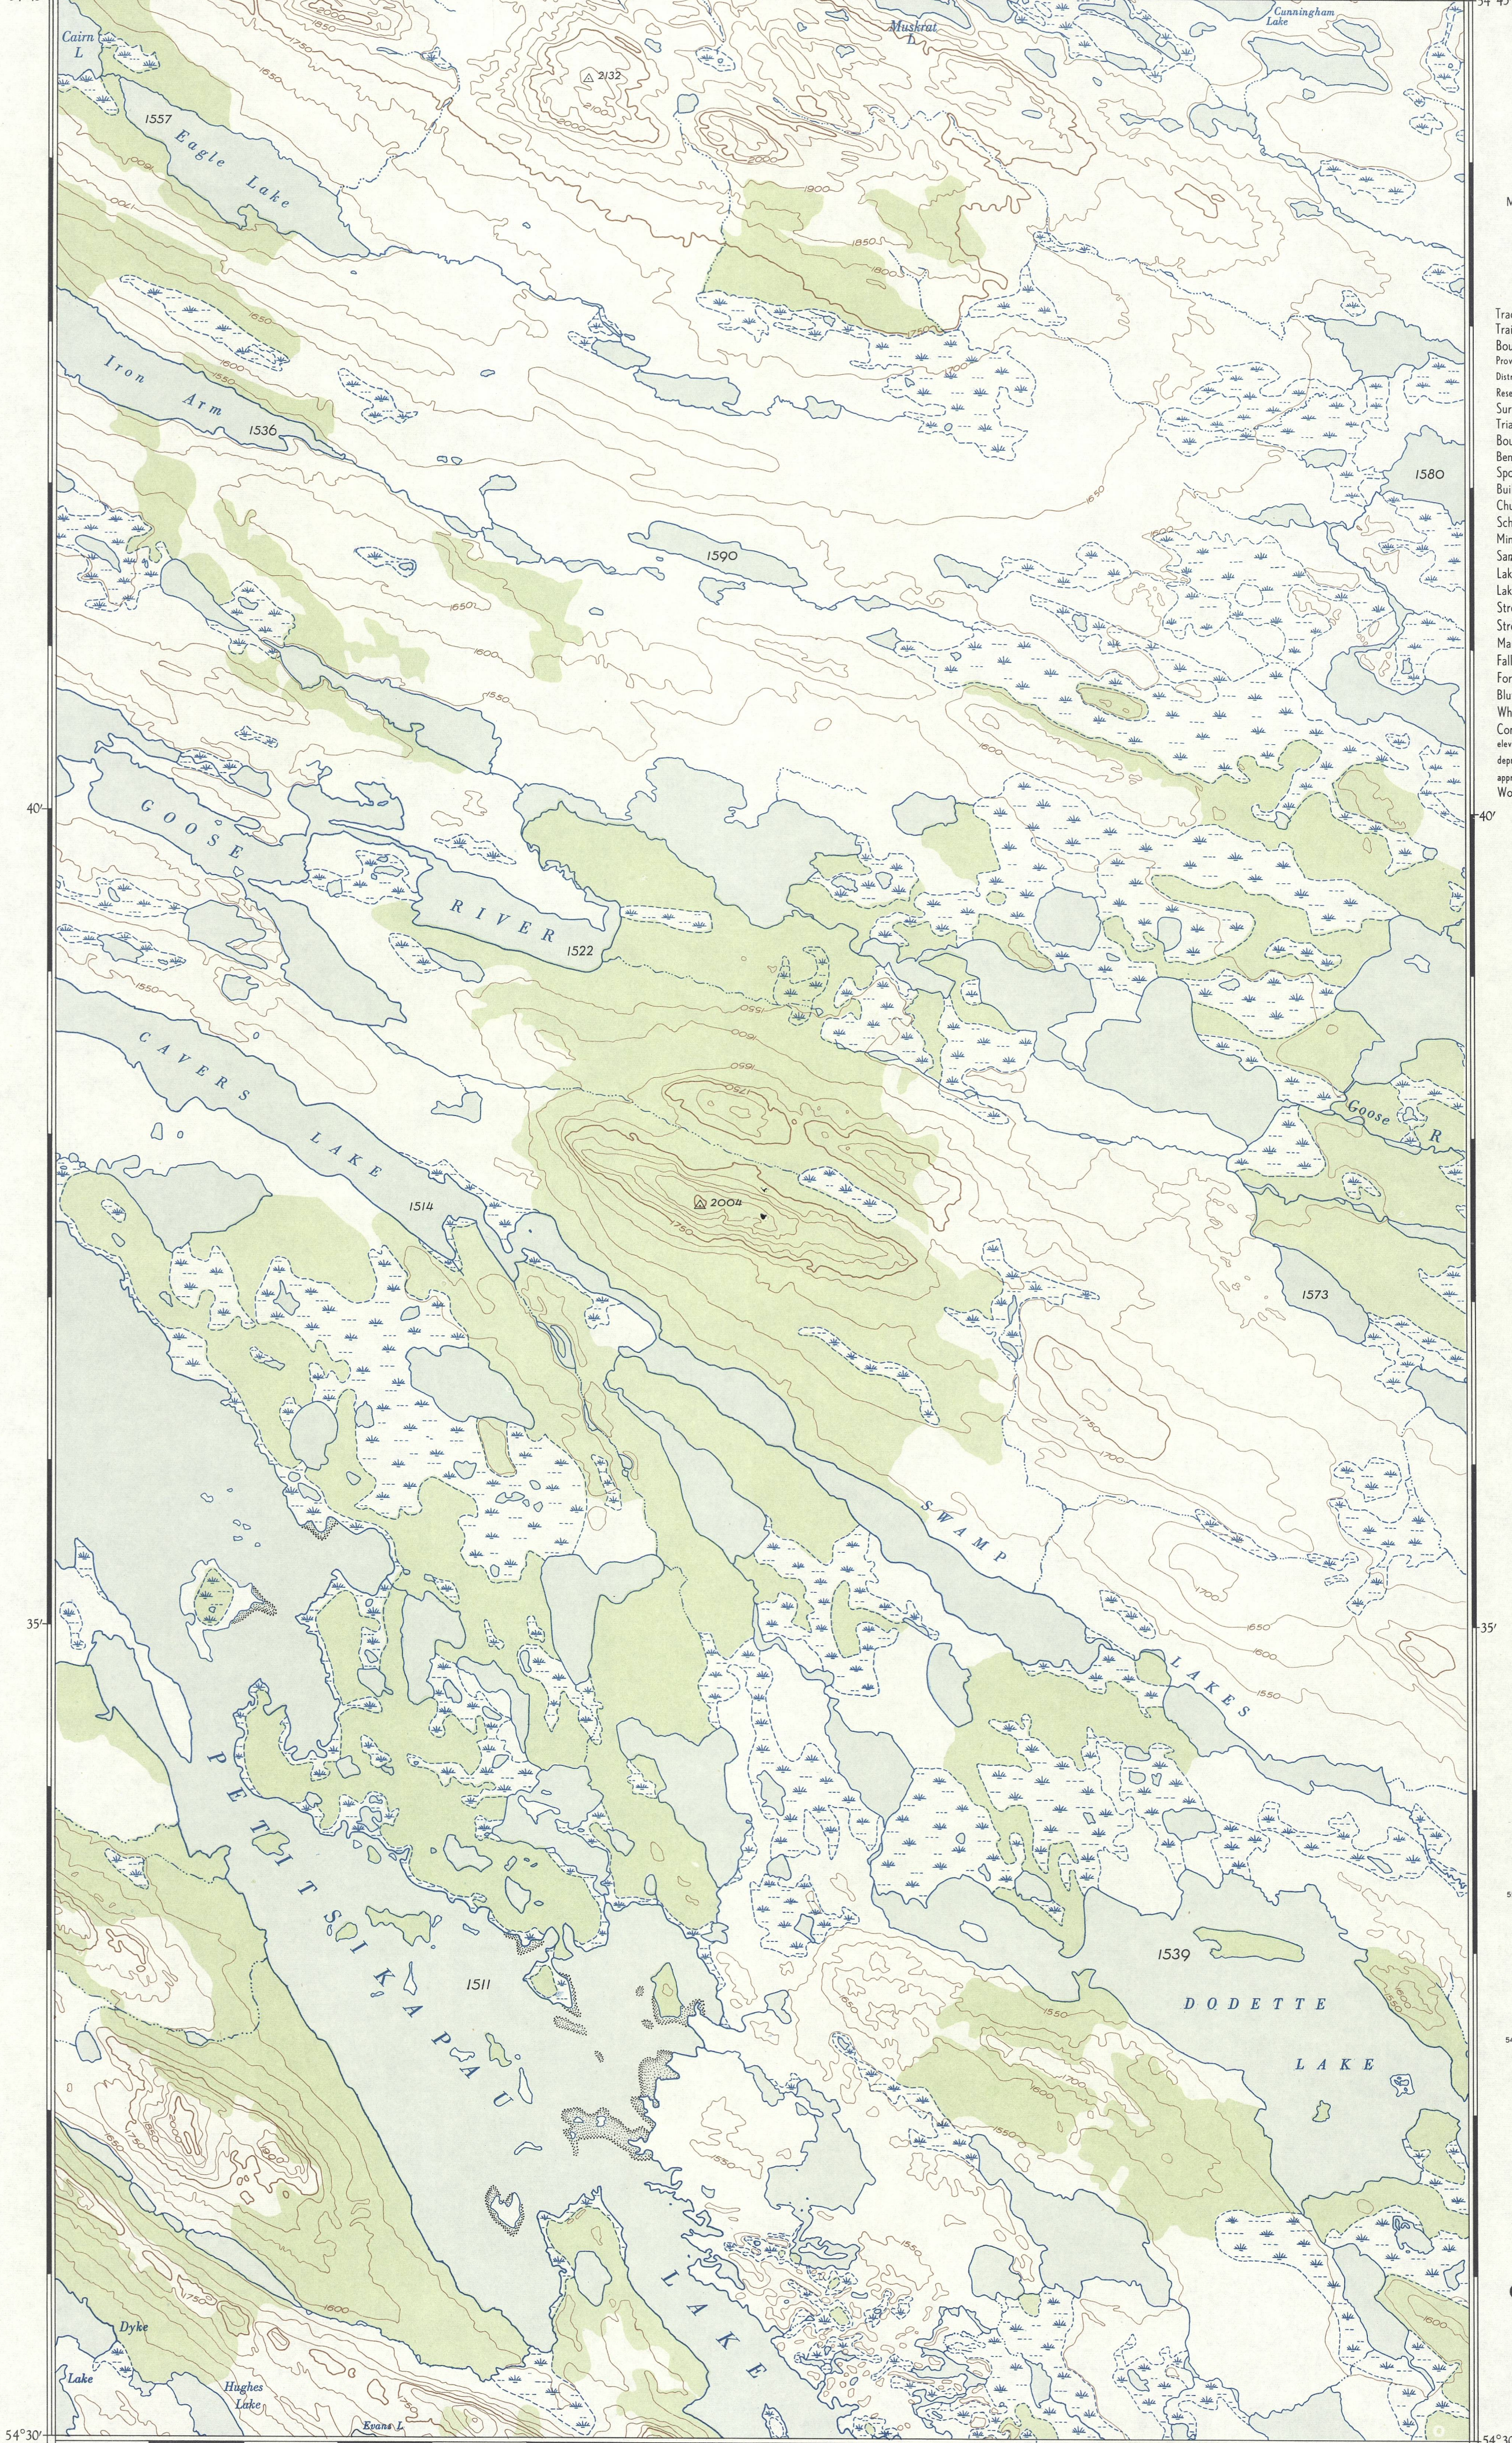

CANADA  
DEPARTMENT OF  
MINES AND TECHNICAL SURVEYS  
SURVEYS AND MAPPING BRANCH

REFERENCE

- Tractor Route, Snow or Winter Road  
Trail or Portage  
Boundaries:  
Provincial  
District  
Reservation, Indian, Park, etc.  
Surveyed Line  
Triangulation Station  
Boundary Mon., Survey Mon.  
Bench Mark  
Spot Elevation, (in feet)  
Building  
Church, Cemetery  
School, Post Office  
Mine or Open Cut  
Sand or Gravel Pit  
Lake, intermittent or Slough  
Lake or Shoreline, indefinite  
Stream, intermittent or dry  
Stream, indefinite  
Marsh or Swamp  
Falls, Rapids  
Foreshore Flats  
Bluff, Cliff or Escarpment  
Wharf or Pier  
Contours:  
elevation  
depression  
approximate  
Wooded Area

|        |                |                   |                |
|--------|----------------|-------------------|----------------|
| 67°00' | 23.1/15        | 23.1/16           | 23.1/17        |
| 55°00' | KNOB<br>LAKE   | HOLLINGER<br>LAKE | MARION<br>LAKE |
|        | 23.1/10        | 23.1/18           | 23.1/12        |
|        | STARK<br>LAKE  | CAVERS<br>LAKE    | ANDRE<br>LAKE  |
|        | 23.1/7         | 23.1/9            | 23.1/5         |
|        | MENHEK<br>LAKE | MARBLE<br>LAKE    |                |
| 54°15' | 67°00'         | 67°00'            | 67°00'         |


INDEX TO ADJOINING SHEETS

MAGNETIC DECLINATION 32°00' WEST,  
AT CENTRE OF SHEET, 1951.  
Annual magnetic change 4' easterly.

CAVERS LAKE  
NEWFOUNDLAND


23 1/2 EAST HALF  
FIRST EDITION

Surveyed by the Topographical Survey in 1949. Compiled  
by the Topographical Survey in 1950, from air photographs  
taken in 1946.  
Lithographed and printed by the Army Survey Est., R.C.E.,  
Department of National Defence, 1953.  
Copies may be obtained from the Map Distribution Office,  
Dept. of Mines and Technical Surveys, Ottawa. Price 25 cents

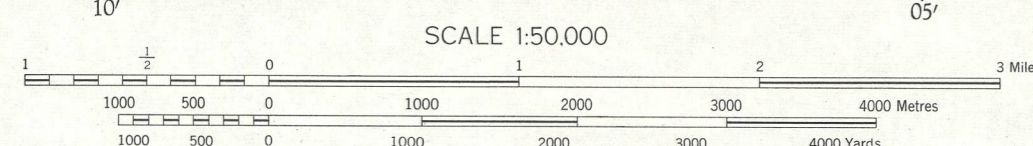

Elevations, in feet, based on Geodetic  
Vertical Angulation referred to sea level.

CONTOUR INTERVAL 50 FEET



SUPERSEDED  
EDITION