



BUTLER DRAWBAR ATTACHMENTS.

DETAILS OF PARTS.

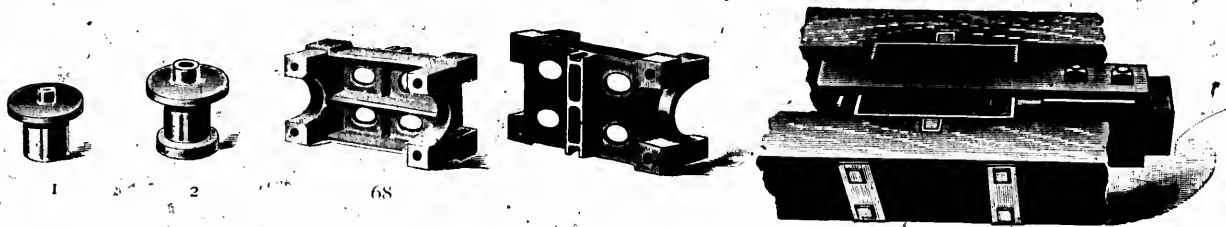

Castings shown above represent our No. 68 Attachment. If you use a 6x7½ inch draft spring, add two ¼ inch washers, you will have same compression as though you used an 8 inch spring. We make ¼ inch washers for this purpose.

PLAN OF APPLICATION.

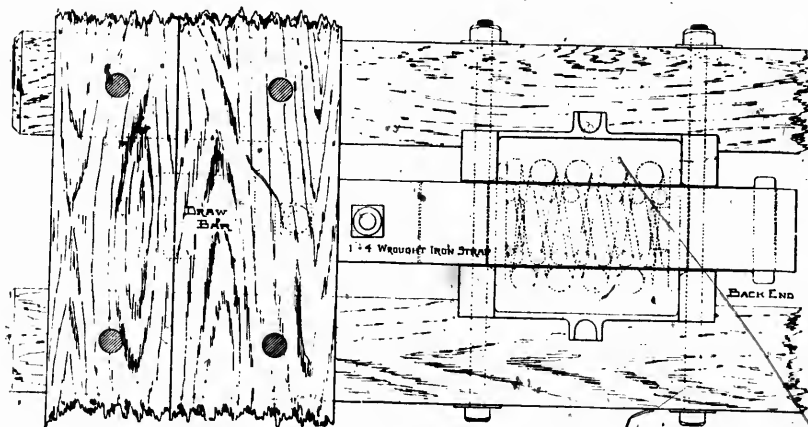

This illustration represents a set of No. 68 Butler Drawbar Attachments, applied as we recommend. We show an 1x4 inch wrought strap or yoke, a less size can be used if desired. Yoke cannot get out of place on account of side walls. No bolt through center necessary to hold springs in position.