



7. The strictest attention should be paid to cleanliness. For this purpose the floor should be watered and swept, and the benches wiped down every day. It would be desirable also that once or twice a month, on Saturday, the floor should be thoroughly washed and the windows cleaned. The walls should also be kept clean and sweet by washing them with lime once or twice a year.

Plan of Benches and Desks.

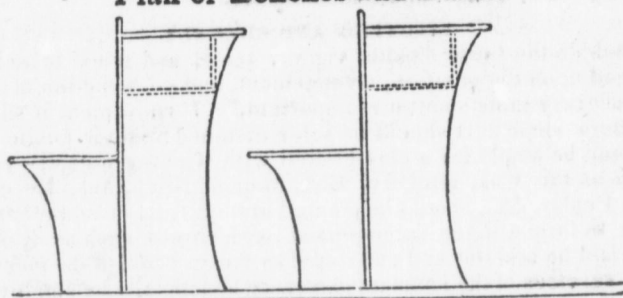

Plan for heating by Hot Air without a Stove.

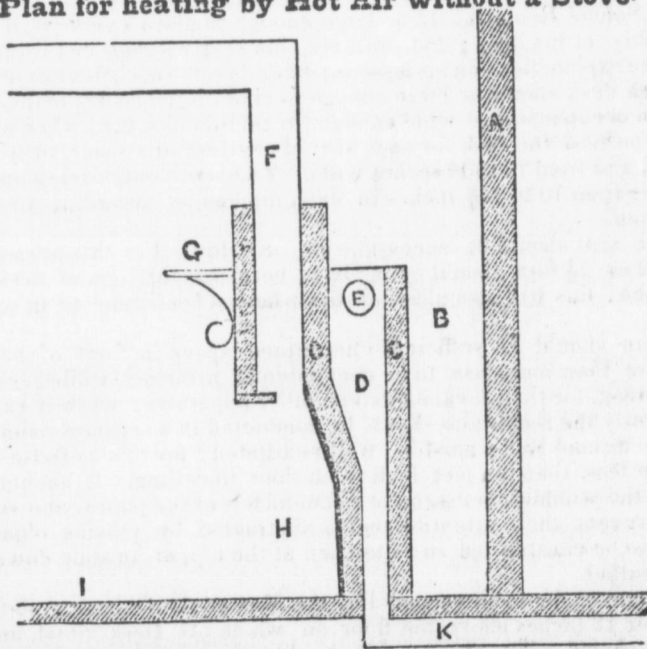

H Fireplace. B Space between Hot Chamber and Wall. C Brick Walls 4 inches thick. D Hot Air Chamber. E Opening for the escape or shutting off Hot Air. K Air Box for the supply of fresh air, extending beneath the floor to the front door. F Iron Smoke-flue 8 inches diameter. G Front of the Fire-place and Mantle-piece. I Solid Hearth.

The above Plan has many advantages. It secures a more equable diffusion of heat, and may be regulated with ease by means of sheet iron Doors to the Fire-place and an apparatus for opening and shutting at E. Besides, the atmosphere will be more favorable to health than where a Stove is used. It will be seen that whenever the back of the Fire-place gets heated the air behind in D gets rarified, and the cold air entering at K makes a continual ascending current and forces the hot air out at E into the room.

Th
Bibl
lions
drive
not
num
little
and
“
vinc
let u
whic
ties
offer
by th
it att
moni
delic
God
truth
relig
grace
of fa
man,
back
heart
exter
it, “
Th
most
from
Certe
conso
of sa
temp
worl
their
new
being
phil
fisher
from
W
and C
from
found
ons, y
guish