
Variable Feed Scantling Sawing Machine

..... The utility of this machine will be recognized by Millmen

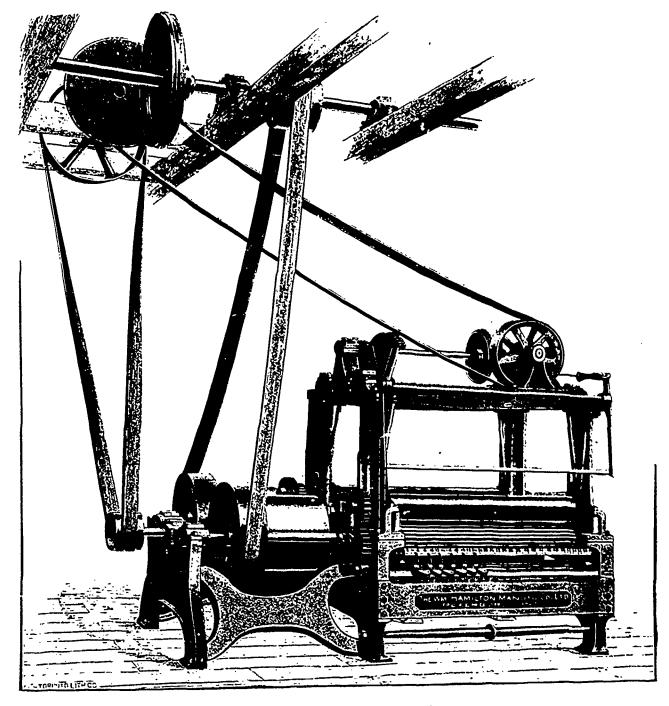

ADE in any width required. The operator can change feed at will. Will cut stock up to eight inches thick. All the saws can be made to move and come within three inches of each other. Outside bearing on mandril made to slip from its position when changing saws. The feed and press rollers are all driven. The feed rollers are fluted. This machine is not surpassed for strength, durability and utility. Driving pulley eighteen inches in diameter, nineteen inch face. Twenty-four inch inserted teeth saws; prefered or solid teeth saws may be used if properly fitted.

The Wm. Hamilton Mfg. 60., Ltd.

PETERBOROUGH.

-- ONT. --

Branch Office: VANCOUVER, B.C.

RITE US FOR FUELER PARTICULARS: - -----