
American No. 2 Self-Feed Rip Saw Table



Opposite Side--May be Belted in Any Direction.

Designed for ripping hard or soft woods up to 25 inches in width and 6 inches thick.

The Arbor is extended so as to carry two or more saws. Extreme distance between saws $6\frac{1}{2}$ inches. By placing the saw against outside collar 31 inches in width can be ripped.


Table, 40 inches wide, by 55½ inches long, provided with two idler rolls and throat plate.

Feed, strong and positive; is adjustable so as to lay close to a 10 inch saw and expands to take in a 20 inch saw.

Our improved self-locking gauge is simple in construction, easy to operate and when set is perfectly rigid.

Workmanship the very best throughout.

Write for full particulars.

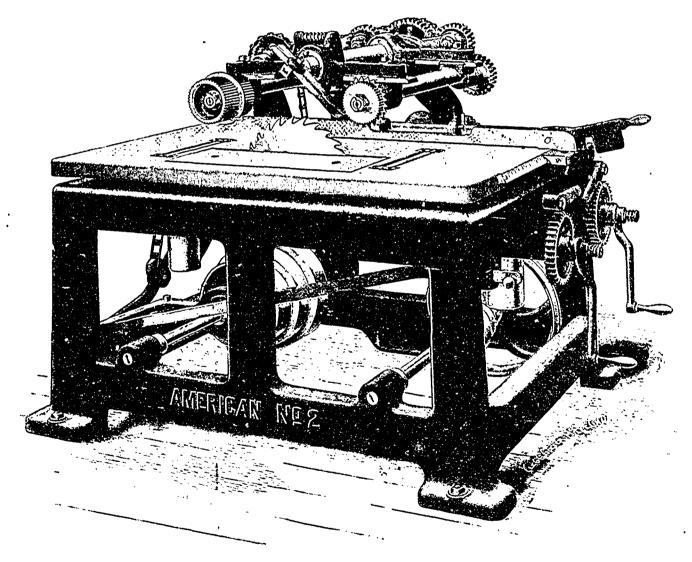

CATALOGUE AND PRICES ON APPLICATION



American Wood Working Machinery 60.

136 Liberty Street, NEW YORK

British Golumbia Agency:

THE FAIRBANKS GO., VANGOUVER

