
No. 69,614. Pocket for Garments. (Poche pour vêtements.)

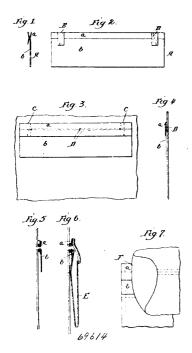

Reinhold Bartell, Philadelphia, Pennsylvania, U.S.A., 6th December, 1900; 6 years. (Filed 26th October, 1900.)

Claim.-1st. The method of forming a reinforced opening for a pocket, consisting in securing a reinforce form in two sections upon the outer face of the garment by lines of stitching F and G which are deflected at their ends toward each other, severing the sections of the reinforce throughout a portion of their length, and at the same time cutting the pocket opening in the garment, turning the reinforce outside in, drawing the goods lengthwise of the pocket opening so as to bring the edges of the inturned portion of the opening together, as specified. 2nd. The method of forming bar takes in pocket openings for strengthing the same without adding material, consisting in folding the goods, stitching the same along the fold, refolding the goods and again stitching along the edge of the second fold, and finally pressing the goods into shape, as the second fold, and finally pressing the goods into shape, as specified. 3rd. In combination with a garment and a pocket opening formed therein, a pocket strip, a facing secured thereto, its edges being inclosed within folds in the pocket strip, a pleat formed in the pocket strip, and an elastic band secured to said plait and the garment in such manner as to relieve the lower edge of the pocket opening from undue strain, as specified. 4th. In a pocket for garments, the herein described reinforcing strip which consists of a folded section of fabric abutted against another folder section of fabric, the fold line of each section facing the fold line of the opposing section, and secured together on such fold line by through and through stitches, as set forth. 5.h. The herein described pocket for garments, the same comprising pocket having an opening with its edges turned back on the inside, reinforce strips sewed to the said edges above and below the pocket opening and means whereby the edges of the pocket opening are normally maintained in contact, substantially as described.


## No. 69,615. Grain Door for Cars.

(Porte à grain pour chars.)


John Robson Taylor, Coteau Landing, Quebec, Canada, 6th December, 1900; 6 years. (Filed 5th November, 1900.)

Claim.—1st. A grain door comprising a main portion and a flap and a vertically movable horizontal cross bar carried by said flap and projecting beyond the sides thereof, and means carried by the and projecting beyond the sides thereof, and means carried by the main portion of the door for engaging said ends of the cross bar when in its lowermest position, substantially as described and for the purpose set forth. 2nd. A grain door comprising a main portion in the form of an open frame, a flap for closing said open frame, a vertically movable horizontal cross bar, a pair of elongated staples for retaining said cross bar movably upon the flap, a pair of elongated main regrition one on each side of said flav. cleats mounted upon said main portion one on each side of said flap, substantially as described, and for the purpose set forth. 3rd. A grain door comprising a main portion in the form of an open frame,

to receive the lower end of said bolt, substantially as described, a d for the purpose set forth. 4th. The combination with a grain door

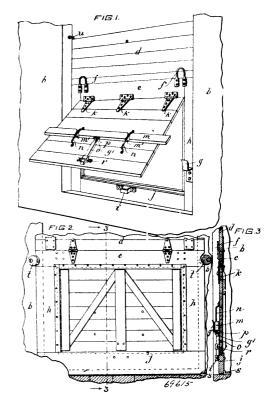

for cars of a pair of eccentrics carried by the car body one on each side of the grain door, substantially as described, and for the purpose set forth. 5th. The combination with a grain door for cars of a pair of eccentrics carried by the car body one on each side of the grain door, and a pair of corner plates, substantially as described and for the purpose set forth.



George Damon Beldin, Marengo, Illinois, U.S.A., 6th December, 1900; 6 years. (Filed 15th November, 1900.)

Claim.-1st. A curry comb provided with a plurality of knife blades having sharp cutting edges to cut and liberate the tangled hair from between the toothed plates, said plates being relatively movable thereto, substantially as and for the purpose set forth. 2nd. A curry comb having a plurality of toothed plates and a plurality of parallel knife blades having sharp cutting edges to cut and always the total delay from hydroger that grain door comprising a main portion in the form of an open frame, a flap for closing said open frame, a vertically movable horizontal ality of parallel knife blades having sharp cutting edges to cut and cross bar, a pair of closes the flap, a pair of clears mounted upon said main portion one on each side of said flap, a vertical bolt connected to and movable with said cross bar, and a strap upon the main door portion frame, a plurality of knife blades connected thereto, suitable toothed