

SUPERSEDED EDITION

NATIONAL TOPOGRAPHIC SERIES 1:50,000

NOB LAKE

FIRST EDITION

SHEET 23 1/15 WEST HALF



CANADA  
DEPARTMENT OF  
MINES AND TECHNICAL SURVEYS  
SURVEYS AND MAPPING BRANCH

REFERENCE

Roads:	
loose surface, all weather	less than 2 lanes
loose surface, dry weather	
Tractor Route, Snow or Winter Road	
Trail or Portage	
Railway, under construction	
Bridges, road, railway	
Triangulation Station	
Boundary Mon; Survey Mon	
Spot Elevation, (in feet)	782
Building	
Mill or Factory, small, Sawmill, etc.	SM
Tank, Gas, Oil or Water	Oil
Church; Cemetery	
School; Post Office	S P
Seaplane Anchorage	
Mine or Open Cut	
Quarry	
Sand Dunes	
Lake, or Slough	
Lake or Shoreline, indefinite	
Stream, intermittent or dry	
Stream, indefinite	
Marsh or Swamp	
Inundated Land	
Falls; Rapids	
Foreshore Flats	
Bluff, Cliff or Escarpment	
Wharf or Pier	
Contours:	
elevation	
depression	
approximate	
Wooded Area	

55° 00'	67° 30'	23 0/3	23 0/2	55° 00'
BOUNDARY LAKE	TAIT LAKE	WILLBOR LAKE		
23 2/14	23 2/15	23 2/16		
ELROSS LAKE	NOB LAKE	HOLLINGER LAKE		
23 2/11	23 2/10	23 2/9		
STANT LAKE	CAVERS LAKE			
54° 45'	67° 30'		66° 45'	

INDEX TO ADJOINING SHEETS


MAGNETIC DECLINATION 32° 21' WEST,  
AT CENTRE OF SHEET 1951.  
Annual magnetic change 4' easterly.

NOB LAKE  
QUEBEC AND  
NEWFOUNDLAND  
23 1/15 WEST HALF  
FIRST EDITION

SUPERSEDED EDITION



Surveyed by the Topographical Survey in 1949. Compiled by the Topographical Survey in 1950 from air photographs taken in 1948 by the R.C.A.F.  
The "Quebec-Newfoundland" Boundary has not been established at date of publication.  
Lithographed and printed by the Army Survey Est., R.C.E., Department of National Defence, 1953.  
Copies may be obtained from the Map Distribution Office, Dept. of Mines and Technical Surveys, Ottawa. Price 25 cents.

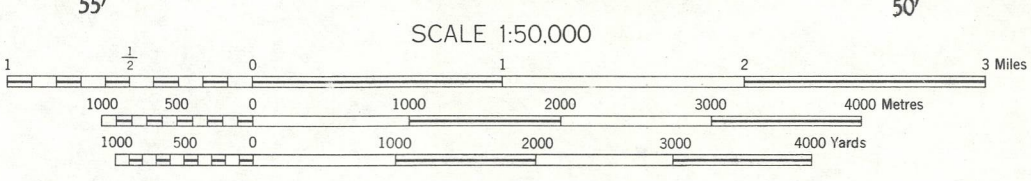

Elevations, in feet, based on Geodetic Vertical  
Angulation referred to sea level.

CONTOUR INTERVAL 50 FEET

