
S	do	10 x 12	50	60	55	25
T	do	11 x 14	62	70		
U	do	14 x 17				
V	do	17 x 20	80	60	92	00
W	do	20 x 24	101	20	 105	80

There can be but little double that the above will soon supersede all others for viewing purposes, on account of its lessened weight and greater compactness. The bellows is conical in shape. The bed of the camera is folding, and is provided with a focusing screw. The double swing-back is composed of Nelson Wright's Patent Metallic Support for the vertical swing, and the thumb-screws, which fasten the camera-box to the bed, form the second or lateral swing.

In front, below the apertures for lenses, is a small recess or closet, in which extra tubes, flanges, screws, screw driver, awls, or other small articles may be safely carried. An important feature is the decreased bulk, so that it can be packed in small compass.

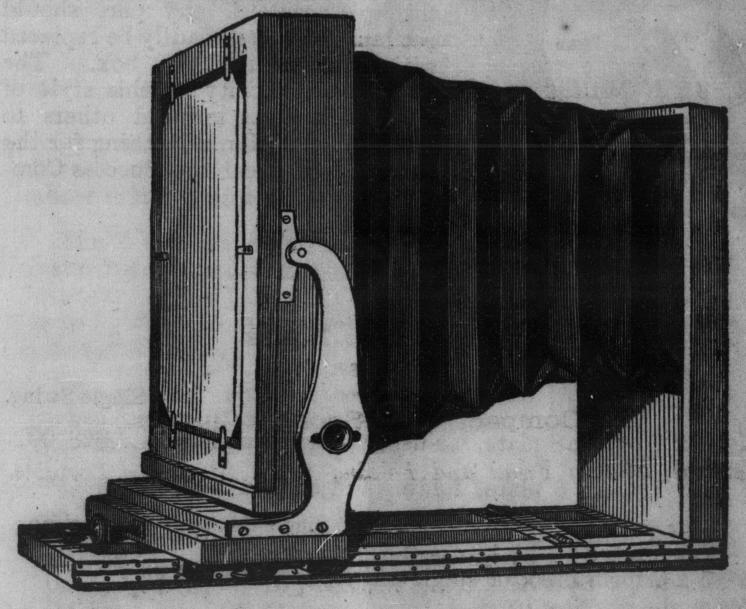

THE COMPACT VIEW SUCCESS CAMERA. SIDE AND REAR VIEW.