

In single deck ships of ordinary form, where H does not exceed 18 feet, the frame modulus determined by the preceding method is multiplied by the factor f_3 where

$$f_3 = .50 + .05 (H - 8).$$

Where the horizontal distance from the outside of the frame to the centre of the first row of pillars exceeds 20 feet, the Assigning Authority is to be satisfied that sufficient additional strength is provided.

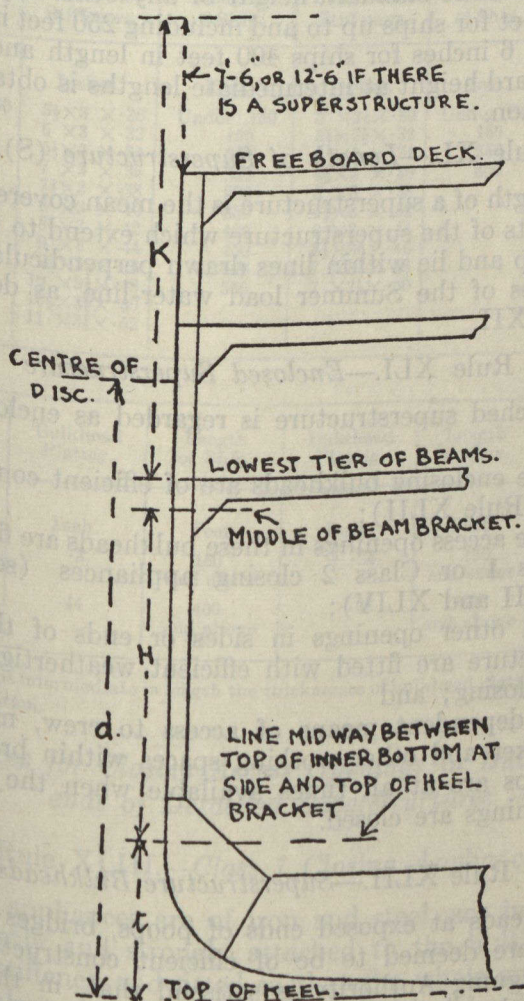


FIGURE 2

Superstructures

Rule XXXVIII.—Height of Superstructure

The height of a superstructure is the least vertical height measured from the top of the superstructure deck to the