

Fig. 17.

CONSTRUCTION F.H. 20:—This construction with slight modifications may be used on curtains of all sizes, from the smallest to the largest. The door is placed on the face of the wall and counterbalanced with helical springs and operation is effected by means of reduction gearing and chain hoist.

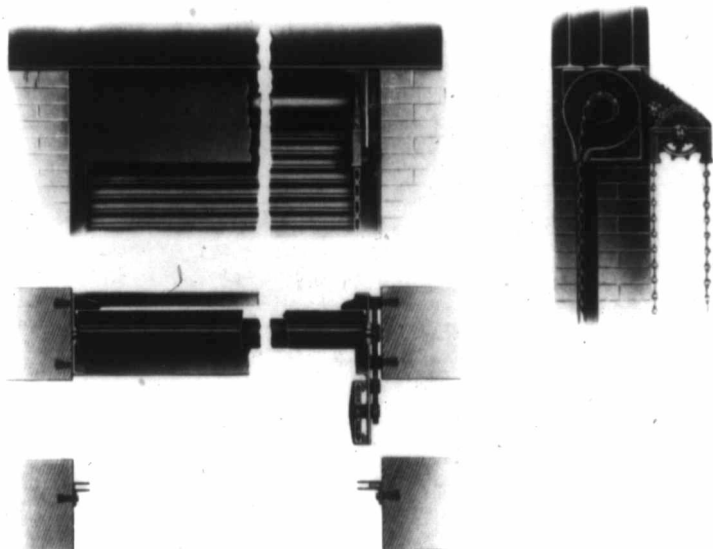


Fig. 18.

CONSTRUCTION B.H. 20:—This construction shows the application of the chain hoist to doors placed between jambs. Brackets and grooves are fastened to the jambs and the chain hoist extends out from the opening. On account of necessary gearing one groove extends further into the opening than the other as shown in the cross sectional view. Coil is covered by a galvanized iron hood.