

QUALITY  
TELLS

QUALITY  
TELLS

# Cream Separator Facts


## Talk No. 4

These talks have already dealt with Simplicity of Construction, Speed and Cleanliness, all which increase the durability of the "Melotte."

# DURABILITY

We have shown the extreme Simplicity of Construction which characterizes the "Melotte" Cream Separator." This simplicity not only means that there are fewer parts but that these parts are arranged in such a manner as to present the smallest possible surface to friction. Owing to the gear spindles being upright the entire weight of the bearing falls on the end of the spindle which turns on a ball-bearing immersed in oil. There is thus only a single point of contact, this point of contact being between the toughened end of the spindle and the hardened steel ball-bearing. It is therefore not surprising to find that the separator trials held under the auspices of The Royal Agricultural Society of England at Maidstone in 1898, and again at the trials held under the auspices of the Agricultural Societies of the North of France at Boulogne last October, the "Melotte" should be ahead of all competitors in skimming and ease of turning. That we have never yet had occasion to replace a worn bearing, although the "Melotte" has been selling in Canada for the last eight years is another evidence of the small amount of friction and consequently greater durability of the Melotte Cream Separator. This perfection of construction combined with the high quality and perfect finish of parts is of vital importance in reducing the repairs bill,

lengthening the life of the machine and ensuring smooth running and therefore clean skimming long after competing machines have been consigned to scrap heap. Our next talk will deal with the skimming qualities of the Melotte Cream Separator. Write for a Melotte Booklet. It will save you money.

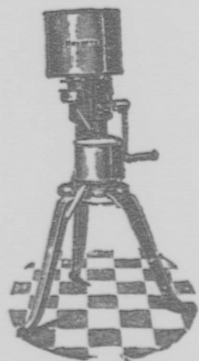


Melotte sizes A, B, C, D.  
Capacity  
280 lbs. to 600 lbs.

**R. A. LISTER  
& CO. LIMITED**

579 @ 581 St. Paul Street

**MONTREAL**

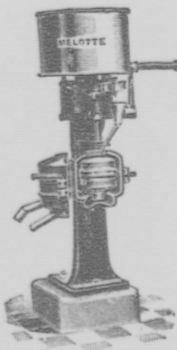

Melotte sizes 1 to 6.  
Capacity  
400 to 1,300 lbs.