

HAMILTON, CANADA

Wire Reinforcing.—Continued.

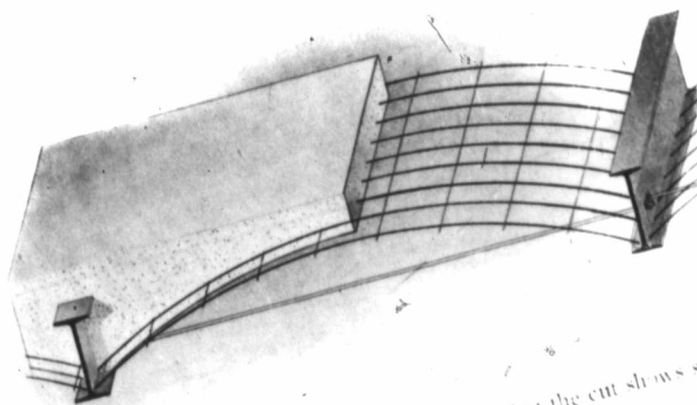


Figure 5 is the same as No. 4, excepting that the cut shows stiffening rods to brace the I beams.

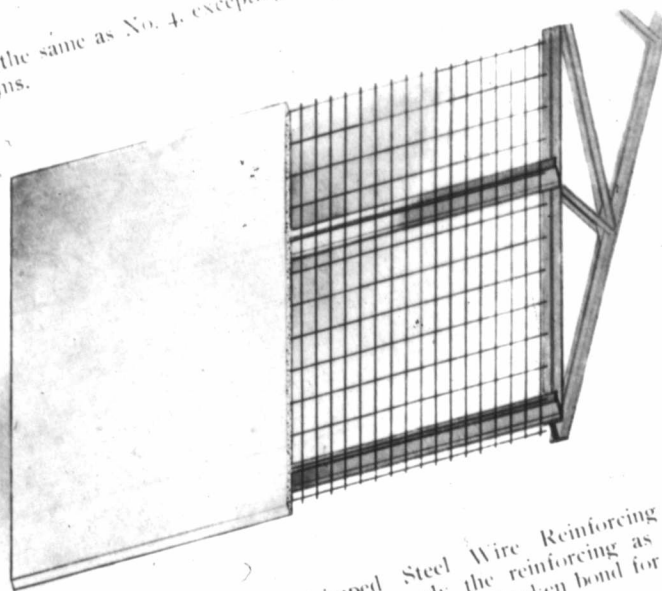


Figure 6 illustrates our Crimped Steel Wire Reinforcing applied to pitched roofs. For this purpose we can supply the reinforcing as wide as 10 feet and in any desired lengths, thus insuring an unbroken bond for hundreds of feet. For Table of Breaking Strains, etc., see page 160.