

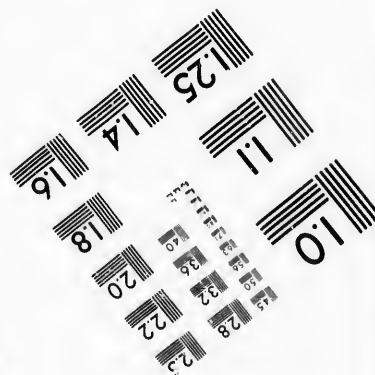



**IMAGE EVALUATION
TEST TARGET (MT-3)**



**Photographic
Sciences
Corporation**

23 WEST MAIN STREET
WEBSTER, N.Y. 14580
(716) 872-4503

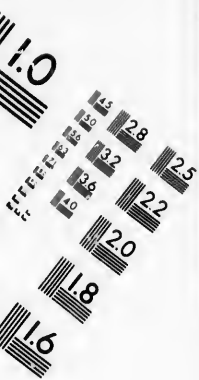

**CIHM/ICMH
Microfiche
Series.**

**CIHM/ICMH
Collection de
microfiches.**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques



© 1986

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- Coloured covers/
Couverture de couleur
- Covers damaged/
Couverture endommagée
- Covers restored and/or laminated/
Couverture restaurée et/ou pelliculée
- Cover title missing/
Le titre de couverture manque
- Coloured maps/
Cartes géographiques en couleur
- Coloured ink (i.e. other than blue or black)/
Encre de couleur (i.e. autre que bleue ou noire)
- Coloured plates and/or illustrations/
Planches et/ou illustrations en couleur
- Bound with other material/
Relié avec d'autres documents
- Tight binding may cause shadows or distortion along interior margin/
La reliure serrée peut causer de l'ombre ou de la distorsion le long de la marge intérieure
- Blank leaves added during restoration may appear within the text. Whenever possible, these have been omitted from filming/
Il se peut que certaines pages blanches ajoutées lors d'une restauration apparaissent dans le texte, mais, lorsque cela était possible, ces pages n'ont pas été filmées.
- Additional comments:/
Commentaires supplémentaires:
- Coloured pages/
Pages de couleur
- Pages damaged/
Pages endommagées
- Pages restored and/or laminated/
Pages restaurées et/ou pelliculées
- Pages discoloured, stained or foxed/
Pages décolorées, tachetées ou piquées
- Pages detached/
Pages détachées
- Showthrough/
Transparence
- Quality of print varies/
Qualité inégale de l'impression
- Includes supplementary material/
Comprend du matériel supplémentaire
- Only edition available/
Seule édition disponible
- Pages wholly or partially obscured by errata slips, tissues, etc., have been refilmed to ensure the best possible image/
Les pages totalement ou partiellement obscurcies par un feuillet d'errata, une pelure, etc., ont été filmées à nouveau de façon à obtenir la meilleure image possible.

This item is filmed at the reduction ratio checked below/
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	14X	18X	22X	26X	30X
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12X	16X	20X	24X	28X	32X
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

The copy filmed here has been reproduced thanks to the generosity of:



Library of the Public
Archives of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol \rightarrow (meaning "CONTINUED"), or the symbol ∇ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

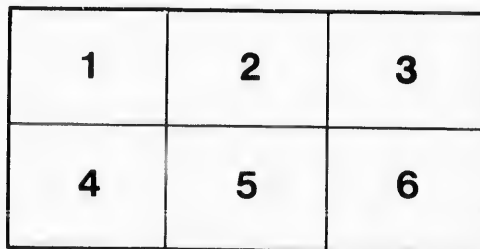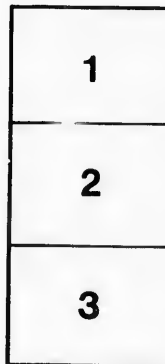

L'exemplaire filmé fut reproduit grâce à la générosité de:

La bibliothèque des Archives
publiques du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole \rightarrow signifie "A SUIVRE", le symbole ∇ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

ADVANCE PROOF—(Subject to revision).

This Proof is sent to you for discussion only, and on the express understanding that it is not to be used for any other purpose whatsoever.—(See Sec 39 of the Constitution)

Canadian Society of Civil Engineers.

ESTABLISHED 1887.

To be read in November.

TRANSACTIONS.

N.B.—This Society, as a body, does not hold itself responsible for the facts and opinion stated in any of its publications.

Paper 8.

THE TELEPHONE.

(By F. N. GIBBORNE, M. Can. Soc. C. E., F.R.S.C., &c., &c.)

Many and bitter have been the writings and discussions as to the *Original Inventor* of the Telephone.

The earliest record, vide copy of the "Jahresbericht," of 1861, in the British Museum, proves that Philip Reis, of Berlin, had then experimented, with the avowed object of *transmitting speech* by electricity, and that musical sounds had been conveyed by his apparatus. Moreover, his original instruments now reproduce speech, when the electrodes are moistened with a drop of water, or oil.

Fifteen years later, 1876, Professor Elisha Gray, while endeavoring to *transmit speech*, invented his *harmonic telegraph*; and Graham Bell, who was in search of a *harmonic telegraph* (vide his original United States Patent of 1876), discovered the simple and beautiful method of *transmitting speech*, which has since bestowed upon him fame and fortune.

Two years later, 1878, Professor Hughes gratuitously gave to science and the world, his microphone; and based upon such discovery, viz., the varying resistance of carbon electrodes under more or less pressure, Thomas A. Edison invented and improved telephonic transmitters; and now the combined inventions of Bell, Edison, Gower, Blake and others constitute the commercial value of those Bell Telephone Company's acquired patents which have been upheld by the law courts of the United States and Europe with such liberality of scope as greatly to astonish the scientists of the world.

Innumerable attempts have consequently been made to transmit speech *without infringing* upon original patents, and to such efforts are we, in great measure, indebted for the researches of and results obtained by electricians of note; for although admirably effective under favorable environment, the telephone is still susceptible of material improvement, and already we have mathematically correct formulae and laws as a guide for experimenters in the practical transmission of sound waves by electrical impulses.

The diverse theories advanced by prominent electricians, at a late meeting of the Society of Telegraph Engineers and Electricians, London, is my apology for preparing the present paper for discussion, and I may at once state, that the following requirements are *essential* to the satisfactory transmission of speech.

- 1st. That articulation shall be clear and natural in tone.
- 2nd. That the apparatus shall be free from inductive or extraneous sounds.
- 3rd. That increased electrical energy for long-distance transmission of speech and loudness of sound is desirable.
- 4th. That a material reduction in the number of wires or circuits, at present required for a Telephonic Exchange, is the essential element for economy of maintenance.

At the meeting already referred to, Professor Sylvanus Thompson stated:—That all diaphragms and springs have distinctive tones, and those of low fundamental pitch impart a *boomy* sound in reproduced speech, while higher keyed ones, yield a *metallic* or *tinny* sound.

That the transmission of electric impulses from sound waves are not dependent upon the varying resistances of the electrodes under pressure; but are occasioned by the millions of minute electrical discharges between the molecules which fly to and fro, between the adjustable electrodes, from higher to lower potential, as they approach or recede under the varying forces of sound waves; and that the effectiveness of transmitters was improved, as their electrodes rise in temperature, either by applied heat or from the passing of the electric currents.

This statement was in part endorsed by Mr. Stroh (formerly assistant to Sir Chas. Wheatstone), who remarked, that he did not believe in the effectiveness of *applied heat*; but that when the current first passes through the electrodes, their minute points offer so much resistance, that heat is produced and they burn off, so that the surface contacts become larger and the instruments convey speech; but when too

large, silence ensues;—that when properly adjusted, a rapid bombardment of movable atoms between the electrodes occur, very quickly from the positive and more slowly from the negative poles. And he instanced the following curious experiment, under microscopic observation, that when a drop of oil was placed between two platinum pointed electrodes and a current passed through them, a great disturbance took place between the particles of oil, which rotated between the points with wonderful rapidity, one point becoming hotter than the other, as in the electric arc light, although reversing the polarity did not invariably reverse their heat.

Professor Sylvanus Thompson stated that the snap sounds heard in telephones, which are generally attributed to make and break contacts, are really due to sparks between the electrodes, and that when such sparks are suppressed the noises cease and that they can be almost entirely eliminated (even when very strong currents are used) by introducing double differentially wound electro magnet into the circuit.

In this connection Mr. Stroh observed that when new carbons are used, at their first contact, they click and then vibrate, with such rapidity as sometimes to produce musical sounds, which cease as the spring or weight pressure is increased, and until vibrations are again started by sound waves. And that if a watch were placed upon a microphone, all kinds and qualities of sound could be obtained by manipulating the points, thus clearly proving that it is not the tick of the watch which is heard, but the microphones own sounds, started by the tick of the watch; and that from such fact it would appear that the mechanical movements due to sound waves have the effect of governing and controlling the frequency, amplitude, and form of the vibrations which the microphone sets up through every disturbance of its equilibrium.

Professor Thompson further stated that by using a differentially wound induction coil in the transmitter, not only is attention greatly improved, but the vibratory induction disturbances, from approximate running machinery, are innocuous even to a sensitive Blake transmitter, and that two small induction coils, having their primary wires united in parallel and their secondaries in series, gave a much more satisfactory result than is obtainable from the ordinary coil in present use.

That granulated hardened coke, as used in the Humming's transmitter, presents more numerous points of contact than two solid electrodes, and hence the greater vibratory effect produced in a distant receiver; but that comparative tests between metallic alloys, demonstrate, that a platinum point, resting upon an electrode of copper, treated either with a mixture of selenium and sulphur, or with tellurium, reproduces speech with a clearness of articulation far superior to anything obtainable from hard carbon, although such alloy requires a greater initial pressure, at the electrodes, than is required by carbon.

For many practical reasons, I consider this latter statement of Professor Thompson's an important one.

Professor Thompson then exhibited a transmitter, designed with the object of dispensing with the patented diaphragm. At the small end of a speaking tube, a ball or valve of metal rested upon three metallic points and the sound waves suspended, or in part relieved, the weight of the ball; but Professor Hughes observed, that if the tube was plugged below the valve and the air allowed to escape through side holes, the instrument remained equally effective, thus proving that the tube itself became a diaphragm of different form, and that under any circumstances, for well known mechanical reasons, the practical limitation of three points of support would render the instrument less powerful than many others in use.

The experimental transmitter just described will serve in great measure to explain the broad claim allowed at law in favor of the diaphragm, as patented by Professor Bell.

It appears, however, that a simple grid of small carbon bars, suspended upon a platinum wire, within a more vibrating leaden frame, and acted upon direct by sound waves, proves to be an effective transmitter, and by such device a diaphragm may be totally dispensed with.

Professor Hughes stated that if a series of small bars or pencils of carbon were attached to the inside rim of a bowl, or box, filled with water in order to eliminate the hollow tones of such receptacle, such a transmitter would operate with increased power, because every portion of the water would then be in a state of tremor from the sound waves.

This remarkable power of water for conveying sounds has already been utilized for discovering leaks in water pipes; even the leakage of a few drops may be localized by the application of a delicately constructed telephonic receiver; and I have little doubt but that under favorable circumstances distinct signals can be telephonically conveyed through several miles of water.

Magneto electric transmitters have, since the introduction of the microphone, been superseded by local circuit battery power transmitters; but I am of opinion from practical experiments made with the "Giborne & Keeley" patented telephone, purchased by the Bell Telephone Co. of Canada, that it is desirable, if possible, to dispense with the always uncertain and varying action of introduced galvanic battery power.

Professor Thompson suggested a transmitter based upon the principle of a dynamo-electric machine; but the advantages of such mode of increasing the power of the currents would be more than counterbalanced by the increased inertia consequent upon the to and fro movement of the armature.

In concluding his observations at the meeting to which I have reference, Professor Thompson stated that in his opinion the progress of long

distance transmission of speech would depend upon increasing the power of the transmitter, and reducing the sensitiveness of receivers to induced sounds from extraneous disturbances.

To such general conclusion Mr. W. H. Preece (electrician to the London Post Office and telegraphs,) took exception, and stated that clearness of articulation and long distance telephony depended entirely upon the line wires being freed from electro-static and electro-magnetic induction, and that when the environment was favorable, the most ordinary form of instruments would convey speech as well over long as over short circuits. That the law, which determines the transmission of currents through a wire, to produce speech, is precisely the same, in every respect, as the law which determines the flow of currents through submarine cables, and that it is absolutely impossible, to obtain any greater number of signals, along a given conductor, by any alteration or improvement in the instruments.

That the ratio values of conductors were as follows: iron 1,000, copper in cables 1,200, copper exposed 1,500. That the difference between iron and copper was due to the self induction of the iron; and between copper in cables and copper exposed, the difference was entirely due to the insulation of the former; the leakage from suspended wire enabling it to discharge its static charge, and still more quickly from a suspended copper than from an iron wire.

That experiments showed, that when the speed of the currents was .004 to .003 of a second, the transmission of speech was bad; when .003 to .002, it was fair; when .002 to .001, it was good; and if under .001, perfect.

And that the average number of sonorous vibrations in the human voice, was about 1,500 per second. Experiments made upon the Irish cables and lines proved the relative values of the different circuits, and that even with a powerful "Berliner" transmitter, the rate of speaking was neither increased nor varied from the result obtained when ordinary transmitters of much less power were used.

That Professor Fleming Jenkins had verified the law of static induction and consequent retardation of signals, through the French Atlantic cable of 2500 miles in length, when he found it possible to obtain $\frac{1}{2}$ reversals of current, per second; and that both theory and practice demonstrated that speech was limited in such class of cable to a distance of not exceeding 96 to 100 miles of its length.

That telephonic disturbances are principally due to secondary currents induced by primary currents in neighboring lines, and that short circuits are more disturbed by such influences than are long circuits, such disturbances being due, not merely to the strength or potential of neighboring currents, but to the rate at which said currents rise and fall.

That although the effects of induction might in some measure be neutralized by strengthening the transmitter and weakening the receiver, it would be almost impossible to convey intelligible speech, when very strong currents (such for instance as were used in a Wheatstone transmitting telegraph) were traversing neighboring lines, the induction effects from said currents being 100,000 times stronger than telephonic currents.

Professor Hughes was of opinion that greater attention should be given to the transmitter induction coils, and that the battery cells and primary wire of the coils should be in proportion to the internal resistance of the transmitter; and he agreed with Professor Thompson, that more powerful transmitters and less sensitive receivers indicated the path of progress in telephony.

Professor Bidwell held, that the constituent elements of a transmitter should be an arrangement in multiple-arc of heavy carbon pencils, with light points of contact, that the resistance of such a microphone should be proportionately as small as the rest of the circuit, and that the current should be as strong as the number of contacts and amount of pressure would warrant.

With due regard to the foregoing views and experiments of eminent electricians, I venture to express my opinion.

That clearness of articulation and natural tones are best obtainable from magneto-electric transmitters, which are free from the disturbing and varying action of local galvanic cells.

That loudness, and progress in long-distance telephony, will depend in great measure upon increased power in the transmitter and decreased sensitiveness in the receiver.

That whereas it is impracticable to control the environments of telephone wires, attention must be given to the elimination of induced disturbing currents, by utilizing twisted all-metallic circuits, or some equivalent device.

That economy in line construction can be effected by utilizing one such twisted all-metallic circuit, of low resistance, for several exchange connections.

In conclusion of this paper, which has been compiled with the sole object of inviting discussion upon one of the most important inventions of the nineteenth century, I may add that after my return from England I hope to be able to give some further items of interest (and notably that make and break currents are not detrimental to the transmission of speech), for the consideration of the members and associates of the Canadian Society of Civil Engineers.

F. N. GISBORNE.

OTTAWA, July 1st, 1887.

