


IMAGE EVALUATION TEST TARGET (MT-3)

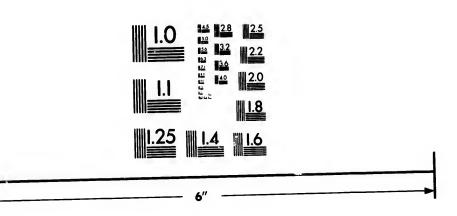

Photographic Sciences Corporation

23 WEST MAIN STREET WEBSTER, N.Y. 14580 (715) 372-4503

STATE OF THE STATE

CIHM/ICMH Microfiche Series. CIHM/ICMH Collection de microfiches.



Canadian Institute for Historical Microreproductions / Institut canadian de microreproductions historiques



(C) 1984

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The to

The pos

Or

the sic oti fire sic or

Th sh Til wi

Ma dif en be rig rea

origi copy which repro	Institute has attemp nal copy available for which may be biblich th may alter any of to oduction, or which no usual method of film	r filming. Fea ographically he images in nay significal	atures of this unique, the atly change	qu'il de c poin une mod	lui a été et exemp t de vue i image rep lification d	icrofilmé lo possible d laire qui so bibliograph produite, o dans la mé ci-dessou	e se proce ont peut-é nique, qui ou qui peu ethode no	urer. Les tre uniqu peuvent ivent exig	détails Jes du modifier Jer une
V	Coloured covers/ Couverture de coul	Bur				d pages/ e couleur			
	Covers damaged/ Couverture endomr	magée				amaged/ ndommage	ies		
	Covers restored and Couverture restaure				_	estored and estaurées e			
	Cover title missing/ Le titre de couvertu					scoloured écolorées,			
	Coloured maps/ Cartes géographiqu	es en couleu	r		_	etached/ étachées			
	Coloured ink (i.e. o Encre de couleur (i.			V	Showthi Transpar				
	Coloured plates and Planches et/ou illus					of print va négale de		ion	
	Bound with other material/ Relié avec d'autres documents			Includes supplementary material/ Comprend du matériel supplémentair					
	Tight binding may along interior marg Lare liure serrée pe distortion le long de Blank leaves added appear within the theve been omitted II se peut que certa lors d'une restaurat mais, lorsque cela e pes été filmées.	in/ ut causer de a la marge in during resto ext. Wheneve from filming ines pages b ion apparaiss	l'ombre ou de la térieure ration may er possible, thes / lanches ajoutées sent dans le text	ee s	Pages w slips, tis- ensure the Les page obscurci- etc., ont	tion availa lition dispo holly or pa sues, etc, he best po is totalemo es par un été filmée a meilleuro	onible artially ob have bee ssible ima ant ou par feuillet d' as à nouve	in refilme age/ rtiellemer errata, ur eau de fa	d to nt ne pelure,
	Additional commen Commentaires supp								
	item is filmed at the ocument est filmé a								
10X	14X		18X	22X	1 1	26X		30X	
	12X	16X			24X		28X		32X

The copy filmed here has been reproduced thanks to the generosity of:

University of British Columbia Library

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated inspression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol → (meaning "CONTINUED"), or the symbol ▼ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

L'exemplaire filmé fut reproduit grâce à la générosité de:

University of British Columbia Library

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la natteté de l'examplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant solt par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le ces: le symbole → signifie "A SUIVRE", le symbole ▼ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents.
Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

1	2	3
---	---	---

1	
2	
3	

1	2	3
4	5	6

ata

ils

ne

age

lifier

lure,

2X

REPORT

OF THE

ENGINEER

TO THE

DIRECTORS

OF THE

WHITE MOUNTAINS RAIL-ROAD, JULY, 1849.

REPORT

OF THE

ENGINEER

TO THE


DIRECTORS

OF THE

WHITE MOUNTAINS RAIL-ROAD,

JOLY, 1849.

HAVERHILL, N. H. PRINTED BY H. W. REDING. 1849.

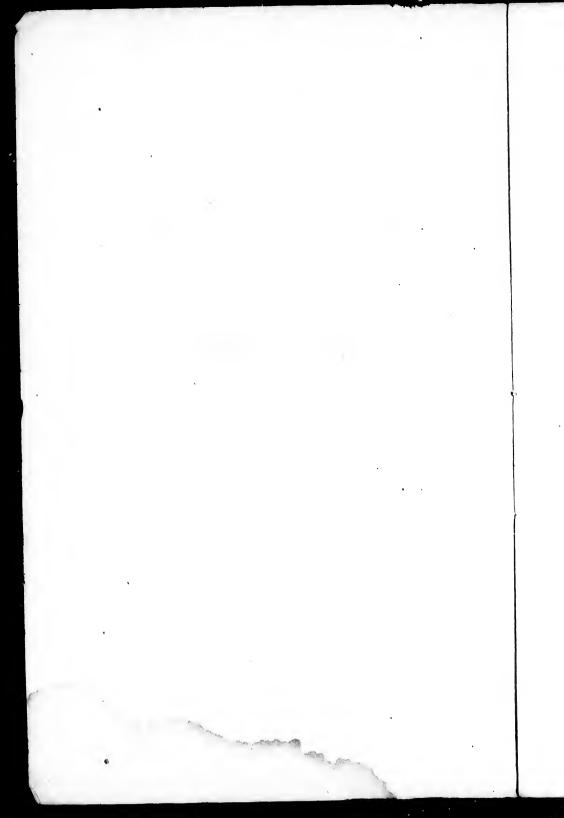

REPORT.

OFFICE OF THE WHITE MOUNTAINS RAIL ROAD, & Bath, July 13, 1849.

To the Directors of the White Mountains Rail Road:

GENTLEMEN: I lay before you Plan and Profile of the route surveyed for the WHITE MOUNTAINS RAIL ROAD; and estimates

of its Construction and Furnishing.

The Line commences at a point on the definitive survey of the Connecticut and Passumpsic Rivers Rail Road in Wells River Village, Newbury, Vt., about one hundred and fifty feet South of Wells River; and crossing that stream, passes Easterly one thousand feet on a curve of about 800 feet radius to the Connecticut River Bluff, and crosses the River 60 feet Northerly of the old Ferry way; thence passes to Woodville in Haverhill, where it meets the Northern terminus of the Preliminary Survey of the route for the Boston, Concord and Montreal Rail Road, a distance of twenty-two hundred and fifty feet from point of be-

ainnina

From this point the Line continues in the immediate valley of the Ammonoosuck, making two crossings of the stream at Harris's bend, passing near his house; and again crossing a short distance below the mouth of Wild Ammonoosuck; and passes near the Westerly end of Bath Village bridge, a distance of four miles from Woodville. Again crosses the river a short distance below the farm-house of Hon. A. Woods; passes Easterly of, and near the house of Z. Newell, Esq.; crosses Mill Creek in Landaff on Westerly side of the Mills; and passes Lisbon Village between Main street and the River, a distance of 9 1-2 miles from Woodville. Thence continues on Easterly bank, passing in rear of Elliots'; crossing Salmonhole Creek near the Mill-dam, and South branch Ammonoosuck near its junction with Main stream, to Littleton Village, a distance of 19 3-4 miles from Woodville.

From this point two routes are surveyed to Clifford's bend in Bethlehem; the Westerly crossing the Ammonoosuck a short distance Northerly of Littleton Village bridge, and continuing on Westerly side of River; the Easterly making two crossings of the stream at Bowman's bend and passing on Easterly bank at Scythe Factory, and again crossing near Clifford's house.—Thence the Line continues on Westerly side of River passing on Easterly side of Alderbrook Mills, and at point of bluff, on Westerly side of Rand's Mills in Bethlehem, to the junction of Wing road with the River road; where it passess from the Ammonoosuck and following up the valley of Pine Log Creek, attains the summit in Whitefield a distance of 27 miles from Woodville.

Thence passes Easterly of Montgomery's Pond, and near Burn's Mills at its outlet; crosses Little River a short distance in rear of the house of J. M. Gove, Esq., and John's River on Westerly side of Starch Factory at Whitefield Village, a distance of 30 2-3 miles from Woodville. Thence continues on Easterly slope of the valley of John's River passing a little Westerly of Capt. Smith's house in Dalton; and keeps in vicinity of common road to Scott's, passing Westerly of his house and Easterly of Taylor's into Lancaster; and approaches the Connecticut River about half a mile Southerly of Benton's and passing on Westerly side of the house and about 500 feet Easterly of the house of Hon. J. M. White, and near school-house; passing over the intervale and crossing Israel's River near Lancaster Village-terminates on Main street near the Churches and Cemetery, at the Southern terminus of the Preliminary Survey of the route for the Lancaster Branch of the Atlantic and St. Lawrence Rail Road, a distance of 41 1-2 miles and 26 feet from its junction with Line of Boston, Concord and Montreal Rail Road in Woodville; and 41 3-4 miles and 956 feet from its point of starting on Linc of the Connecticut and Passumpsic Rivers Rail Road.

Examination was made for a more direct route leaving the immediate valley of the Ammonosuck, from Littleton Village to "Wing Road" in Bethlehem, but without success. Also to leave at Alderbrook Creek in Bethlehem and pass by Round Pond to valley of John's River, but without discovering a favorable pass from the valley of the Ammonosuck to the Pond.

The route is favorable for the construction of a Rail Road. Except at very few points as the Profile shows, the work will be regarded as very light. But little Rock cutting, and very few slide cuts will be encountered. At but three or four points, does

the Line run so near the River, as to require protection for the embankment. The Bridge sites are quite favorable; the abutments in many instances, as at the crossing of the Connecticut, to be placed on rock above the reach of high water; and in no case will there be an expensive abutment or arch foundation.

As to Curvature the route will compare favorably with New England Rail Roads. In but few instances will there be necessity of adopting curves of shorter radius than 1273 feet. In a

very few cases curves of 1000 feet radius will be used.

The summary of Grades stands thus:

n ;n

e

ıе

ıd

t-

n-

es

ry

ic

26

n-

et

.S-

n-

to

to

nd or-

id. be ew es

4,20	miles of	44,88	feet	the	mile
3,75	"	42,24	66		"
4,50	"	36,96	"		66
1.83	6.6	31,68	"		6 6
4,50	66	26,40			"
5,25	4.6	21,12	"		"
5,00		5 to 19	,0"		"
12,90	"	Level		ide.	

The Level of surface of water in the Connecticut River at Wells River Bridge was assumed as Base. It will be seen that the Whitefield Summit is 650 feet above base, and the Terminus at Lancaster 453 feet. The maximum Grade occurs on both sides of the Summit. The Bridges will be eight in number—the Connecticut, five across the Ammonoosuck, the South branch, and Israel's River. Arches will be put in at Little and John's Rivers. If the Easterly Line from Littleton village to Clifford's is taken, the Ammonoosuck will be turned at Bowman's bend. Passing around Harris's bend in Bath and thereby increasing the length of Line about one-fourth of a mile, will reduce the number of bridges to six.

At Wells River, an additional length of the Arch for the Passumpsic Rail Road is estimated.

In the estimate a width of 15 feet road-bed is assumed for Embankments, and 20 feet for Excavations. Slopes 1,5 horizontal to 1 vertical.

The assumed weight of Rail is 52 lbs. the yard. Sleepers, 6 by 7 inches, 8 feet in length; 7 in number to one length of 18 feet Rail. Chairs 12 lbs. each.

ESTIMATE FROM PASSUMPSIC LINE TO WOODVILLE, DISTANCE, 2350 FEET.

22,400 yds. Earth, at 18 cts., - 450 " Rock, at \$1,00, -	-	-	•	-	-	\$4,032
Wells River Bridge,	-	-	-	-	-	2,500
1,250 yds. Conn. Br. Mas. at \$5,	-	-	-	-	- .	6,250
Bridge 360 feet at \$40,	-	•?	-	-	-	14,400
					•	\$27,632

WOODVILLE TO LITTLETON, DISTANCE 19,75 MILES.

395,600 yds	. Earth at 16 cts.,	\$63,296
7,900 ''	Rock "\$1,00,	- 7,900
1,800 "	Slope Wall at \$1,00,	1,800
2,970 "	Culvert Mas. at \$2,00,	5,940
3,300 "	Bridge, " \$3,50,	11.550
5 Bri	idges, 700 feet at \$18	12,600
		\$103,086

LITTLETON TO LANCASTER, DISTANCE 21,75 MILES, 26 FEET.

598,700 yds.	. Earth, at 16 cts.,	\$95,792
	Rock, "\$1,00,	
1,300 "	Slope Wall, at \$1,00,	1,300
	Culvert Mas. at \$2,00,	
	Bridge, "\$3,50,	
	dges 250 feet at \$17,	- 4,250

\$136,032

FOR ONE MILE SUPERSTRUCTURE.

or one stand bot middle of old,
82,5 Tons Iron at \$50, \$4,125,00 2054 Sleepers, at 15 cts., 308,10 7041 lbs. Chairs, at 3,5 cts., 246,44 4693 "Spikes" " 164,26 Laying Track, 400,00
2054 Sleepers, at 15 cts 308 10
7041 lbs. Chairs. at 3.5 cts 246 44
4693 " Snikes " " " 164 96
Laving Track
Daying Track, 400,00
\$5, <mark>243,80</mark>
41,93 miles, \$219,872,53 Turnouts and Incidental, 19,105,47
Turnouts and Incidental 19 105 47
Total for Superstructure, \$238,973,00
Land damage, \$30,000
Land damage, \$30,000 Fencing, 18,750
Total Land and Fence, \$48,750
·
FURNITURE.
5 Locomotives at \$7500, 37,500 5 Passenger Cars, 10,000 Freight, Platform and other Cars, 40,000 Depots, Water Stations, &c., 61,000
5 Passenger Care 10 000
Freight Platform and other Core 40.000
Donote Water Stations for
Depois, water stations, &c., 01,000
Amounting to \$148,500
SUMMARY.
Grading
Masonry 50.530
Bridges 31 250
Superstructure - 938 078
Land and Fonce
Furniture 140,700
Engineering and Incidental
Grading,
\$727,978
Respectfully submitted,
J. L. GREGG, Engineer.

