

**CIHM
Microfiche
Series
(Monographs)**

**ICMH
Collection de
microfiches
(monographies)**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

© 1997

Technical and Bibliographic Notes / Notes techniques et bibliographiques

The institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming are checked below.

- ☐ Coloured covers / Couverture de couleur
- ☐ Covers damaged / Couverture endommagée
- ☐ Covers restored and/or laminated / Couverture restaurée et/ou pelliculée
- ☐ Cover title missing / Le titre de couverture manque
- ☐ Coloured maps / Cartes géographiques en couleur
- ☐ Coloured ink (i.e. other than blue or black) / Encre de couleur (i.e. autre que bleue ou noire)
- ☐ Coloured plates and/or illustrations / Planches et/ou illustrations en couleur
- ☒ Bound with other material / Relié avec d'autres documents
- ☐ Only edition available / Seule édition disponible
- ☒ Tight binding may cause shadows or distortion along interior margin / La reliure serrée peut causer de l'ombre ou de la distorsion le long de la marge intérieure.
- ☐ Blank leaves added during restorations may appear within the text. Whenever possible, these have been omitted from filming / Il se peut que certaines pages blanches ajoutées lors d'une restauration apparaissent dans le texte, mais, lorsque cela était possible, ces pages n'ont pas été filmées.
- ☐ Additional comments / Commentaires supplémentaires:

L'institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- ☐ Coloured pages / Pages de couleur
- ☐ Pages damaged / Pages endommagées
- ☐ Pages restored and/or laminated / Pages restaurées et/ou pelliculées
- ☒ Pages discoloured, stained or foxed / Pages décolorées, tachetées ou piquées
- ☐ Pages detached / Pages détachées
- ☒ Showthrough / Transparence
- ☐ Quality of print varies / Qualité inégale de l'impression
- ☐ Includes supplementary material / Comprend du matériel supplémentaire
- ☐ Pages wholly or partially obscured by errata slips, tissues, etc., have been refilmed to ensure the best possible image / Les pages totalement ou partiellement obscurcies par un feuillet d'errata, une pelure, etc., ont été filmées à nouveau de façon à obtenir la meilleure image possible.
- ☐ Opposing pages with varying colouration or discolourations are filmed twice to ensure the best possible image / Les pages s'opposant ayant des colorations variables ou des décolorations sont filmées deux fois afin d'obtenir la meilleure image possible.

This item is filmed at the reduction ratio checked below /
Ce document est filmé au taux de réduction indiqué ci-dessous.

10x	12x	14x	16x	18x	20x	22x	24x	26x	28x	30x	32x
							✓				

The copy filmed here has been reproduced thanks to the generosity of:



National Library of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche sheet contain the symbol ➡ (meaning "CONTINUED"), or the symbol ▼ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagram illustrates the method:

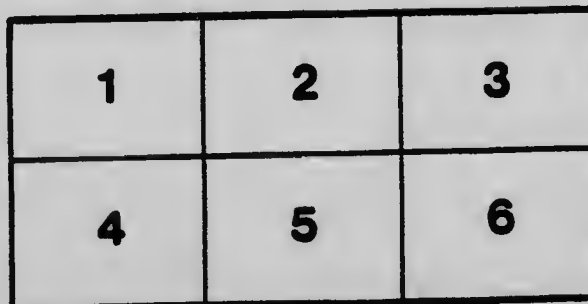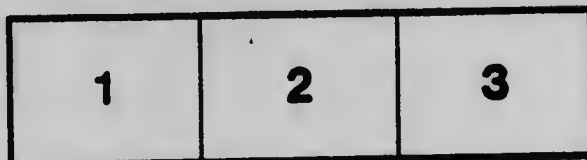

L'exemplaire filmé fut reproduit grâce à la générosité de:


Bibliothèque nationale du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.


Un des symboles suivants apparaît sur la dernière image de chaque microfiche, selon le cas: le symbole ➡ signifie "A SUIVRE", le symbole ▼ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

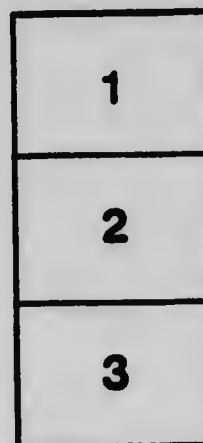

MICROCOPY RESOLUTION TEST CHART

(ANSI and ISO TEST CHART No. 2)



APPLIED IMAGE Inc

1853 East Main Street
Rochester, New York 14609 USA
(716) 482 - 0300 - Phone
(716) 288 - 5989 - Fax

SURVEY

OF

TIDES AND CURRENTS

IN

CANADIAN WATERS

W. BELL DAWSON, C.E.

Engineer in charge.

FIRST REPORT OF PROGRESS, 1894

(Reprinted, 1906.)

OTTAWA
GOVERNMENT PRINTING BUREAU.
1907.

3

SURVEY OF TIDES AND CURRENTS IN CANADIAN WATERS

W. BELL DAWSON, C.E.

Engineer in charge.

FIRST REPORT OF PROGRESS.

OTTAWA, 13th January, 1894.

W. P. ANDERSON, Esq., C.E.,

Chief Engineer, Department of Marine and Fisheries.

SIR,—I have the honour to submit the following report with regard to the Survey of Tides and Currents in Canadian waters.

At the present stage which this work has reached, it may be well to begin by reviewing concisely the representations that have been made during the past years in bringing this matter before the notice of the Government, and the steps that have already been taken.

As long ago as the meeting of the British Association held in Montreal in 1884 the importance of publishing tables for Canadian waters, and the necessity of establishing stations for observations was discussed. The Association adopted a resolution drawing the attention of the Government of the Dominion to the matter and also appointed a committee to collect information and make representations to the Government regarding it. The committee consisted of Dr. A. Johnson, chairman; Professor J. G. MacGregor, of Halifax; J. B. Cherriman, of Toronto; H. T. Bovey, of Montreal; and C. Carpmæl, Director of the Meteorological Service. The Montreal Board of Trade were at the same time considering the question independently, and they concurred in addressing a strong memorial on the subject to the Dominion Government. Ship owners and masters of ships were also practically unanimous as to the pressing need for knowledge on the subject of the tides and currents.

During the following sessions of Parliament, petitions and representations were made through the then Minister of Marine. In reply, this Minister stated that owing to the outlay on the Georgian Bay Survey, and the expedition to Hudson's Bay during the summer of 1885, the Government did not propose to take action in the matter of tidal observations at that time.

In January, 1886, a large deputation representing the British Association, and the Royal Society of Canada, with representatives of the Board of Trade of Montreal, waited on the new Minister of Marine, the Hon. G. E. Foster, and also on the Premier, Sir John Macdonald. The matter was favourably received and fully discussed; and in the official answer it was stated that while the Government was fully sensible of the importance of establishing stations for continuous tidal observations in Canadian waters, it did not propose at that time, owing to the large expenditure on surveys and explorations in other directions, to undertake the additional expense involved; it was, however, fully alive to the importance of the matter, and hoped in the near future to be able to carry out a work so necessary and useful to the commercial interests of the country.

On the return of the Hudson's Bay expedition, a new source of expenditure arose; as the Government undertook to pay half the cost of a re-survey, by the British Admiralty, of part of the Lower St. Lawrence. In the summer of 1887, however, Lieut. Gordon, R.N., who had been in command of the expedition to Hudson's Bay, was authorized to make some test observations at a few points by means of the tide-staff, with a view to ascertaining how far the accepted tidal 'Establishments' were to be relied upon. These observations were taken at Georgetown, P.E.I., at Louisburg, O.B., at Pictou, N.S., and at Port Hawkesbury in the Strait of Canso. In his report on this work, Lieut. Gordon explains that the object of these observations was to show to what extent the means now in the hands of navigators for the prediction of the tides on the coasts of Canada were in error; and he finds the results to show, as far as they go, that the means of prediction are very imperfect, and in some cases (such as the Strait of Canso) actually misleading. While admitting that these observations were too few in number and too rough in their nature to found any conclusions upon, Lieut. Gordon considers that the results certainly strengthen the opinion that the whole question of the determination of tidal constants should be taken up in Canada, and a number of stations established for taking tidal observations; as these would be of the greatest practical value to seamen. He further points out the special value which this work will have when completed, as it will enable an intelligent ship master not only to see at what time the tide will be high or low, but also to see at once how the tidal current is setting his ship, when once the currents are charted for the waters of the Gulf.

As Staff Commander Maxwell, R.N., was at that time carrying on the re-survey in the Lower St. Lawrence, his attention was called to the memorial of the committee of the British Association, and he was asked by the department to state the nature and extent of such tidal observations as he was making. His reply is to the effect that he was doing what he could to observe the tides and currents with the means at his disposal; but that they were confessedly imperfect, and were confined to a limited area, and did not necessarily establish any comparison with any other portion of the river. To do this work in a comprehensive way, he considers the most trustworthy method to be the establishment of self-registering tide gauges at various points in the River and Gulf of St. Lawrence; with one or more vessels from which to observe day by day the condition of the tidal streams under varying states of wind and weather.

Up to the time of the accession to office of Sir C. Hibbert Tupper, K.C.M.G., as Minister of Marine in the autumn of 1888, no steps had been taken to carry out the

work in accordance with the representations made. As Lieut. Gordon had spent the summer of 1888 in navigating the waters of the Gulf of St. Lawrence, he addressed a report to the Minister based upon the further information he there gained, after carefully watching the effects of currents on his ship's course. In this report he expresses the conviction that until we have an exhaustive examination of the whole system of tidal movements, carried out on similar plans to those which have been made on the United States' coasts, and on the coasts of Great Britain, we shall always be subject to an annual amount of marine loss due to the lack of information in regard to tidal currents. He also points out that in the 18 years from 1870 to 1887, the aggregate loss was a little over 80 million dollars, or an average of \$2,782,000 per annum; and in the same period the loss of life had been 4,208 lives. A certain proportion of this loss of life and property is undoubtedly due to imperfect knowledge of the currents; and if the number of narrow escapes of vessels from disaster or wreck were known, it would add a powerful argument in favour of proceeding with the work forthwith. He also adds that if we could only get a record of the narrow escapes, the delays, and the errors of position discovered when a fog clears away, no further argument would be required; but captains of vessels as a rule dislike to admit that they have been out of position; and dangers escaped are only remembered in a practical sense by giving the ship a little more offing the next voyage, when, if the weather is thick, it may be found that the ship is as far to the north as she was on the previous trip to the south. It is the more difficult under these circumstances to collect evidence on the subject. He is himself convinced, however, of the extreme desirability, if not the absolute necessity of proceeding with this work as soon as possible.

During the summer season of 1889 little was done of a practical character, beyond exploratory trips made by Lieut. Gordon and Mr. Carpmael, with a view to ascertaining the best points for the establishment of tide gauges.

At the conclusion of the re-surveys in the Lower St. Lawrence with this season, the expenses of which were being shared by the Canadian Government and the British Admiralty, the time was regarded as opportune to make further representations as to the pressing need for information about our tides and currents. Accordingly, in September, 1889, a petition was addressed to the Minister of Marine and Fisheries which was drawn up by the committee of the British Association, and the Royal Society of Canada, and was signed by the masters and officers of vessels, to the following effect:—

'We, the undersigned masters and officers of vessels engaged in the navigation of the Gulf of St. Lawrence and of the waters on the Atlantic coast of the Dominion of Canada and of Newfoundland, desire earnestly and respectfully to petition the Government and Parliament of Canada, that they would promptly take such steps as they may deem advisable to obtain as thorough a knowledge as possible of the currents in these waters, whether due to the tides or to any other cause, and to distribute amongst mariners the information obtained. We believe that the serious loss of life and property due to shipwrecks attributable to unknown currents during fogs or hazy weather may thus be greatly diminished. In such weather these currents are a cause of great anxiety and danger.'

A further memorial was presented to the Minister by the Shipping Interest of Montreal, bearing the representative signatures of Messrs. H. and A. Allan, David Telfrance & Co., H. E. Murray, Anderson McKenzie & Co., and F. W. Hemshaw. This memorial points out the special deficiency in Canada of such information to mariners as is supplied by the Imperial Government in the British Tide Tables; which show not only the change in the depth of water due to rise and fall of the tide, but also supply very full information about the currents in the waters surrounding the British Islands, whether due to the action of the tides, or influenced by atmospheric causes. The annual wreck list is referred to, as showing the urgent need of similar information for Canadian waters; and as far as ascertained, ship-masters were unanimous in their anxious desire for information on the subject. The need of taking immediate action in the matter is urged, as the necessary observations will occupy some years, and every year before their completion will show its list of preventable wrecks.

This memorial was also heartily endorsed by the President of the Quebec Board of Trade. It was referred to Captain W. H. Smith, R.N.R., Chairman of the Board of Examiners of Masters and Mates, who has had thirty years' experience in the Atlantic service; and in reply he concurs in recommending that self-registering tide gauges be placed at all the prominent ports, and observations taken by competent persons.

About the same time a further communication was received from Dr. Johnson, on behalf of the Committee of the British Association, which reviews the representations already made by them. Amongst other reasons adduced, the rule of the Imperial Board of Trade is referred to. This requires all masters of ships to obtain a certificate of competency, and for this purpose to pass an examination; which examination, in the case of masters desiring a certificate for the coasting trade, includes a knowledge of the tides and tidal currents. The information enabling them to pass this examination is found in the tide tables published by the Admiralty. This is cited to show the need of obtaining data for Canadian waters on which similar information could be based. The recent re-survey of part of the Lower St. Lawrence under Staff Commander Maxwell, is also referred to; and his endeavour as far as time permitted him, to investigate the tides and currents in the part of the river in which he was at work; although he acknowledges his means to be limited and insufficient to establish comparisons with other points. The opinion of Captain Lecky, R.N.R., is also quoted from his work on 'Practical Navigation.' This work has received the approbation of the naval authorities of Great Britain and of the United States, and is supplied to the fleets of both these countries. In it he gives a list of 16 books which he says 'may be considered absolutely essential to safe navigation in the present day, when the question of speed enters so largely into the calculation.' His list includes the Admiralty 'Tide Tables' and Galbraith and Houghton's 'Manual of the Tides and Tidal Currents' for the waters surrounding the British Islands.

COMMENCEMENT OF THE WORK.

In the following season of 1860 a practical commencement was made. It was proposed to make some further preliminary observations; to purchase a few tide gauges; and also to make available, as far as might be possible, some old tidal records for the years 1860 and 1861, which were discovered in the archives of the Hydro-

graphic office, formerly at Halifax. For these purposes a sum of \$2,000 was made available; and out of this amount a sum of \$1,554.96 was expended on the above objects.

The proposed observations were made by Lieut. Gordon at two points on the Atlantic coast of Nova Scotia; the object in view being to check the accuracy of the tidal differences between Halifax and other points along the coast, in order to make Halifax if possible a 'port of reference' for the whole eastern coast of Nova Scotia from Sestari Island to Cape Sable. This was the most important thing to do first, because of the hope that the records above referred to might prove a sufficient basis from which to compute tide tables for Halifax, which might serve in the meantime until a longer series of observations could be obtained. A further object in these preliminary observations, was to ascertain by the use of different appliances and methods, those which promised to give the best and most economical results. The details of this work and the descriptions of the appliances used are given in Appendix No. 16 to 23rd Annual Report, Department of Marine and Fisheries for 1890.

To ascertain the best form of tide gauge to employ, the most careful and exhaustive inquiries were made by the Minister, aided by the advice of Mr. Carpmæl, Director of the Meteorological Service. The difficulties in the case were exceptional, as at most points any ordinary apparatus is liable to freeze up in winter, and so to interrupt the record; and further, on grounds of economy, it was considered impossible to employ skilled observers for this special work, at the requisite number of stations.

The tides themselves on the coasts of Canada, vary so very much in their amount (from a height of four or five feet in the open Atlantic, to twelve and eighteen in the St. Lawrence River, and thirty feet and over in the Bay of Fundy) that a relatively large number of stations are required in order to follow their movements in any satisfactory way. In these circumstances a self-recording tide gauge, which will do the work of making the record of the tide day and night, with the least amount of supervision, is the most suitable and economical to use. To prevent freezing, and so to secure the record in winter as well as in summer, Mr. Carpmæl made special inquiries and experiments which are referred to in his report of December, 1890. (Appendix No. 16 to Annual Report, Department of Marine, 1890.) In making choice of the best form of tide gauge, Professor G. H. Darwin, of Cambridge, the most eminent specialist on tidal questions, was consulted. He kindly gave his advice in the matter; with a view also to the reduction of the observations, and calculation of tide tables from them. The gauge finally decided upon was the one devised by Sir William Thomson, and three of these were accordingly purchased to begin with.

The records of the Halifax tides above mentioned were submitted to Mr. Edward Roberts, of the Nautical Almanac office. Although there were breaks and imperfections in the record, he devised a special method of double computation by which these could be successfully overcome; and he was therefore able to report favourably upon them, and to recommend that tide tables should be computed from them. In making the calculations of these tides an ingenious and expensive computing machine was placed at the service of this department for a merely nominal fee. This machine was devised to facilitate the extensive tidal calculations made by the government of India. In this way tide tables were prepared for Halifax, first

issued for the year 1891, and since published annually by this department. These tables also contain tidal differences which make them available for all the important harbours on the eastern or Atlantic coast of Nova Scotia.

TIDE GAUGES, AND TIDAL STATIONS ESTABLISHED.

In order to decide upon the most suitable points at which to erect the tide gauges, the advice of Mr. T. O. Mendenhall, Superintendent of the United States Coast Survey, was asked, which he kindly gave; and Mr. Carpmal also visited personally a number of localities along the Lower St. Lawrence and in the Gulf, at such times during the following season as his other duties would permit. At this time also the ill health and subsequent death of Lieut. Gordon, removed him from further participation in the work, and left it entirely on Mr. Carpmal's hands.

The points considered most suitable for the erection of the first gauges were Father Point, Southwest Point of Anticosti Island, and the harbour of St. John, N.B.; and the sites which have been chosen for three additional gauges since purchased, were the Magdalen Islands, St. Paul Island, C.B., and the harbour of Quebec. For the purchase and erection of these gauges, an appropriation of \$10,000 was placed at the disposal of this department in each of the fiscal years of 1891-1892, 1892-1893, and 1893-1894; but the actual expenditure in the first two of these fiscal years was little over one-fourth of the appropriation voted.

The tide gauge itself consists essentially of a cylinder in an upright position, which is made to revolve by clock-work, once in 24 hours, and around this cylinder a sheet of graduated paper is placed. The tide, as it rises and falls, causes a float to move up and down in a vertical pipe, which communicates by a suitable opening with the sea. This float is connected by a fine wire with the wheels and gearing of the gauge, in such a way as to cause a pencil to move up and down on the cylinder in exact accordance with the movements of the tide, but with a much reduced range. The combined effect of the motion of the pencil and the rotation of the cylinder, is to trace on the paper an undulating curve which represents the tidal wave itself on a reduced scale. From this curve the height of the tide, the times of high and low water, and all the other elements required can be measured. Also, as high water is an hour later each day, the curves showing the tides on successive days will fall behind each other, and the gauge may therefore be allowed to go on making its record for a week on the same sheet without confusion of the curves. Alongside of this recording gauge, a 'sight-gauge' is placed to check the record on the other, and also to furnish a datum from which to measure the height of the tide. For this purpose there is a second vertical pipe, and a float with a staff upon it, which moves up and down with the tide itself. If the range of the tide is great, a steel tape passing over a pulley is used instead of the upright staff. The readings of this staff or tape need only be taken twice a day at convenient hours, and the corresponding points marked on the continuous record.

In placing such an appliance in position to record the tide, it is evidently necessary to secure the whole range of the tide within the vertical pipes. On ordinary beaches this can only be done by setting the whole appliance out in the water beyond the line of low tide; or else by placing it on shore and leading the tide to it by a trench or piping. It is this that occasions the chief expense in erecting the gauges in posi-

ons where there is no wharf already available, against which the gauge can be placed. The vertical pipes require to be surrounded by an open space in which heating is supplied in winter to prevent freezing, and their connection with the sea is made by means of a rose of small holes, in the endeavour to reduce or efface the motion of the waves within the vertical pipes.

In establishing the tide stations above mentioned, it was sometimes necessary in order to obtain the whole rise and fall of the tide, to construct a small crib of timber, and on this a small tide-house was placed to protect the instruments from the weather. These stations were erected under the immediate supervision of Captain Douglas, R.N.R., and their establishment often called for much judgment in meeting with practical difficulties which arose, and in taking advantage of local features to obtain sufficient shelter, in order to provide against their destruction by the ice, and the severe gales of the winter season. It will be unnecessary to describe the stations in detail beyond giving the following list of them, with the observers in charge, and the time during which they have been in operation to date.

TIDE GAUGE STATIONS ESTABLISHED UP TO DECEMBER, 1893.

St. John, N.B.—Gauge placed against wharf in harbour. D. L. Hutchinson, meteorological observer, in charge. In operation since December, 1892.

Southwest Point, Anticosti.—Crib erected for gauge. H. Pope, lighthouse-keeper, in charge. Observations commenced July, 1893.

St. Paul Island, C.B.—Gauge on a crib built into an opening between rock cliffs. S. C. Campbell, superintendent of the island lighthouses, in charge. Observations commenced September, 1893.

Magdalen Islands.—At Grindstone, on east side of the islands. Gauge in a well in a timber breakwater, for better protection. A. Le Bourdais, local superintendent of telegraphs, in charge. Observations commenced October, 1893.

Quebec.—Gauge placed at Lévis Dry Dock. U. Valiquet, engineer of Dry Dock, in charge. Observations commenced November, 1893.

Father Point.—(Beginning made.) Gauge to be placed in a well sunk on shore, and tide to be led to it by a trench and piping.

TIDES.

In the interests of shipping, the investigation of the tides has in general, three aspects: (1) The times of high and low water at the principal harbours of the country, and the range of the tide. (2) The times of high and low water at the smaller ports along the coasts, and the depth of water on shoals and bars at their entrances; in which the coasting vessels are especially interested. (3) The effects of the tides in producing currents. In this last respect the Lower St. Lawrence, the Bay of Fundy, and the inlets on our Pacific coast, are amongst the most noteworthy examples to be found anywhere. As regards high and low water, the aggregate interests of the coasting trade are probably as great as those of our few principal harbours.

In the St. Lawrence river itself above Quebec the tides have been observed for some time in connection with the work of improving the navigable channel of the river, carried out under the direction of Mr. J. Kennedy, Chief Engineer to the Har-

bour Commission of Montreal. Tide tables are now published by him for the use of the river pilots; and a signal station had been established to indicate the depth of water in the new channel. A detailed account of these tides is also given by Mr. R. Steckel, O.E., of the Public Works Department, which is based upon observations taken while carrying out his system of levelling operations. The results are given and fully illustrated in his Report of December, 1891, addressed to Mr. L. Costa, Chief Engineer of Public Works.

In the estuary below Quebec, throughout the Gulf of St. Lawrence and on the Atlantic coast, the tidal information which we possess is still based on Admiral Bayfield's survey of nearly 60 years ago; and these data, as the Hon. G. E. Foster recognized while Minister of Marine, are not sufficiently accurate for the present time.

To obtain the required information, tidal stations must be established at commanding points, in order to follow the general course of the tides; and from these the local differences for the smaller ports can afterwards be determined. In the choice of the main stations, the chief difficulty is that the large harbours are often the least suitable to use as stations from which to determine the tidal differences for other points along the coast. The reason for this is, that many harbours such as Quebec, St. John, N.B., and New York, are at the mouths of tidal rivers; and this has the effect of complicating the times of the tide with local conditions. To avoid this difficulty, Sandy Hook has been chosen instead of New York harbour, as a point of reference for other places along the Atlantic coast. At Quebec and St. John, the same local difficulties occur; and although it is necessary to observe the tides at these harbours on account of their own importance, it is doubtful whether St. John will answer satisfactorily as a port of reference for the Bay of Fundy. On this account it is advisable to establish an additional tide gauge as soon as possible at Yarmouth, which is the best available point. It is free from local influences, and the tides have a more medium range than at St. John, making results more reliable; and it best commands the entrance to the Bay of Fundy, as the tides enter the bay from the southwest. For the Atlantic coast of Nova Scotia, Halifax is undoubtedly the locality to select, as it has the advantage of combining both the objects referred to. It is a question, however, whether it would be best to place the gauge in the harbour of Halifax, where the influence of the accumulated tide in Bedford Basin may have an appreciable effect. It may be found on examination that a point outside the harbour, such as Chebucto Head, may give better results for the actual tide of the Atlantic.

In recommending the establishment of a tidal gauge at Halifax, it may be well to explain that to obtain a satisfactory basis for tide tables at so important a point the observations should be continued for a period of 19 years. This is the period of revolution of the moon's nodes, and the period in which eclipses recur successively in the same order. Although there is a recurrence in each year of unusually high tides at the equinoxes in the spring and autumn, due to the combined influence of the sun and moon at those seasons, yet the declination of the moon is different at each succeeding equinox until the period of 19 years has elapsed. At the end of that time the sun and moon are again in positions with respect to the earth which are practically identical with those which they had at first; and the whole of the associated phenomena, including the tides, recommence again in the same sequence.

This is therefore the shortest available lunar cycle for the correct computation of tides at any standard point.

As the Gulf of St. Lawrence forms a large area which is nearly land-locked, it is of the first importance to obtain complete information regarding the tides and currents at the two main entrances which connect it with the ocean. The northern entrance by the Strait of Belle Isle is only about 10 miles wide and 40 fathoms deep, while the other opening between Cape Breton and Newfoundland, known on the charts as Cabot Strait, has a width of 60 miles and a depth over the greater part of this extent of about 250 fathoms. In comparison with these, the Strait of Canso need not be taken into account in its relation to the tides and currents of the Gulf as a whole; but with regard to these two main entrances themselves, it must not be taken for granted that their influence depends solely upon their relative dimensions. Judging by the movement of icebergs in the Strait of Belle Isle, the general opinion is that a large amount of cold water finds its way through it into the Gulf. This may be in reality a branch of the Polar current on its way south from Baffin's bay. Although this entrance to the Gulf may seem unimportant as compared to the other, it should be remembered that a current of even half a mile an hour through this Strait would admit to the Gulf a volume of cold water more than 20 times greater than the volume discharged by the River St. Lawrence.

As regards tide, however, there is little doubt that the amount entering the Gulf by the Strait of Belle Isle is relatively very small; but owing to the nature of tidal undulations, it is quite possible that its effects may be felt farther than at first sight would seem likely. In addition to this, the tide is sure to have a direct influence on the movement of the current in the Strait. It is therefore necessary to establish a tide gauge there as soon as possible. The best position will probably be at Forteau Bay, where there is a wharf and good shelter. This bay is also at the narrowest part of the Strait, where the currents can best be observed.

The main tide found in the Gulf undoubtedly enters by Cabot Strait (between Cape Breton and Newfoundland) from the general tidal wave in the Atlantic, which advances from the southeast. It is a remarkable fact that the tidal wave which enters here, does not lose itself in the great expanse of the Gulf area, but is again found with a range even greater than before in the passage between Gaspé and Anticosti, and from there continues its course, with ever increasing height, up the St. Lawrence to Quebec. This is well illustrated by the curves already recorded by the tide gauges. The progress of the tidal wave in this leading direction, must be largely due to the existence of a deep channel, which crosses the whole extent of the Gulf from Cabot Strait to the passage referred to, between Gaspé and Anticosti; and thence extends up the St. Lawrence nearly to the Saguenay. This channel thus extends for a distance of 500 miles, with an average width of 35 miles, and a continuous depth of over 150 fathoms. It is this channel which forms an avenue of least resistance for the progress of the tidal wave.

This will explain in general the reasons for the positions chosen for the tide gauges. It was evident that observations at some point in Cabot Strait would furnish a key to the situation; but the rocky cliffs on both sides, at Cape North and Cape Ray, and the rocky character and exposed situation of St. Paul Island, made it appear impracticable to place a tide gauge there. In locating the gauge on the

Magdalen Islands, however, although it was placed on their eastern side, it soon became apparent that the tidal wave had already lost its full range in the expanse of the Gulf. A careful examination was therefore made to find if possible a position on St. Paul Island sufficiently sheltered to protect a gauge from destruction. The sheltered site at which the gauge now stands, was eventually discovered; and observations in Cabot Strait itself are thus being secured.

On the main line of the progress of the tidal wave from St. Paul Island to Quebec, a distance of 650 miles, the intermediate tide stations which have been selected as most suitable are the Southwest point of Anticosti Island, and Father Point. These two points have the following important advantages: They are near to the edge of the main channel above described, which traverses the Gulf; and they are similarly situated with regard to it, as they are both within six or eight miles of the 100-fathom line; they are both situated on the open coast, where they are unaffected by such local conditions as might exist in a bay or inlet. On these grounds they are admirably adapted to follow the progress of the tide and serve as reference stations. The only position that can claim superiority to Father Point as commanding the mouth of the St. Lawrence, is Point de Monts on the north shore; as this stands more truly at the dividing line between the river and the Gulf. Against this, however, Father Point has the practical advantage of being the Pilot Station, where direct information regarding tides and currents is of the first importance and can be made immediately available.

In this chain of tidal stations an important region is still omitted. The line of the main channel across the Gulf from Cabot Strait to Gaspé, is very direct with only a slight bend to the northeast in passing the Magdalen Islands. This main channel thus forms the deep-water edge of the large semi-circular bay of comparatively shallow water, which is bounded by the wide sweep of coast from Gaspé along New Brunswick to Cape Breton, and in which Prince Edward Island lies. The depth of water throughout this bay averages only about thirty fathoms; and the tidal wave has to pass over an extent of about 200 miles of this shallow water to reach its shores. It is therefore most important to establish at least one tide station somewhere near the centre of the sweep of coast which bounds it. The position we would recommend would be in the vicinity of Miramichi Bay; as this is the point farthest removed from the deep water and from the tidal entrance at Cabot Strait. The tide gauge now on the Magdalen Islands will give, in a comparatively short time, a record sufficient to establish its tidal difference from St. Paul Island; and it can then be utilized for the more permanently important position at Miramichi. This change may therefore be made with advantage before the end of next season.

At Father Point the erection of the tide gauge was only begun, up to the beginning of the present winter, when the ice stopped further operations. It is a position which presents much difficulty, as the gauge has to be placed above high-water mark to prevent it from being carried away by the heavy ice which drifts up and down the river with the tide. This necessitates the excavation of a trench 280 feet in length across a foreshore of shale rock to lead the tide to the gauge. On account of these difficulties the wharf at Rimouski, some six miles distant, was examined before the work was commenced. The dredging of the silt to deepen the water at this wharf has caused it to settle, and there is no certainty that further settlement may not take

place, which would interfere seriously with observations made by a gauge placed upon it. Also in winter, there is no one at the wharf in the employ of the government to carry on the observations; and the employment of a competent observer for the purpose would be less economical than to make the expenditure required to establish the gauge at Father Point. The practical advantage of Father Point as the Pilot Station, is a still more important argument in its favour. The erection of the gauge there should therefore be carried out as soon as possible next season.

To complete the number of principal stations for the tidal observations in accordance with the explanations above given, three additional tide gauges should be erected at Yarmouth, Halifax, and Belle Isle, respectively; the station at Father Point should be established, and the tide gauge on the Magdalen Islands should be removed to the vicinity of Miramichi Bay. I would recommend that this be done during the coming season in order that the stations may be in operation at the earliest possible date.

CURRENTS.

There are two ways in which marine currents may be classified. From the point of view of the main routes of navigation which traverse the Gulf and follow our coasts, they may be termed Speed Currents or Cross Currents, according as they assist or retard a vessel, or tend to carry it laterally out of its course. The Gulf Stream off the American coast affords an example on a large scale of a speed current; as vessels between New York and the West Indies can obtain a distinct advantage in time by following or avoiding it. On the other hand with reference to the causes which give rise to the currents, a distinction may be made between tidal currents and those produced largely or wholly by the wind. In this connection also, the relation between surface currents and under currents is important; as the wind may displace a surface current from its normal position, and thus allow the water beneath to replace it to a greater or less extent. There are other causes also, such as difference of temperature, which may bring an under current to the surface, or occasion a surface current to sink. It must not, therefore, be hastily assumed that information regarding under currents is of no practical use for the purpose of navigation. In addition to these causes the height of the barometer may also have an appreciable effect on the movement of currents.

In illustration of the above points, some examples may be given from what is already more or less distinctly known or supposed to take place in the Lower St. Lawrence and Gulf; and these examples may also serve to show the nature of the information that it is so important to obtain with at least some degree of certainty.

From Quebec to Father Point the tidal currents occupy the whole width of the river; and although they may class as speed currents, it is only the smaller sailing craft that take any advantage of them. The steamships take their chance of gain or loss and disregard them; although the direction of the current has to be considered in calculating time of arrival in port, and making railway connections. Where the river widens the case is different, as part of the width is occupied by a constant downward current which appears usually to run parallel to the south shore at no great distance from it, all the way to Gaspé. It is possible that this current may prove to be due in some measure to the warmer and fresher waters of the St. Lawrence River, which would naturally float to the surface; and its tendency to keep to the south side may be occasioned by the prevailing direction of the wind. There is also some reason to suppose

that with severe or long continued southwesterly winds, this current is displaced from its usual course and made to set in against the south side of Anticosti. If this supposition is correct, it would help to account for the 'Caution' found on the chart in this neighbourhood to the effect that 'the currents are governed principally by the wind.' A knowledge of the usual course of such a current, and the reasons for its change in position, would enable this vague caution to be replaced by some much more definite statement, to show mariners what they have actually to expect. In the part of the Gulf to the eastward of the Magdalen Islands and Anticosti, there are some indications that the surface water has a movement in a northwesterly direction. If this movement is found to exist either permanently or at certain times, it will furnish an example of a cross current on the route of vessels coming inwards through Belle Isle. The tendency of such a current to set them to the northward of their course, would then help to explain why so many vessels in endeavouring to round the eastern end of Anticosti are wrecked on its northeastern shores. The great importance of ascertaining the actual facts in such cases as these is very evident.

There are other directions also in addition to the interests of shipping, in which a knowledge of the currents may be indirectly of practical importance. The good fishing grounds on the Atlantic coasts of Newfoundland and Nova Scotia and along New England are acknowledged to be due to the cold northern current which skirts these shores. It is generally believed that the cold water which enters at Belle Isle, floods the bottom of the Gulf in its deeper parts; and some knowledge of the extent to which this is the case may throw light indirectly on the distribution of cold-water fish in the Gulf area. On the other hand, the oyster is found in the warmer waters of the Gulf, along the shores of New Brunswick and Prince Edward Island; although on the Atlantic coast it does not thrive north of Delaware bay. The water is naturally warmest in the shallow parts which are least disturbed by currents; and the relation between the movement of the water and the temperature, may therefore have a bearing on the localities which the oyster prefers.

It is well known that the height of the barometer has an effect on the height of the tide. This is explained in general terms, by saying that the decreased pressure of the air allows the tide to rise higher than it otherwise would; as the difference in pressure of an inch of mercury corresponds to about a foot in the height of water. The amount of difference likely to occur in the actual height of the tide from this cause, is of little practical importance, except in the case of a harbour with a bar across its mouth. But the effect on the tidal currents may often be much more marked. For example, a low barometer over the Bay of Fundy with a rising tide can hardly fail to increase the velocity of the currents; and the amount of this increase ought to be determined. In land-locked areas such as the Gulf of St. Lawrence, the effect of the barometer is usually quite distinct, if we may judge by such similar instances as the Baltic Sea and the Gulf of Mexico. With a high barometer over the area of that Gulf, and a lower pressure over the ocean outside, the speed of the Gulf Stream is appreciably affected. The conditions are closely parallel in the case of the Gulf of St. Lawrence, when the low pressure area of a storm is passing over the outer banks, on the course which these storms usually follow. If this is also accompanied by a strong northwesterly wind across the Gulf, it is to be expected that a considerable volume of water will be driven out at Cabot Strait by these two causes acting together, and that the general equilibrium of the Gulf will be disturbed.

On account of these effects of the changes in atmospheric pressure, the readings of the barometer are always recorded in connection with tidal stations. This is being done in all cases in which there is no neighbouring meteorological station which will serve the purpose.

TIDES AND CURRENTS OF THE PACIFIC.

On the Pacific coast the principal harbours of Victoria, New Westminster, Vancouver and Nanaimo, are all situated on the straits or interior waters within Vancouver Island; and the tides and currents in these are very complicated in their character. As the Strait of Georgia, which forms the largest of these interior waters, communicates with the Pacific both to the west and to the north, the tides enter from both these directions; and the tidal currents of the numerous sounds and inlets which open off the Strait itself, are thus complicated with those of the entering tides. It will therefore be necessary to determine as a basis the tide in the open Pacific, where it is uninfluenced by the effects of the currents in the inlets. For this purpose the best point to select is probably Cape Beale on the west side of Vancouver Island. It is the most northerly lighthouse point on that shore, and farthest removed from the mouth of the Strait of San Juan de Fuca; and the form of the Cape itself indicates a good shelter beside it.

In selecting a position at which to observe the general tide in the area of the Strait of Georgia, it must be remembered that the object in view is chiefly to establish a standard to which the direction and time of change of the currents can be referred; just as the currents in the English Channel are referred to the time of high water at Dover. For the straits and inlets of the Pacific coast, the speed of the currents, their direction and time of change, are fully more important to a vessel than the actual time of high water at the harbour to which it may be bound. With this in view, the harbours of Vancouver and New Westminster which open off the Strait, are not likely to prove suitable for the purpose, on account of the disturbing influences of Burrard Inlet and the Fraser river. The position chosen should be on the open shore of the Strait, where it would be free from such influences, and also from the tide-rips which occur at the mouths of the smaller channels. A position at or near Nanaimo would fulfil these requirements, and would also be centrally situated with regard to the area of the Strait. It is probably that this will prove on the whole the most suitable position for a tide station, to which the currents throughout these straits can be referred. It will serve at the same time as a reference station from which the tides at Vancouver and New Westminster can be determined.

The harbour of Victoria occupies an intermediate position between the outside tides of the Pacific and those of the interior waters of the Strait. It would be well, therefore, to have a tide station at Victoria or Esquimalt to command the Strait of Fuca, and to serve as a connecting link between the outside and inside tides as found at the other two stations, as well as for the sake of the harbour of Victoria itself.

The northern navigation to Alaska must remain for some time to come in the hands of captains who have had the opportunity to acquire a local acquaintance with the tides and currents on that route. But for the principal harbours of British

Columbia the three positions above indicated will serve as reference stations for the tides and currents on the main lines of navigation. The tide gauges at these points should be erected at the same time, to obtain the relation required between the observations.

In considering where additional tide gauges are first required and where the survey of the currents should be commenced, the relative needs in the interest of shipping should be kept in view. On the Pacific coast, the currents themselves are on the whole stronger and more variable than those encountered by the same class of vessels on our eastern shores. On the main lines of navigation, however, the pilots join the vessels at the entrance to the Strait of Fuca; and the vessels thus obtain the assistance of local knowledge from the outset, for the straits and inlets of that coast. In the Gulf of St. Lawrence, which is traversed on two different routes by trans-Atlantic vessels, the captains have to navigate its whole extent of some 600 miles after making land, before they reach the pilot station at Father Point. It is therefore advisable that the credit which may be made available for the purposes of this survey, should be laid out during the coming season in completing on our eastern shores the number of tide gauges required, and commencing the survey of the currents. If these are completed this season, a corresponding outlay in the season of next year, to that now estimated for the establishment of tide gauges, would equip the Pacific coast with the gauges required to obtain a basis of reference for both tides and currents.

SURVEY OF CURRENTS.

The information obtained by means of the survey should be classed and described as (1) normal conditions; and (2) exceptional conditions and disturbing influences. The normal conditions of the Gulf of St. Lawrence during the season of navigation, are a fairly steady barometer and prevailing wind from the southwest; and some of the exceptional conditions already described may be taken as examples of disturbing influences.

Under the normal conditions then, the leading causes which produce the currents are the tides themselves and the force of the prevailing wind. It is therefore necessary that the winds and tides should be observed throughout the time that the survey of the currents is in progress. In recording the winds, Mr. Carpmæl will be glad to co-operate by equipping more fully any of the present observatories where this may be necessary. This survey will also afford another direction in which the numerous meteorological observations now taken, may be utilized for the practical advantage of seamen. When all the tidal stations which we have indicated are established, there will be five in the Gulf and Lower St. Lawrence without counting Quebec. These must be maintained while the survey of the currents is being made, to furnish the tidal data required; and during that time it may also be possible to determine some of the tidal differences between the present stations with sufficient accuracy to enable one or more of the tide gauges to be removed and utilized at new positions. It is therefore most advantageous in the interests of the work as a whole, that the survey of the currents should be commenced at once. It will also prove more economical in the long run to do so; and there is the further practical advantage of obtaining as soon as possible, information which is so much needed. It is therefore advisable that this branch of the work be commenced this season.

The records made by the tide gauges now in operation have already accumulated to some extent; and it is only at present that a beginning is being made in the direction of working up the results. With the commencement of the survey of the currents, the staff at work in the summer season, could be utilized in the winter months to work up the tidal observations of the whole year. This affords a further reason in favour of carrying on the two branches of the work together.

METHODS AND APPLIANCES.

With regard to methods and appliances, it will only be necessary at present to make a few general remarks. Marine surveys have received a great stimulus in recent years from the *Challenger* expedition fitted out by the British Admiralty and from the investigations of the Gulf Stream by the *Blake* in connection with the United States Coast Survey. Much progress has thus been made in the appliances used; the use of the drift buoy for the measurement of currents has been largely superseded by the current meter, although in some cases the older methods can still be used to advantage. The appliances devised for the *Blake* have made it practicable to anchor in depths ranging from 2,000 to 3,000 fathoms. It is of the greatest advantage to work from a vessel at anchor, as it affords a fixed point from which to determine the direction and velocity of the currents. This is especially important where the land is too distant to determine the direction and speed of a current by the drift of the vessel itself; and such determinations from drifting are in any case complicated with lee-way from the wind. The depths in the Gulf are not so formidable as those encountered by the *Blake*, as they nowhere exceed 300 fathoms. For the survey of currents, the use of a sailing vessel is found to be impracticable on account of the long delay in arriving at the spot where the observations are required and the impossibility of doing so in a calm, which is the very time when the observations would be the most accurate, the long time required to heave up the anchor by a hand windlass, and the danger to the vessel during this delay, if bad weather is the cause of departure. For these reasons it is necessary to have a steamer with steam winches, &c., which a few additional appliances would prepare for anchoring.

The observations should include the density and the temperature of the water, as well as the direction of the currents. The density is chiefly useful as an indication of its admixture with fresh water, either in the estuary or in the neighbourhood of melting icebergs. The temperature has always been found a valuable guide in tracing currents. In some situations it will be advisable to determine the under currents also. The speed of the surface currents themselves should be determined at a uniform depth of 10 feet, as this may be taken in general as half the average draught of a vessel. The speed, at this depth, will best show the movement of the body of the surface water, in relation to its effect in drifting a vessel.

In the coming season, I would recommend, as the most effective way to commence the work, that surveys be made of the two main entrances to the Gulf, at Belle Isle and at Cabot Strait, between Cape Breton and Newfoundland; in order to determine the amount and direction of the currents that may be found to pass through these dominant openings. To do this work satisfactorily, observations should be carried on simultaneously at the two places, and should be continued for about three months, in order to secure the truly normal conditions of the currents, the effect of the differ-

ences between the spring and neap tides, and the disturbing effect of such exceptional conditions as may occur during that time. The under currents should be determined as well as the surface currents, so that the total amount of water which enters or leaves the Gulf area by these openings may be ascertained. The volume discharged by the St. Lawrence may be taken into account, although a very slight movement of the waters at these large openings would more than make up for it. In this way some general basis will be obtained for the survey of the currents in the interior of the Gulf.

The sum required to carry out this work during the fiscal year 1894-1895 is shown in the estimate which I beg to append below; and I believe that to carry out the work as outlined and estimated in this report, is the most efficient and economical way of carrying on this survey from the position it has already reached.

COMPLETION OF THE SURVEY.

The time required for the survey of the currents on both the Atlantic and Pacific coasts will be about six or eight years, on the basis of an annual expenditure as indicated; and the average annual cost should be fully covered by the amount of the present estimate, with the exception of the sum allowed for the use of the steamer, which in future years should be available for the full season. With this proviso, it will be possible in the time stated to survey the currents in the open waters traversed by the ocean-going vessels, and on the main routes leading to our principal harbours; but it does not contemplate an examination in detail of the currents in the less important bays and straits. The amount of the estimate also includes the additional tide gauges to be established in the first two seasons in advance of the survey of the currents in each region. The margin corresponding to this in later years can be used to carry forward the tidal work, until the completion of the survey of the currents; when the remaining tidal work can be completed satisfactorily on the basis of a much reduced expenditure.

SUMMARY.

The following summary may be given in conclusion, with special reference to the work for the coming season:—

1. The representations made in past years have shown the imperative need of obtaining full information as to the tides and currents in Canadian waters; and this is now generally admitted and recognized.
2. A practical commencement has been made by the erection of five tide gauges now in operation experimentally, and also by the publication of tide tables for the port of Halifax by this department.
3. It is now proposed to complete a series of tide gauges required in the Gulf, and on the Atlantic coast; and also to commence the Survey of the currents in the Gulf of St. Lawrence.
4. The credit of \$10,000 voted by Parliament, was for the erection of tide gauges and the reduction of the tidal observations; and did not include provision for the Survey of the currents.

5. It may also be noted that out of the two annual credits of \$10,000 each, made available up to June, 1898, little over one-fourth was actually expended on the work.

I have, sir, the honour to remain,

Your obedient servant,

W. BELL DAWSON,

Engineer in charge of Tidal Survey.

SURVEY OF TIDES AND CURRENTS.

ESTIMATE FOR THE FISCAL YEAR 1894-95.

Three new tidal stations at Belle Isle, Halifax, and Yarmouth, including cost of tide gauges and erection....\$	3,500
Removal of tide gauge from Magdalen Islands to Miramichi, after nine months.....	900
Establishment of gauge at Father Point.....	700
Maintenance of nine tidal stations, at \$300 each, including salary of observers.....	2,700
Publication of tide tables.....	300
Engineer in charge, salary.....	2,000
Assistant to supervise erection of tide gauges, and three assistant surveyors and computers, for survey of the currents, and for working up the tidal observations.....	3,600
Travelling expenses and field expenses of staff.....	1,800
Hire of boatmen.....	900
Fittings for steamer, deep sea anchorage, sounding appliances, current meters, instruments, &c.....	2,500
Add for contingencies—say 5 per cent.....	1,100
	\$20,000.
Use of steamer for four months at the rate of \$15,000 for a full season of seven months.....	9,000
	\$ 29,000

[Faint, illegible text covering the majority of the page, likely bleed-through from the reverse side.]

11
12
13
14
15

APPENDIX.

EARLY TIDAL INVESTIGATIONS AND REPORTS FROM 1880 TO 1893.

1880. Deputy Minister's Report, in the Annual Report of the Department of Marine for 1880. Under the heading TIDAL OBSERVATIONS:—

During the past season, the attention of the Department has again been drawn to the importance of establishing a series of stations on the coast of the Dominion for the purpose of making tidal observations, and a report by Lieut. Gordon, R.N., as to the importance of such observations and the probable cost of carrying them out, forms an appendix to this report.

1890. Annual Report of the Department of Marine for 1890; Appendix No. 16. Reports on Tidal Work, by Mr. Charles Carpmæl, Director of the Meteorological Service, and Lieut. A. R. Gordon, R.N.R., as already cited, page 7.

1891. Deputy Minister's Report in the Annual Report of the Department of Marine for 1891. Under the heading, TIDAL OBSERVATIONS:—

The objects of Tidal Observations are two, first to make it possible to predict the time and height of high and low water on any day and at any time; second, to connect therewith observations of tidal currents. It is this second object which has recently most attracted the attention of those interested in shipping within the Dominion. Many ships have run ashore and been wrecked in the darkness when the officers had supposed themselves far from shore. It has been improperly assumed that tidal currents are always connected with the direction and force of the wind and defy prediction. While this is true of surface currents, there is reason to suppose that by far the greater part of their irregularities are truly tidal and their laws may be ascertained by a proper system of observation.

All the observations on the tides which had until quite recently been worked up had been taken and reduced by methods which are now recognized as being inadequate to the solution of the problem. It was therefore decided to take observations at a number of points in the Dominion and have them reduced by modern methods. For this purpose three self-recording gauges were imported from Scotland and sites were selected for the erection of these gauges during the season of 1891 by Mr. Carpmæl at the following places, viz.: St. John, N.B., Father Point, P.Q., and South West Point, Anticosti.* It is proposed to keep the self-recording gauges in operation for nineteen years for the purpose of ascertaining the long period tides. At other points similar observations with similar gauges will be necessary, extending over a period of three years, while at the same time, observations for a period of two months will be taken at numerous intermediate stations in order to complete the system.

Mr. Carpmæl during the month of October visited certain points for the purpose of ascertaining their suitability for observing stations and has reported that it would be better to leave the establishment of some ten tide-staff stations until the opening of navigation next spring. The expenditure on account of tidal observations including instruments, salaries of observers at Liscomb and Canso, N.S., and reduction of observations at Halifax was \$1,654.96. Tide tables for the port of Halifax were distributed in 1890 for the past year† and tide tables have already been distributed to Collectors of Customs along the south coast of Nova Scotia for the year 1892, free of charge.

* These tide gauges were not in satisfactory working order until 1894 and 1895.

† This means the year 1891, the first year of publication.

1892. Annual Report of the Department of Marine for 1892; Appendix No. 4, on the Meteorological Service. Report by Mr. C. Carpmæl, addressed to the honourable the Minister of Marine and Fisheries, Ottawa. Under the heading TIDAL SERVICE:—

SIR,—I have the honour to submit herewith the report on the Tidal Service from December 31, 1891, to June 30, 1892.

The working up of the observations already taken was proceeded with.

Three additional tide gauges have been ordered from Mr. J. White, of Glasgow. One of these it is proposed to place at Lévis dry dock. The others I would suggest should be used in the Gulf of St. Lawrence, one probably on the Magdalen Islands and the other on St. Paul's Island.

The tide-house and box for placing at Southwest Point, Anticosti, were constructed at Quebec.

The work at Father Point was found much more difficult than was anticipated. Owing to the character of the rock, blasting has but little effect, and it was found that it would cost more than double what had been estimated. Accordingly the work was suspended to see whether some cheaper method of construction could not be found. The great difficulty to be guarded against in this case is the danger of the observations being interfered with by frost.

At St. John the difficulty with respect to the site was not settled as expected, and accordingly nothing could be done until after the close of the fiscal year. I may add that since the close of the fiscal year the work has been pushed forward, although, owing to a storm having destroyed the erection for carrying the gauge at Southwest Point, Anticosti, the only one of the three gauges, already received from the makers, which will be in operation during the coming winter, will be that at St. John, N.B. Full particulars of the work performed this summer will be given in my next report.

1893. Annual Report of the Department of Marine for 1893. Appendix No. 3.

The report of Mr. Carpmæl in this appendix, is dated Toronto, September 28, 1893, and the following extracts will explain the work done under his supervision, up to that date:—

I have the honour to report that early in July I secured the services of Capt. B. Douglas, R.N.R., to assist in the work of erecting gauges and in other work connected with the service.

Capt. Douglas joined me at Quebec on July 16, and we proceeded by the government steamer *Alert*, and arrived at Southwest Point, Anticosti, on July 26.

After together examining the site which I had selected in the previous year, we agreed that it was the most eligible that could be chosen, that it was capable of being made safe with certain appliances, and the expenditure would be less than at any other site.

The column and other materials for the erection of the gauge were landed, and with the assistance of two carpenters and some labourers, the gauge was placed and was in working order by the 12th of August.

On the 7th it blew hard from the northwest, a speed of 32 miles, and a very heavy sea rolling in, afforded a good test of the stability of the structure. But it stood well; the vibration of the column was slight.

Those who had experience of such work as well as those resident on the spot agreed that the structure as placed was secure, but as will be seen later, these anticipations were not verified.

Leaving Southwest Point on the 12th August, we proceeded to St. John, N.B. We selected a site in the northeast corner of the warehouse on Reed's Point wharf, in preference to one I had inspected outside the warehouse, and where the gauge recently erected now stands, but at that time the harbour master considered it was not eligible, owing to its being exposed to danger of injury from ships' lines and hawsers.

We then proceeded to Grindstone, Magdalen Islands, where we arrived on August 23. During our stay an excellent site for a tide gauge was selected at the east end of the breakwater built by one of the leading merchants, Mr. Leslie. A plan and speci-

location of the work to be done were prepared, tenders for which were invited by Capt. Douglas on his arrival at Pictou.

We left Grindstone on August 30, and I instructed Capt. Douglas to proceed to the Island of St. Paul's, Cabot Strait, and see if he could find a suitable site for a gauge, and then to proceed with the erection of the gauge at St. John, N.B. I myself landed at Souris, P.E.I., which I found would be a suitable place for a gauge.

Captain Douglas found St. Paul's a very difficult place to visit and much time was lost owing to his having to wait for the ss. *Harlaw*, the only steamship calling there; it was therefore the 9th of September before he landed.

He soon found an excellent site in a small cove. A good shelter from easterly gales and the Atlantic ocean is afforded by the small rocky island running parallel and close to the shore of the main island. The depth of water at low water springs is three feet, but that can be increased by one or two feet by the removal of the loose stones and boulders on the bottom, and the foundation made level and secure thereby. The bottom is rocky with very little deposit of sand or silt, and that would entirely disappear in the fall when bad weather brings in heavy seas on the coast. The site is about 530 yards from Mr. Campbell's, the superintendent, house. The road is good, but from twenty to thirty yards from the level track to the face of the cliff above the proposed site a path protected by a handrail and rough planking would have to be made at a small cost. From the edge of the cliff to the top of or side of the office, steps for descending would be required.

Captain Douglas returned to St. John, N.B., on the 14th September, and tenders having been asked for, the offer of Messrs. Beatty & Thompson was accepted.

The work was a very difficult one to accomplish, as the gauge column had to be placed on the rocky bottom of the harbour in 53 feet of water at high water spring tides. The bottom was too hard to drive piles into; the wharf against which the gauge is placed is not in good condition; the rise and fall at springs is 30 feet, and the gauge column had to be heavily ballasted to counteract the floating power of 36 feet, which had to be perfectly water-tight.

Captain Douglas left for Anticosti on the 28th October and returned to St. John, N.B., on the 14th November, where he found the work nearly completed, but the gauge column needed protection from ice and small craft using the small dock steps. To effect this, strong sheet piling was placed to about 2 feet below the zero I used in placing the gauge.

On the 1st October a very hard gale from the northwest brought in an unusually heavy sea at Southwest Point, Anticosti, which washed away the beams and other fastenings of the gauge column, as well as a large quantity of stone ballast used in the foundation of the work, and as a protection from the outside.

Miss Jessie Pope, who was in charge of the gauge in the absence of her brother, Mr. Herbert Pope, at the time it was wrecked, during the gale at great personal risk, saved the valuable mechanism in connection with the automatic gauge, and enabled Captain Douglas to bring it to headquarters after his second visit to Anticosti.

Captain Douglas visited Southwest Point in November last and made a careful re-examination of the day.

During the winter it was found that the eye reading gauge at St. John was not working satisfactorily and another form of gauge was substituted for it. This likewise did not work well and it was found that some one had dropped things into the well and almost choked it. The well was cleaned out and then worked satisfactorily.

It was found that it would be cheaper in re-erecting the gauge at Southwest Point, Antocosti, to use an old boiler for placing the tide well in, than a wooden box as before.

While the necessary fittings were being made and the materials for the crib-work were being got together, Captain Douglas visited several points near Cape Rosier and found at Fox River a suitable position for a gauge. He then took the gauge, well, materials and workmen to Southwest Point.

Next season the work of observing the tidal currents should be commenced, and short series of tidal observations taken at Fox River, Souris and some other stations to be yet selected.

The first Annual Report of the Department of Marine for 1893. Appendix No. 4.

Report by Lt.-Col. W. P. Anderson, Chief Engineer, on Hydrographic Work; addressed to the Deputy Minister of Marine and Fisheries, Ottawa:—

Sir,—I have the honour to submit the following report of work done in the Technical Branch of the Department of Marine and Fisheries, in connection with the Hydrographic Surveying and Tidal Observations during the past year.

TIDAL OBSERVATION WORK.

Mr. William Bell Dawson, civil engineer, has been appointed to take charge of this special work undertaken by the Department of Marine and Fisheries. He submits a very full report of all work done in connection with Tidal and Current Observations up to the present date, which I inclose herewith. (Inclosure 'A'). A report of work done in this service while under the charge of Mr. Carpmal, prior to Mr. Dawson's appointment, will be found in Appendix No. 3, attached to his report as director of the Meteorological service.

The first Report on the Survey of Tides and Currents by Mr. W. B. Dawson, dated 13th January, 1894, appearing as 'Inclosure A' in the above-mentioned report of the Chief Engineer, is the report which is given in full herewith.

