

**CIHM
Microfiche
Series
(Monographs)**

**ICMH
Collection de
microfiches
(monographies)**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

© 1994

Technical and Bibliographic Notes / Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- Coloured covers/
Couverture de couleur
- Covers damaged/
Couverture endommagée
- Covers restored and/or laminated/
Couverture restaurée et/ou pelliculée
- Cover title missing/
Le titre de couverture manque
- Coloured maps/
Cartes géographiques en couleur
- Coloured ink (i.e. other than blue or black)/
Encre de couleur (i.e. autre que bleue ou noire)
- Coloured plates and/or illustrations/
Planches et/ou illustrations en couleur
- Bound with other material/
Relié avec d'autres documents
- Tight binding may cause shadows or distortion
along interior margin/
La reliure serrée peut causer de l'ombre ou de la
distorsion le long de la marge intérieure
- Blank leaves added during restoration may appear
within the text. Whenever possible, these have
been omitted from filming/
Il se peut que certaines pages blanches ajoutées
lors d'une restauration apparaissent dans le texte,
mais, lorsque cela était possible, ces pages n'ont
pas été filmées.

- Coloured pages/
Pages de couleur
 - Pages damaged/
Pages endommagées
 - Pages restored and/or laminated/
Pages restaurées et/ou pelliculées
 - Pages discoloured, stained or foxed/
Pages décolorées, tachetées ou piquées
 - Pages detached/
Pages détachées
 - Showthrough/
Transparence
 - Quality of print varies/
Qualité inégale de l'impression
 - Continuous pagination/
Pagination continue
 - Includes index(es)/
Comprend un (des) index
- Title on header taken from: /
Le titre de l'en-tête provient:
- Title page of issue/
Page de titre de la livraison
 - Caption of issue/
Titre de départ de la livraison
 - Masthead/
Générique (périodiques) de la livraison

- Additional comments: /
Commentaires supplémentaires:

This item is filmed at the reduction ratio checked below/
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	14X	18X	22X	26X	30X
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12X	16X	20X	24X	28X	32X

The copy filmed here has been reproduced thanks to the generosity of:



National Library of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol \rightarrow (meaning "CONTINUED"), or the symbol ∇ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

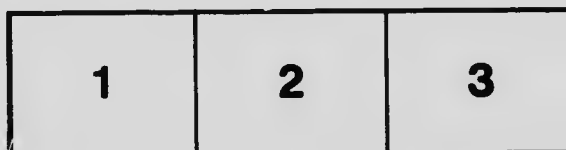

L'exemplaire filmé fut reproduit grâce à la générosité de:


Bibliothèque nationale du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.


Un des symboles suivants apparaît sur la dernière image de chaque microfiche, selon le cas: le symbole \rightarrow signifie "A SUIVRE", le symbole ∇ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

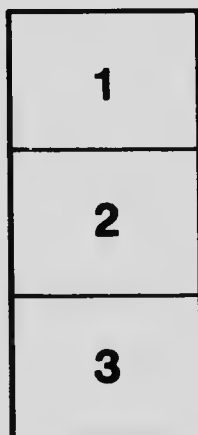


MICROCOPY RESOLUTION TEST CHART

(ANSI and ISO TEST CHART No. 2)

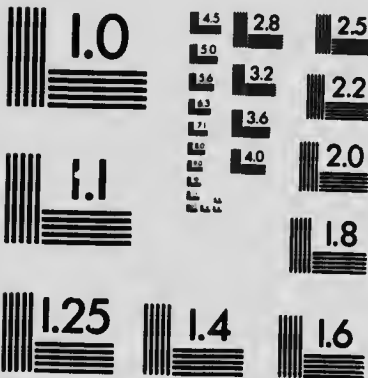

APPLIED IMAGE Inc

1653 East Main Street
Rochester, New York 14609 USA
(716) 482 - 0300 - Phone
(716) 288 - 5989 - Fax

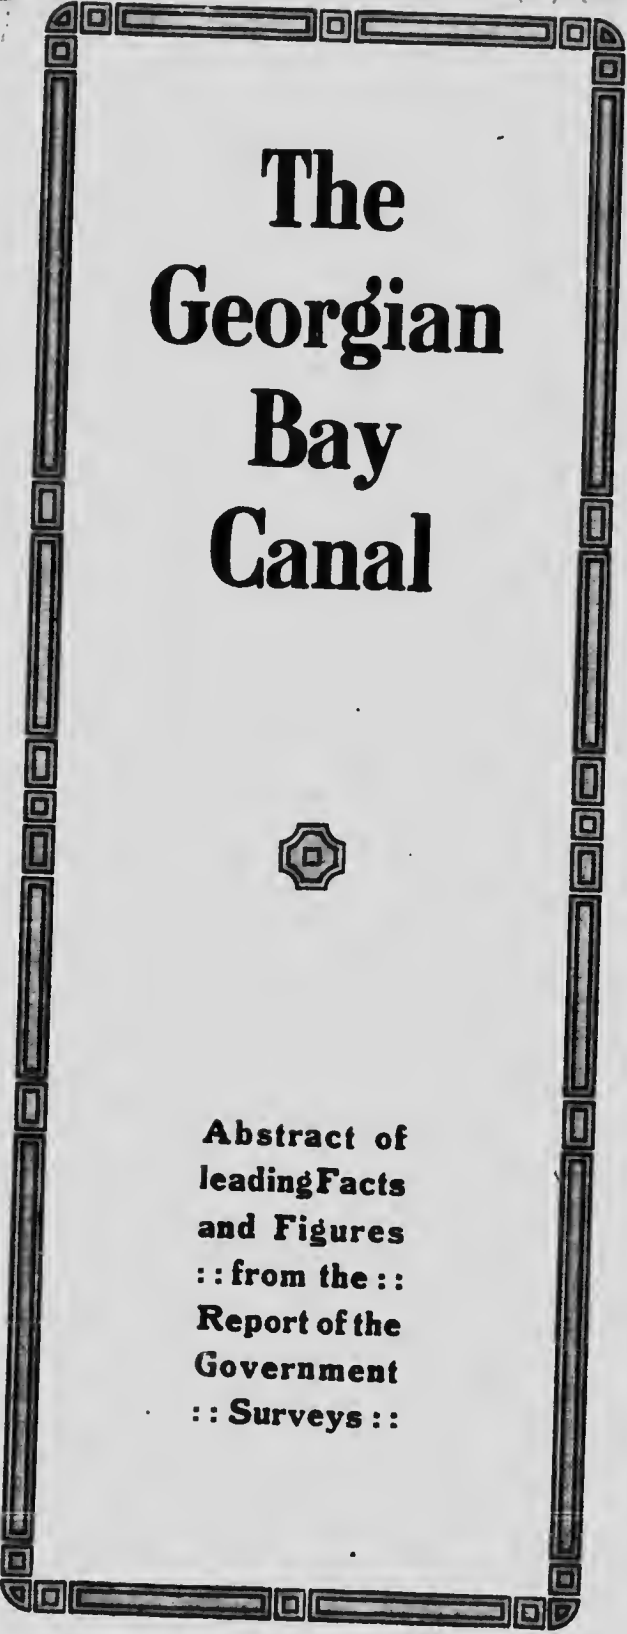

The Georgian Bay Canal



**Abstract of
leading Facts
and Figures
:: from the ::
Report of the
Government
:: Surveys ::**

HE 401

94

945

1907

NATIONAL LIBRARY
CANADA
BIBLIOTHÈQUE NATIONALE

Foreword

At an approximate cost of \$750,000 exhaustive surveys for the Georgian Bay Canal have been made by the Dominion Government. There has also been issued a report of over 600 pages, accompanied by nearly 60 large lithographed maps, plans, etc., giving sites and particulars of proposed structures, the whole constituting one of the most important publications preliminary to construction of a public work hitherto made by the Canadian Government.

As the valuable information therein contained must under ordinary circumstances continue to be inaccessible to the great mass of the public, it has been thought advisable to arrange a few of the leading and more important facts in compact form for ready reference. The following pages are the result.

For purposes of comparison notes and an appendix have been added. These appear in black type.

The Georgian Bay Canal

Abstract of Leading Facts and Figures from the Report of the Government Surveys

CONCLUSIONS.

Cost of 22-ft. waterway for the largest lake boats, \$100,000,000.

Time of construction, 10 years.

Annual cost of maintenance, including operation of storage reservoirs for regulating flood waters of Ottawa River, \$900,000.

Distance from Montreal to Georgian Bay, 440 miles.

No international waters affected.

Season of navigation, 210 days.

Time required for passage of lake freight boat of 12-mile maximum speed, from Montreal to Georgian Bay, 70 hours.

Damages:—Reaches will be held at about ordinary high water level, and no extensive damages to farming districts will occur.

Waterpowers:—A reliable waterpower supply amounting to 1,000,000 H.P. will be secured.

The Georgian Bay Canal is essentially a river and lake canalization scheme, and utilizes natural waterways existing in practically a continuous line from Georgian Bay to Montreal.

A straight line through Montreal and Sault Ste. Marie has a direction almost due east and west, and follows closely the Ottawa River and Lake Nipissing waters, giving the most direct and shortest route from Lake Superior to a sea-port.

Of the distance of 440 miles of projected navigation between 410 and 420 miles follow the course of some lake or river. For the whole route the aggregate length of artificial waterways is astonishingly small, being estimated at 28 miles.

The project involves:—

The construction of 28 miles of artificial waterway.

The improvement by dredging or excavation of 80 miles of river and lake beds.

332 miles of natural waterway, wider than 300 feet and over 22 feet in depth require no improvement.

GENERAL CHARACTER AND DESCRIPTION OF ROUTE.

From Georgian Bay to the Ottawa watershed, 81 miles, the French River and Lake Nipissing are followed.

From Lake Nipissing through the height of land the route is an artificial waterway $3\frac{1}{2}$ miles in length.

This cut leads into Trout, Turtle and Talon Lakes, which form 21 miles of the route.

A canal of 3 miles from Lake Talon leads to the Mattawa River. After following the Mattawa to its mouth, a distance of 13 miles, a canal $\frac{1}{4}$ of a mile long gives entrance into the Ottawa River.

The Ottawa expands into large and deep lakes in many places, and is followed to the foot of Lake of the Two Mountains, a distance of 293 miles.

Entrance to the St. Lawrence may be either through Lake St. Louis or via the Back River.

THE OTTAWA RIVER.

Has a basin of 56,043 miles, and is 750 miles in length. Of the total area of the basin about four-fifths is drained by the northern, and about one-fifth by the southern tributaries.

The river is generally a series of deep and wide basins connected by restricted parts which are broken up by falls and heavy rapids.

The discharge of the Ottawa varies largely, but there are no sudden variations and the freshets come only once a year, always at about the same time.

The northern part of the Ottawa Valley is remarkable for the great number of its lakes, offering great possibilities for the storage of water.

An important feature of the project is the utilization on a large scale of these natural reservoirs to regulate the flow of the river to the great benefit not only of navigation, but of industries along the route.

The Ottawa is now navigated from Ottawa to the St. Lawrence River, the available depth of the canals at Grenville, Carillon and St. Anne's being about 7 feet.

The principal portion of the traffic, which in 1907 was 337,850 tons, consists of lumber in various forms. From 200 to 350 barges come up every year and carry from 30 to 50 million feet of lumber annually to Montreal, Lake Champlain, and other ports.

The country along the North Shore is rich in minerals. Important deposits of mica, felspar, apatite, graphite, etc., are found. Iron also occurs and has been mined to some extent. Granite and other quarries are worked with profit, and the extensive cement industry situated in Hull, Que., would be a heavy contributor of traffic.

Through navigation is interrupted by the Chaudière Falls at Ottawa, but several stretches above are navigable. These are the Deschenes Lake, Chats Lake, Lake Coulonge, Allumette Lake, and the stretch between Pembroke and Des Jouchims.

THE MATTAWA RIVER

rises in the chain of lakes known as Talon, Turtle and Trout, which form part of the waterway, is about 32 miles in length, and has a drainage basin of 880 square miles. The total fall from Trout Lake to the Ottawa River is 180 feet.

The portion of the river utilized for the waterway is 13 miles in length, including Lake Plain Chant, a body of water $5\frac{1}{2}$ miles long, very deep, lying between two ranges of hills which are very precipitous, and which is of sufficient width at any part at the present time for navigation purposes.

LAKE NIPISSING

Is a large body of uniformly shallow water having an area of about 320 square miles, and draining a basin of 4,077 square miles. The shores in many places are low, and it cannot be maintained much above high water level without flooding a considerable area. The extreme fluctuation of the lake is about 8 feet, and no difficulty is anticipated in regulating its level at any elevation near its high water stage.

THE FRENCH RIVER

Has a basin of 907 square miles, a high water discharge of 12,000 to 14,000 cubic feet per second, and an extreme low discharge of 3,000 cubic feet per second. From Lake Nipissing to Georgian Bay, a distance of 63 miles, the fall is 62 feet.

For the first twelve miles it has an average width of half a mile and a depth of 40 feet and over, and is often called the Southwest Arm of Lake Nipissing.

Its course is a succession of wide and deep expansions and narrows between high granite walls.

French River harbour has an average width of about 500 feet with a depth of about 30 feet. The Bustard Islands, 3 miles from the mouth of the harbour, offer good protection against southerly winds.

The Georgian Bay is remarkably free from fog, the average being not over four days in any month.

CHANNELS.

Minimum depth, 22 feet.

Least bottom width of submerged channels, 300 feet.

Least width of canal cuts, 200 feet.

The minimum depth of 22 feet will more than equal conditions in the channels governing the draft of boats on the Great Lakes, viz: St. Mary's River, St. Clair

Flats canal, and the Detroit River.

Taking into account $14\frac{1}{2}$ miles which after removal of obstructions will have free, wide channels, the route may be sub-divided as to width as follows:

Canal cuts, 200 to 300 feet wide, including necessary restrictions at locks.....	28 miles.
Improved channels, submerged sides, 300 feet wide	66 "
Free channels 300 to 1,000 feet wide and over	346 "
Total	440 miles.

(The description of the proposed waterway, as a "Canal" is a misnomer. The method of improvement proposed consists generally, of raising existing water-surfaces so as to form a series of 23 lake-like reaches of practically slack-water between Montreal and Georgian Bay confined by the natural river banks, and connected by locks. What is described as 20 miles of canal, consists chiefly of the locks themselves and their long approaches. Thus of the 346 miles of free channels over 240 miles will have a width of 1,000 feet and over.)

Sides of all submerged cuts will be shewn by piers at suitable distances. Along curves these piers will be provided with lights, and each different course will be defined by ranges.

Restricted channels are widened at all heads, and conditions for navigation in these restricted parts will be as good as on the St. Mary's, St. Clair and Detroit river channels.

The curves which occur in dredged portions are nearly all over a mile radius.

The St. Mary River, 50 miles long from the Soo down to Detroit on Lake Huron, has been navigated for years with extremely few accidents, by thousands of lake boats, meeting one another both day and night, in clear weather fogs and snow storms. The Ottawa channel is in all respects equal to this stretch.

LOCKS.

Will be 27 in number.

Minimum dimensions to be 650x65 feet and 22 feet deep.

Total lockage, 758 feet.

Rise from Montreal to Summit, 650 feet, to be overcome by 23 locks.

Descent from Summit to Georgian Bay, 98 feet, to be made by 4 locks.

(Locks on Welland and St. Lawrence route, 48; on Ottawa route, 27. Miles of canal, via Welland and St. Lawrence, $73\frac{1}{2}$; via Ottawa route, 20.)

To be constructed of concrete with long approach piers, generally extending 2,000 feet above and below each lock.

All locks will be on secure rock foundations, and can be built under the best possible conditions of safety and stability.

Steel gates have been designed for the canal by Mr. Henry Goldmark, C.E., who designed the gates for the Panama Canal.

For safety, duplicate pairs of gates are provided at both ends of the locks, and should a larger chamber be required occasionally a clear length of 707 feet would be available by leaving the inner pair of the lower gates open.

The locks as designed, however, will accommodate a lake freight steamer of modern type 600 feet long with 60 foot beam, carrying 12,000 tons on a draft of 20 feet, and having a capacity of 400,000 bushels of wheat, equivalent to 400 cars of 30 tons capacity each, or ten trains of 40 cars each.

Increased depth up to 26 feet can be secured temporarily by filling the reaches above ordinary working level and in case of emergency will pass boats of 24 to 25 foot draft.

All locks will be electrically operated and lighted, and electric lighting provided for lock approaches and restricted channels, as well as a complete system of telephone communication along the route and to the storage reservoirs. All operating plants to be duplex in every feature and so arranged as to allow of four combinations for operation in case of a breakdown of one of their parts.

Cost per cubic yard of the Georgian Bay Canal locks as designed will be less than one-third that of their prototypes at the Sault.

	Length of Canals.	No. of Locks.	Lockage.
Welland and St. Lawrence....	73.37	*49	552.2
Georgian Bay Canal	27.50	27	+758

(*Even if 7 locks of 47 feet lift each could be substituted for the present 28 locks on the Welland, there would be 33 locks on the St. Lawrence route as against 27 on the Georgian Bay Canal, or 25 if the Lake Nipissing summit level is adopted.)

+Lockage on the Georgian Bay Canal would be reduced to 700 feet by adoption of the Lake Nipissing summit.)

DAMS.

Total number, 45.

Rock-fill dams will be used on the Ottawa River section, a great advantage of this type of dam on a river of large flow, like the Ottawa, being its absolute safety under all conditions.

Where conservation of water is involved water-tight concrete dams are provided for.

Eighteen main dams will be required, all on rock foundations. The highest above low water level will be 25 feet.

Total height from bottom in deepest part of river to crest level, 80 feet.

The watershed tributary to the ship-canal furnishes ideal opportunities for effectual control for all portions of the river.

The French and Ottawa Rivers are generally a series of deep lake-like expansions separated by rapids and falls. The general system of improvement proposed is the construction of dams at the head of these rapids to retain the water at prescribed levels in the different reaches.

On the upper Ottawa the permanent improved level will be much above ordinary high water level, but in general the reaches will be maintained at about present high water level.

The spring flood in the Ottawa River can be restrained so that under extreme conditions the reaches will not overflow. Currents in the reaches will not be over 3 miles per hour, that is to say, practically slack water navigation will obtain throughout.

STORAGE RESERVOIRS AND FLOOD REGULATION.

The ideal waterway for safe and economical navigation has unrestricted channels of slack water.

The question of controlling the flow of the rivers utilized and thus creating a practically slack water navigation is therefore of vital importance, and is one of the necessary elements of the project.

The watershed tributary to the canal furnishes ideal opportunities for effectual control for all portions of the river.

Sufficient storage reservoirs have been located to control the flow at a stage at which it will create no currents dangerous to navigation.

Other reservoirs of large size are known to exist in the unsurveyed and unexplored territory. The determination whether these additional reservoirs are to be built or otherwise is one entirely of cost, each new reservoir reducing the cost of the locks and dams, but increasing the storage cost.

Storage reservoirs have been located as follows:—

Dam at foot of Lake Temiskaming, 240 miles above Ottawa, 1,100 feet long, will retain a reserve of water of 125 square miles in area and 8 feet in depth. Capacity, 27,878,400,000 cubic feet.

(This dam is now under construction.)

Gordon Creek and Kippewa Lake—


Area of reserve, 110 square miles, 6 feet in depth.

Capacity, 18,399,744,000 square feet.


Quinze Lake—

Area 96 square miles with depth of 5 feet.

Capacity, 13,381,632,000 cubic feet.

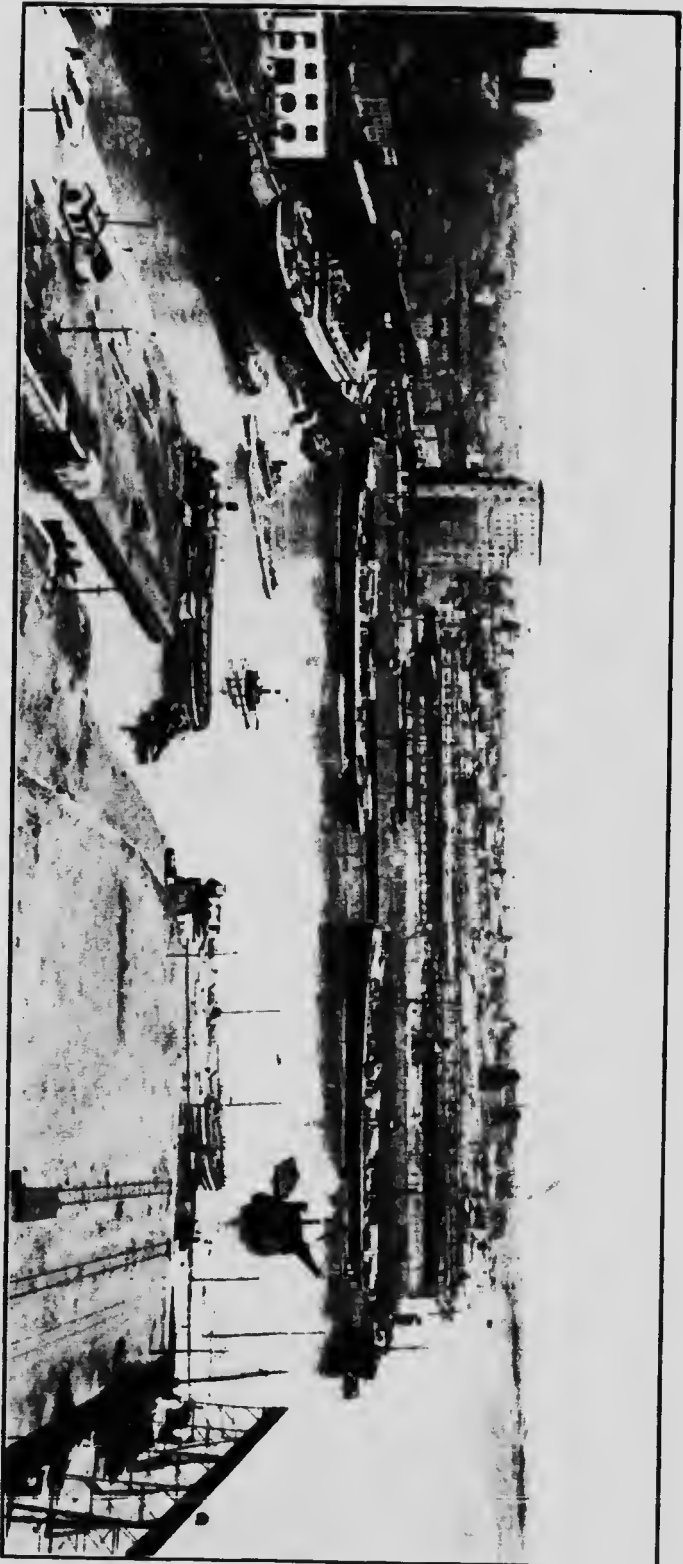

THE HARBOUR FRONT, MONTREAL
Eastern Terminus of proposed National Waterway the Georgian Bay Ship Canal

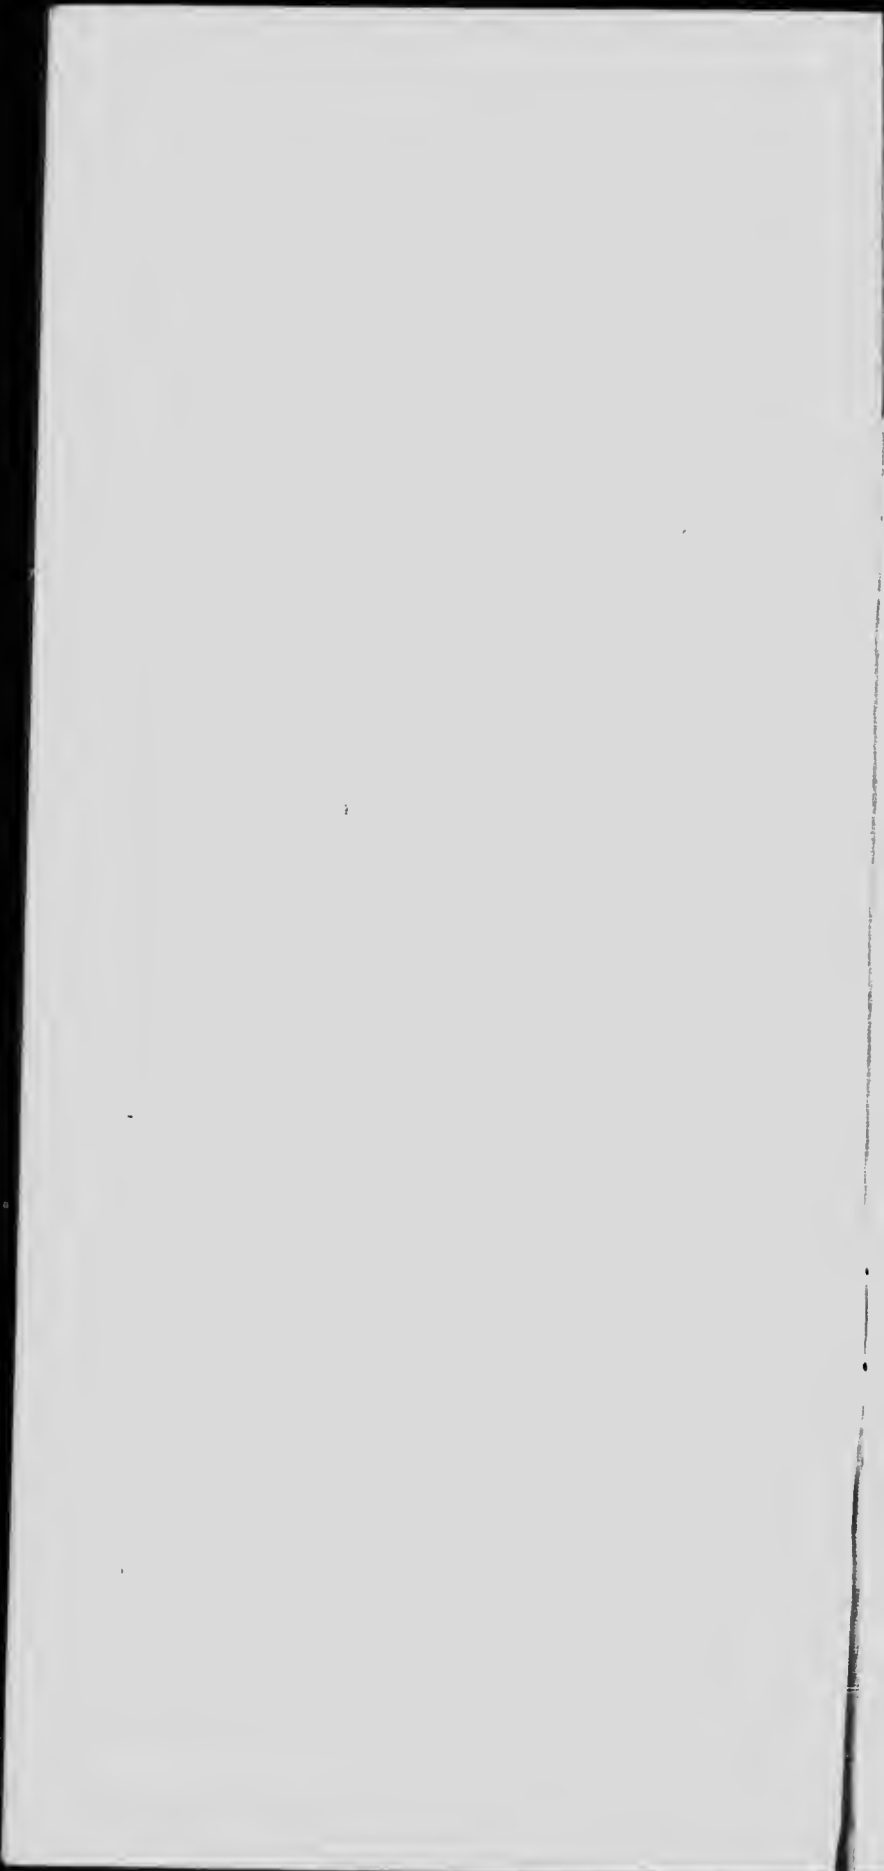

Barriere River—

Area 35 square miles with depth of 10 feet.

Capacity, 9,757,440,000 cubic feet.

Ottawa River above Lake Expanse—

Area 25 square miles, 10 feet deep.

Capacity, 6,969,600,000 cubic feet.

Askikwaj Lake—

Area 48 square miles, 10 feet deep.

Capacity, 23,603,712,000 cubic feet.

Grand Lake Victoria—

Area 150 square miles, 8 feet deep.

Capacity, 33,454,080,000 cubic feet.

Turn-Back Lake—

Area 48 square miles, 10 feet deep.

Capacity, 13,381,632,000 cubic feet.

Total capacity of proposed reserve dams on the Upper Ottawa, 146,828,240,000 cubic feet.

Total cost of reservoir system is estimated at \$2,000,000.

Advantages of storage of surplus waters will be:—


1. Reduction of flooded areas.
2. Great reduction in cost of construction.
3. Reduction of velocity of currents, and creation of practically slack-water navigation along the entire route.
4. Increase of efficiency of powers for industrial purpose.
5. By eliminating extreme high and low water will materially assist lumbering operations.
6. As low water level at St. Anne can be increased over 2 feet, this, it is estimated, would raise the low water level in Montreal Harbour one foot.

The advantages, aside from navigation, which will be gained by the proposed system of control of the Georgian Bay Canal route, would of themselves pay for the construction of a large part of it.

A prominent example of a reservoir system, much smaller than that proposed for the Ottawa, benefiting industries, is that of Minneapolis. In the reports of the United States Chief of Engineers it is stated that the reservoir system has already directly benefitted the milling industries of Minneapolis to the extent of \$500,000 annually, the production of flour by water-power amounting to 16,000,000 bbls. at less than one cent a barrel, which by steam would cost 5 cents.

SUMMIT LEVEL AND WATER SUPPLY.

The Summit Level of the proposed waterway extends from Lake Nipissing to the head of the Mattawa River, embracing Trout Lake, the Little Mattawa River, Turtle and Talon Lakes, a distance of about 25 miles.

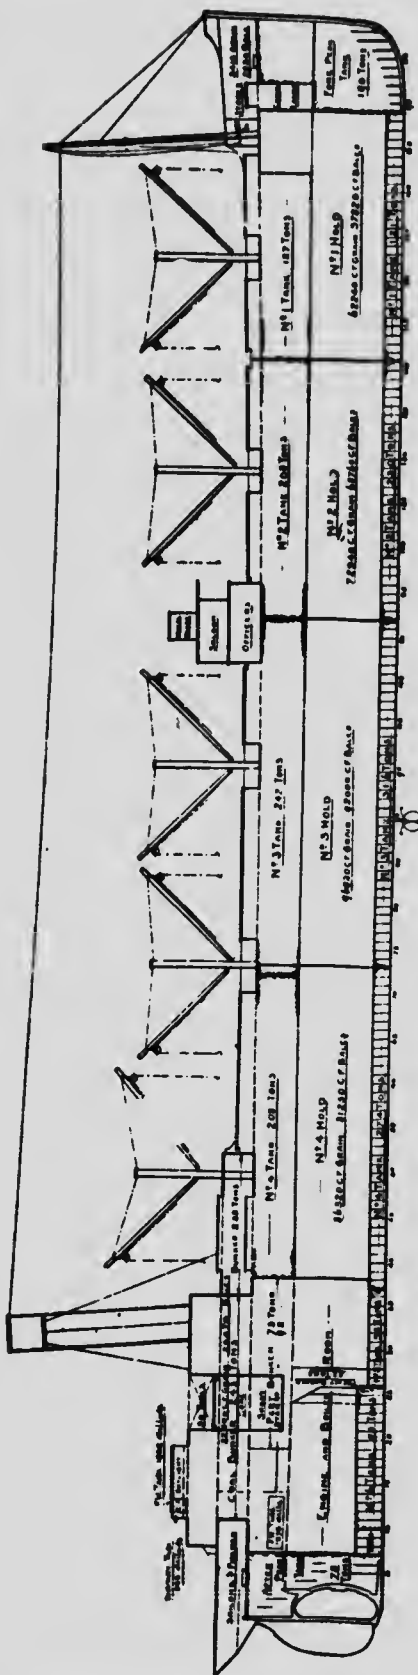

Plan of S. S. Fritzoe, specially built for carrying Nova Scotia coal on the St. Lawrence, and adapted to the trade through the proposed Georgian Bay Ship Canal

Length, 360 feet beam, 51 feet; capacity on 20 ft. draught, 5,500 tons—183,333 bushels of wheat—equivalent to 183 car-loads of 60,000 lbs. each; capacity of bunkers 715 tons; consumption of coal per day, 30 tons. Speed, loaded, 11 knots (12.65 miles) per hour. Time from Sydney to Fort William, 7 days and 9 hours.

The height of land proper separating the waters of the Great Lakes and those of the Ottawa River, occurs between Lake Nipissing and Trout Lake, the latter being the highest body of water on the route. The granite ridges forming the divide is in many places very little above the waters of Trout Lake.

The respective elevations of the summit lakes above sea level are:—

Lake Nipissing, mean level	640 feet.
Trout Lake "	663 "
Turtle Lake "	662 "
Talon Lake "	685 "

A summit level may be established by raising Trout, Turtle and Talon Lakes to elevation 677 feet, and lifting vessels from Lake Nipissing to that level by a lock.

This plan involves the determination of a sufficient water supply for operation of the locks.

With the adopted grade, the open stretches of the summit are singularly wide and deep, and will allow of full speed over almost its entire length.

The water available is more than sufficient to supply the summit, were the locks to be doubled, and each the size of the Canadian Ship Canal at Sault Ste. Marie.

With locks of the proposed size and lift, it is calculated that the average quantity of water required, based for the entire season on alternate lockages, east and west, will be 1,869,563 cubic feet per passage of the Summit, or 21.63 cubic feet per second, say 22 cubic feet.

In a minimum year of supply, 435 cubic feet at least are available from inflow and storage, representing practically 20 lockages a day, and a time interval of one hour, 12 minutes.

The expedient may be resorted to for the Summit locks of placing intermediate gates, and using a smaller chamber for locking small vessels, thereby saving a large quantity of water, and increasing the number of lockages to 25.

The limiting capacity of the waterway may be determined by assuming the time interval between lockages at a minimum, say 45 minutes, representing an average of 32 lockages per day.

During the period of deficient flow an additional 700 cubic feet per second can be obtained by diversion, at a cost of \$980,000, thereby meeting all demands of a maximum traffic.

(This additional supply gives a total of 1,135 cubic feet per second, representing 51 lockages a day. In 1907, when the traffic at the Sault amounted to 58,000,000 tons, the average number of lockages per day through the Poe lock was 24, and through the Canadian lock 19, or a total of 43 lockages per day for both locks. It will be seen, therefore, that an ample water supply for any possible traffic is fully assured.)

An alternative plan proposed for establishing a summit level is to lower Trout, Turtle and Talon Lakes to the high water level of Lake Nipissing, making elevation 648 the governing level.

(This plan makes the whole drainage basin of Lake Nipissing tributary to the summit, thus creating a summit reach 86 miles in length, absolutely ensuring the water supply for all time to come, decreasing the total lockage by 88 feet, and doing away with two locks, thereby reducing cost of maintenance and operation. On the other hand it adds considerably to cost of construction.)

TIME OF TRANSIT.

70 hours from Georgian Bay to Montreal.

1 to 1½ days faster than any other existing water route under present conditions from head of Great Lakes to ocean port, apart from also having an enormous superiority as to carrying capacity.

As there will be practically no current, boats should make equally as good time in the river reaches as in the dredged channels of the St. Mary's River, viz: 9 miles per hour and 6 miles per hour in canal.

(Many lake and river reaches will be navigated at full speed.)

LENGTH OF NAVIGATION SEASON.

Will be governed by opening and closing of navigation on Lake Nipissing and by conditions at the Summit and Mattawa River reaches.

Average dates of opening and closing of navigation and number of days open, 1880-1907.

	Opening.	Closing.	Days Open.
Sault Canals	Apr. 23	Dec. 9	230
French River Harbour	Apr. 26	Dec. 3	221
Lake Nipissing	Apr. 27	Dec. 4	221
Lower Ottawa Canals	Apr. 29	Nov. 29	214
Ste. Anne Lock	Apr. 25	Nov. 27	216
Lachine Canal	Apr. 30	Dec. 1	215

Average date of first arrival from sea, Montreal

Harbour, in last 21 years April 24

Average date of last departure for sea Nov. 25

Average days Montreal Harbour open for ocean navigation 215

In order to eliminate all possible chance of over-estimation, the navigation season on Lake Nipissing is reduced from 221 to 211 days, and this is assumed to be the length of time the waterway will be open for navigation, practically the same as the season for ocean navigation for the Harbour of Montreal, which governs the water-borne import and export trade through the St. Lawrence River route.

TIME OF CONSTRUCTION.

Careful analysis of the work to be performed shows that it would take from 3 to 5 years to develop all con-

tracts and place the whole route under active construction. Some of the sections where heavy submarine excavation is encountered would require five years to complete. It may be fairly stated therefore that a period of ten years from inception would be necessary to open the waterway to navigation. This would mean an average expenditure of about \$10,000,000 a year.

TIME OF PASSAGE OF LOCKS AND APPROACHES.

The Canadian lock at Sault Ste. Marie resembles more closely in all its features the type of lock and approaches designed for the Georgian Bay Canal than any other existing structure.

Comparison between them may be made as follows:—

Lock—	Depth on Sills.				
	Length Ft.	Width Ft.	Upper Ft.	Lower Ft.	Lift Ft.
Sault	900	60	22.2	20.3	18
Georgian Bay Canal..	650	65	22	22	10 to 50

Actual times of recorded passages at the Sault are as follows:—

Steamer	Reg. Tonnage Tons	Cargo Tons	Time of Lockage		Approaches		Av. Sp'd Miles per hr.
			Min.	Sec.	Distance Ft.	Time Min. Sec.	
TURNET CAPR	1142	Light	17	45	4530	6 30	7.9
JUNIATA	2619	1747	19	20	4530	2 5	6.3
H. S. HOLDEN	3091	7616	22	45	4680	19 25	3.3
J. H. BARTOW	5081	9500	32	45	6400	28 40	2.6
J. SELLWOOD.	5269	9000	45	40	4530	19 30	2.6

DISTANCES,

Chicago is 412 miles nearer to Montreal via the Georgian Bay Canal than to New York by the Erie Canal route, and 794 miles nearer to Liverpool than by the American waterway.

Duluth is 424 Miles nearer to Montreal by the Georgian Bay Canal than to New York by the Erie Canal route, and 806 miles nearer to Liverpool.

It is only 83 miles farther from Chicago to Montreal via the Georgian Bay Canal than from Chicago to Buffalo.

It is only 71 miles farther from Duluth and Fort William to Montreal via the Georgian Bay Canal than from the same ports to Buffalo.

From all ports on Lakes Huron, Michigan and Superior the Georgian Bay Canal route to Montreal is shorter than the St. Lawrence and Welland route, as shown by following comparative table.

Miles to Montreal from	Difference in		
	via. St. L. & Welland.	via. G.B. Canal.	favour of G. B. Canal.
Sarnia	675	677	...
Goderich	738	614	124
Kincardine	771	581	190
Southampton	798	554	244
Owen Sound	921	539	382
Collingwood	939	550	389
Midland	946	549	397
Victoria Harbour	947	550	397
Depot Harbour	922	515	407
Chicago	1,242	972	270
Sault Ste. Marie	943	661	282
Fort William	1,216	934	282
Duluth	1,338	1,056	282

ESTIMATES OF COST.

Summary.

1. Via Lake St. Louis route—	
Locks, dams, channels, piers, lighting, damages, etc.	\$38,626,108
Contingencies, engineering, etc., 10%..	8,862,892
Storage of flood waters, etc.	2,200,000
Total	\$99,689,000
2. Via Back River route—	
Locks, etc.	\$ 3,354,508
Contingencies, etc.	8,335,492
Storage, etc.	2,200,000
Total	\$93,890,000

Estimated reduction of cost by adopting Back
River route at Montreal.....\$5,797,000
Cost of feeder at Summit, when required... \$987,485
Locks 800 feet long and 75 feet wide would increase
the total cost by \$5,000,000.

Building all locks 24 feet deep so reaches might after-
wards be deepened, would add \$6,000,000 to the cost.

The adoption of the Lake Nipissing summit level,
while it would reduce the lockage by 50 feet and do
away with two locks and thus lessen cost of maintenance
and operation, is estimated to cost \$9,625,000 more than
the higher summit.

	Miles.	
Montreal	0— 5	\$3,859,000
Lake St. Louis	5— 25	12,553,000
Oka	25— 49	2,334,000
Pt. Fortune	49— 60	3,860,800
Ottawa	60—121	6,169,800
Hull	121—122	2,323,800
Aylmer	122—154	5,599,100

	Miles	
Arnprior	154—174	2,745,600
Portage du Fort	174—187	2,032,300
Rocher Fendu	187—190	481,800
Coulonge	190—209	3,940,400
Pembroke	209—265	4,400,200
Des Joachims	265—284	2,725,583
Rocher Capitaine	284—296	3,917,900
Deux Rivières	296—318	2,470,421
Mattawa	318—320	1,505,525
Plein Chant	320—326	1,453,592
Les Epines	326—331	1,379,940
Lower Paresseux	331—333	2,523,136
Summit	333—358	8,373,467
Nipissing	358—390	3,302,267
Five Mile Rapid	390—403	3,162,853
Pickereel River	403—442	6,511,624

Estimated cost of \$88,626,108

Locks	\$26,977,926	30%
Dams and regulation	6,057,533	7%
Channels	48,706,779	55%
Damages	6,883,870	8%

Total \$88,626,108

Details of Cost—

Rock excavation, submarine	\$23,982,780
Rock excavation, dry	19,587,750
Earth excavation, wet	2,140,073
Earth excavation, dry	3,223,690
Concrete and masonry	14,307,322
Rock and earth fill and bank lining..	5,663,254
Crib-work and timber	6,305,591
Stop-logs and machinery	1,849,680
Steel lock gates	2,610,106
Equipment and power	875,920
Unwatering	354,976

Quantities—

Total rock excavation, submarine.	8,322,554 c. yds.
Total rock excavation, dry.....	18,574,496 "
Total earth excavation, dry.....	10,836,537 "
Total earth excavation, dredging.	8,935,667 "
Concrete	1,901,957 "
Granite masonry	2,474 "
Rock fill	8,390,740 "
Bank lining	114,300 "
Earth fill	3,770,078 "
Crib work	1,910,102 "

Unit Prices—

- Excavation, \$1.00 and \$1.10 per cubic yard for rock.
- Excavation, 25 to 35 cents per cubic yard for loose material.
- Concrete, \$7.50 per cubic yard.

- Crib work, \$3 to \$3.50 per cubic yard.
- Structural Steel, \$120 per ton.
- Submarine Rock Excavation, \$3 to \$3.50 per cubic yard.
- Lining Banks with Stone, \$2 per cubic yard.
- Guide Cribs along Submerged Channels, \$3 per cubic yard.

MAINTENANCE AND OPERATION.

Operation of the canal will employ 24 lockmasters, 42 electricians, 102 lock motormen, 24 electric linemen, 198 boat linemen, 40 sluice attendants, 44 bridge motormen, 24 launches with 50 men for upkeep of lighting system, and about 200 men for operation of the storage reservoir system. Also 19 tugs and crews, 5 supply boats and crews, dredges, scows, floating repair shops, etc., and an engineering staff of chief engineer and 3 assistants, 3 division superintendents, chief electrician, master mechanic, clerk of works, draftsmen, and clerks.

SUMMARY.

Cost of Engineering Staff	\$38,900
Cost of Operating Staff at Locks	197,900
Cost of staff, light, sluice, and bridge tenders, etc.	70,400
Cost of Crews for Repair Outfits, etc.	186,250
Storage Reservoirs, Wages and Upkeep ..	90,000
Materials for Repair, Machinery, etc.	300,000
Operation and Repairs per year would then be as follows:	
Operation Canal proper	\$307,200
Operation Reservoir System	90,000
Repair Outfits, Materials, etc.....	486,250
	\$883,450 say \$900,000

WATERPOWERS:

The plans proposed create at least twelve large powers which consume the entire head of the Ottawa River from Mattawa to the Lake of the Two Mountains.

Development of the powers of the Ottawa River under present conditions, except for very large initial consumption, is practically impossible.

Upwards of 1,000,000 h.p. can be developed by the improved regulated conditions proposed for canal purposes. It is doubtful if more than 150,000 h.p. could be developed at present.

On the Ottawa River, even in its present condition, the force unused is enormous.

The construction of the canal will furnish one of the principal reasons for the development of the powers by giving cheap transportation both for the raw material and the finished product.

per

per

42

en,

cor-

ing

age

bly

ps,

3

n,

ra.

00

00

00

00

00

00

s



C.P.R.Y. AND C.N.R.Y. GRAIN ELEVATORS AND HARBOUR FRONTS OF FORT WILLIAM AND FORT ARTHUR
Western Terminus of the proposed National Waterway - the Georgian Bay Ship Canal

Their powers, by reason of the canal construction and the storage created at the head waters, form one of the chief features in the building of the canal, and would ultimately go a long way towards paying interest on the total cost of construction.

By the plans for the waterway, the flow with the proposed storage will be augmented at low water season, the number of available sites for powers increased, and dams constructed which are in themselves the most expensive part of the power development. But these dams are larger than a power company would undertake for development purposes only. Therefore it is clear that ultimately, owing to the construction work, the energy available will be from 15 to 20 times more valuable than it is now.

An annual rental of \$5 per h.p. would result in an eventual revenue of \$5,000,000 per annum.

North of the Island of Montreal, on the Back river route, there will be developed at two sites, 148,480 electrical h.p.

At Point Fortune, 50 miles from Montreal, there will be developed 148,000 electrical h.p.

At Hawkesbury, 60 miles from Montreal, 71,800 h.p.

At the Chaudiere, 127 miles from Montreal, 45,000 additional electrical h.p. will be available after the canal is constructed.

At the Chats Falls, 155 miles from Montreal, 113,500 h.p. will be available.

At Portage du Fort, 174 miles from Montreal, 68,300 h.p. will be developed.

At Rocher Fendu, 183 miles from Montreal, 78,000 h.p.

At Grand Calumet Falls, 56,000 h.p.


At Paquette, 209 miles from Montreal, 24,900 h.p.

At Des Joachims, 266 miles from Montreal, 60,400 h.p.

At Rocher Capitaine, 204 miles from Montreal, 82,000 h.p.

At Deux Rivieres, 296 miles from Montreal, 38,400 h.p.



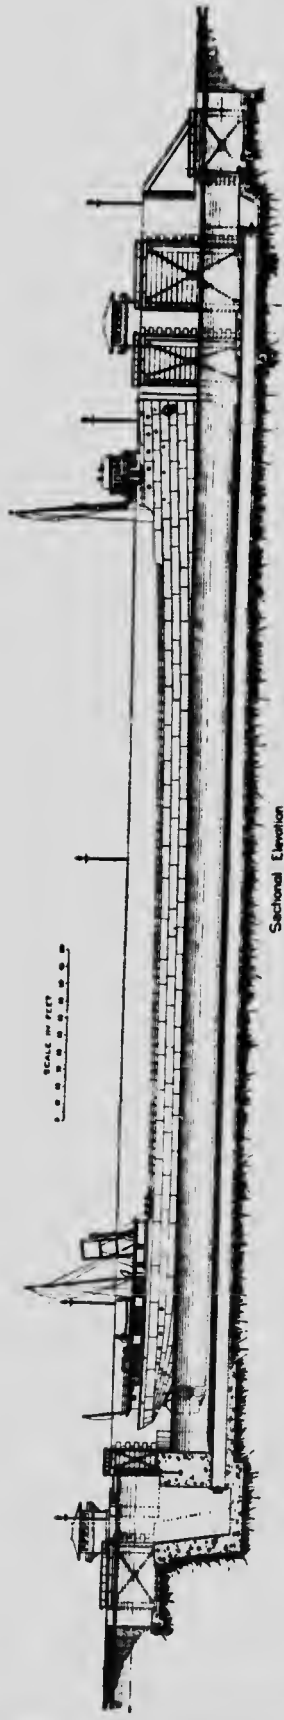

Plan showing modern type of Lake Freight Steamer in proposed Standard Canal Lock

Length of Steamer, 600 feet; beam, 60 feet; draught, 20 feet; capacity, 12,000 tons—400,000 bushels of wheat—equivalent to 400 cars of 60,000 lbs. capacity each, or 10 trains of 40 cars each. Speed up to 12 miles per hour. Georgian Bay to Montreal, 70 hours.

The following answers were given by Captain Norcross in charge of the Welvin fleet of Duluth, to questions submitted by the Department of Public Works:—

Q. What do you think of the future outlook of the Ottawa route?

A. If the round trip from Port Arthur to Montreal can be made in 15 days it will completely revolutionize the transportation trade. A rate of 2 cents per bushel would be given to Montreal.

Q. What do you consider the advantages of this route as against the St. Lawrence route, both on east and west bound traffic?

A. Grain can be carried from Port Arthur through the Georgian Bay Ship Canal route at about 2 cents per bushel. In comparison, it costs about $1\frac{1}{2}$ cents at an average freight rate to Port Colborne, add to this $\frac{1}{2}$ cent for transfer, than allow $2\frac{1}{2}$ cents freight to the 2,000 ton vessel which will have to carry it from Port Colborne to Montreal.

Captain Norcross further gives his views on transportation and rates as follows:

Taking wheat as a basis in 1905 the through sum of rate from the head of the Lakes to the sea-board via New York Central lines from Buffalo was five cents, and via canal from Buffalo, five and three-eighth cents. This is the lowest freight of the season. In the fall it went as high as ten cents via railroad lines, and ten and one-half cents via canal routes: the reason for the preferential in favour of the canal route was the assurance of no storage charges and the almost impossibility of securing cars from the railroad lines to deliver grain to the seaboard in time to make connections with the ocean sailings. These rates include all charges against the grain except when held in Buffalo in elevators for more than ten days, then the charge is one-quarter of a cent in addition for every ten days or portion thereof. I might say here that the shortage of cars at Buffalo in the fall of the year is a very great inconvenience to the shipper on account of his not being able to always make connections with his ocean space. This would be practically eliminated if the Georgian Bay Ship Canal route was in operation. If the Georgian Bay Ship Canal were completed and capable of accommodating our largest and most modern freighters, wheat could be delivered at Montreal for two and one-quarter cents per bushel. This would be allowing the steamer a very good margin of profit. If this canal is built according to the ideas suggested to me, by the engineers, it would be possible for a steamer to make the round trip from Port Arthur, returning without cargo in fifteen days, allowing four days to discharge at Montreal.

I am strongly of the opinion that should you construct the Georgian Bay Ship Canal, the grain would only be one of a number of the products that would be benefited. The advantages and conditions applying to grain would also apply to all through freights, east and west bound.

Appendix

For the purpose of comparison the following facts relating to the great ship canals of the world will be of interest.—

MANCHESTER SHIP CANAL

(River Mersey to Manchester.)

Length, 35½ miles.
 Depth—originally 29 feet, increased to 29 feet.
 Bottom width of channel, 129 feet.
 Locks, 5 in number, general dimensions being: for small locks, 359 x 45 feet, for large locks 900 x 45 feet.
 Cost—£17,599,230—\$35,527,495.
 Opened for traffic, January 1st, 1894.
 Traffic and Revenue:

	Tons.	
1894	925,500	\$475,793
1897	2,995,915	994,937
1899	3,069,519	1,413,433
1903	3,949,995	1,929,646
1905	4,253,354	2,194,253
1907	5,219,759	2,692,943



SUEZ CANAL

(Red Sea to Mediterranean Sea.)

Length, 99 miles.
 Depth—originally 25 feet, increased in 1906 to 31 feet.
 Channel's bottom width 199 feet, surface width 429 feet.
 Cost, slightly over \$199,900,000.
 Opened for traffic in 1869.
 Traffic and Revenue:

	Tons.	
1882	7,122,125	\$12,325,929
1892	19,999,461	14,473,551
1932	15,994,359	29,164,399
1967	29,553,241	22,559,439



KIEL CANAL (Kaiser Wilhelm)

(North Sea to Baltic Sea.)

Length, 91 miles.
 Depth, 29½ feet.
 Cost, \$49,000,000.
 Opened for traffic June 19, 1905.
 Traffic and Revenue:

	Tons.	
1900-01	4,262,259	\$597,930
1904-05	4,984,979	547,469
1936-07	5,963,125	714,999



CRONSTADT CANAL

Connecting the Bay of Cronstadt with St. Petersburg is a work of great strategic and commercial importance to Russia.

Depth, 21 feet.
 Opened for traffic, 1896.
 Cost, about \$19,000,000.
 Traffic and Revenue, no data available.

Appendix

SAULT STE. MARIE CANALS

(Between Lake Superior and Lake Huron.)

Weltzel Lock, 515 feet long, 38 feet wide, and 17 feet deep.
Opened 1881.

Poe Lock, 808 feet long, 108 feet wide, nominal depth 22 feet.
Opened 1886.


Canadian Lock, 808 feet long, 80 feet wide, nominal depth, 22 feet.
Opened 1886.

Aggregate cost of United States and Canadian Locks to date, about
\$11,000,000.


Revenue: None, free of tolls.

	Tons.
Traffic 1881	1,567,714
1887	5,494,649
1887	13,832,756
1907	51,217,214



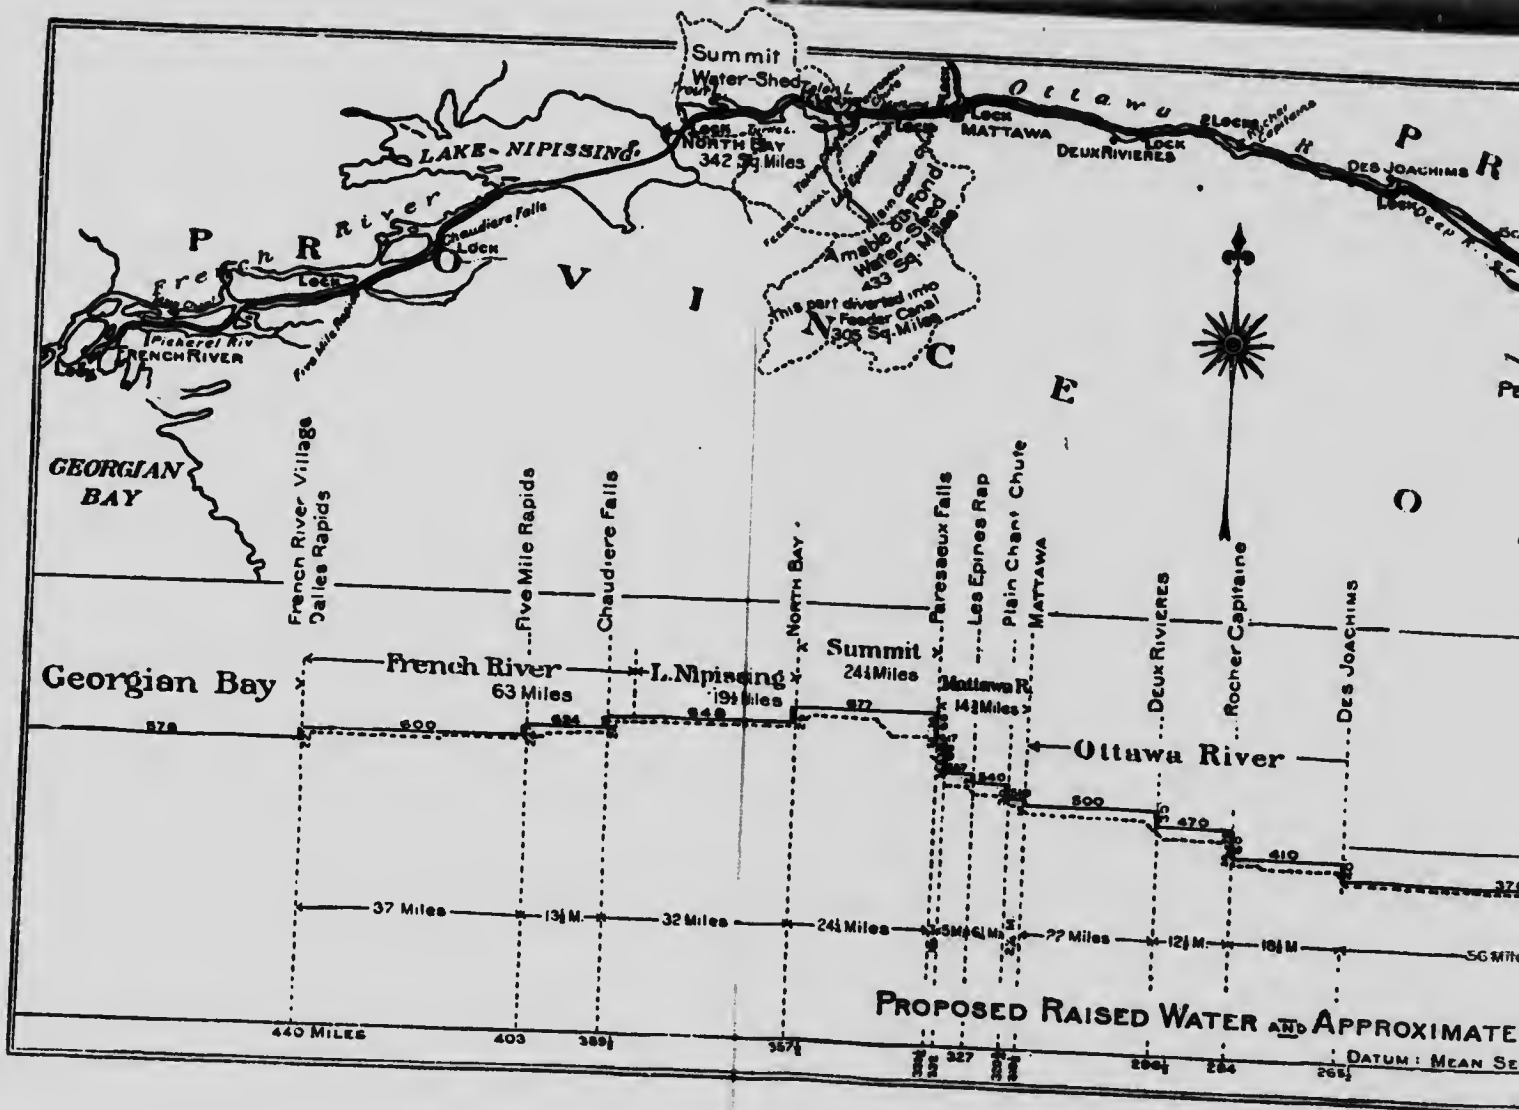

DEPARTMENT OF PUBLIC WORKS, CANADA
PROPOSED GEORGIAN BAY SHIP CANAL ROUTE

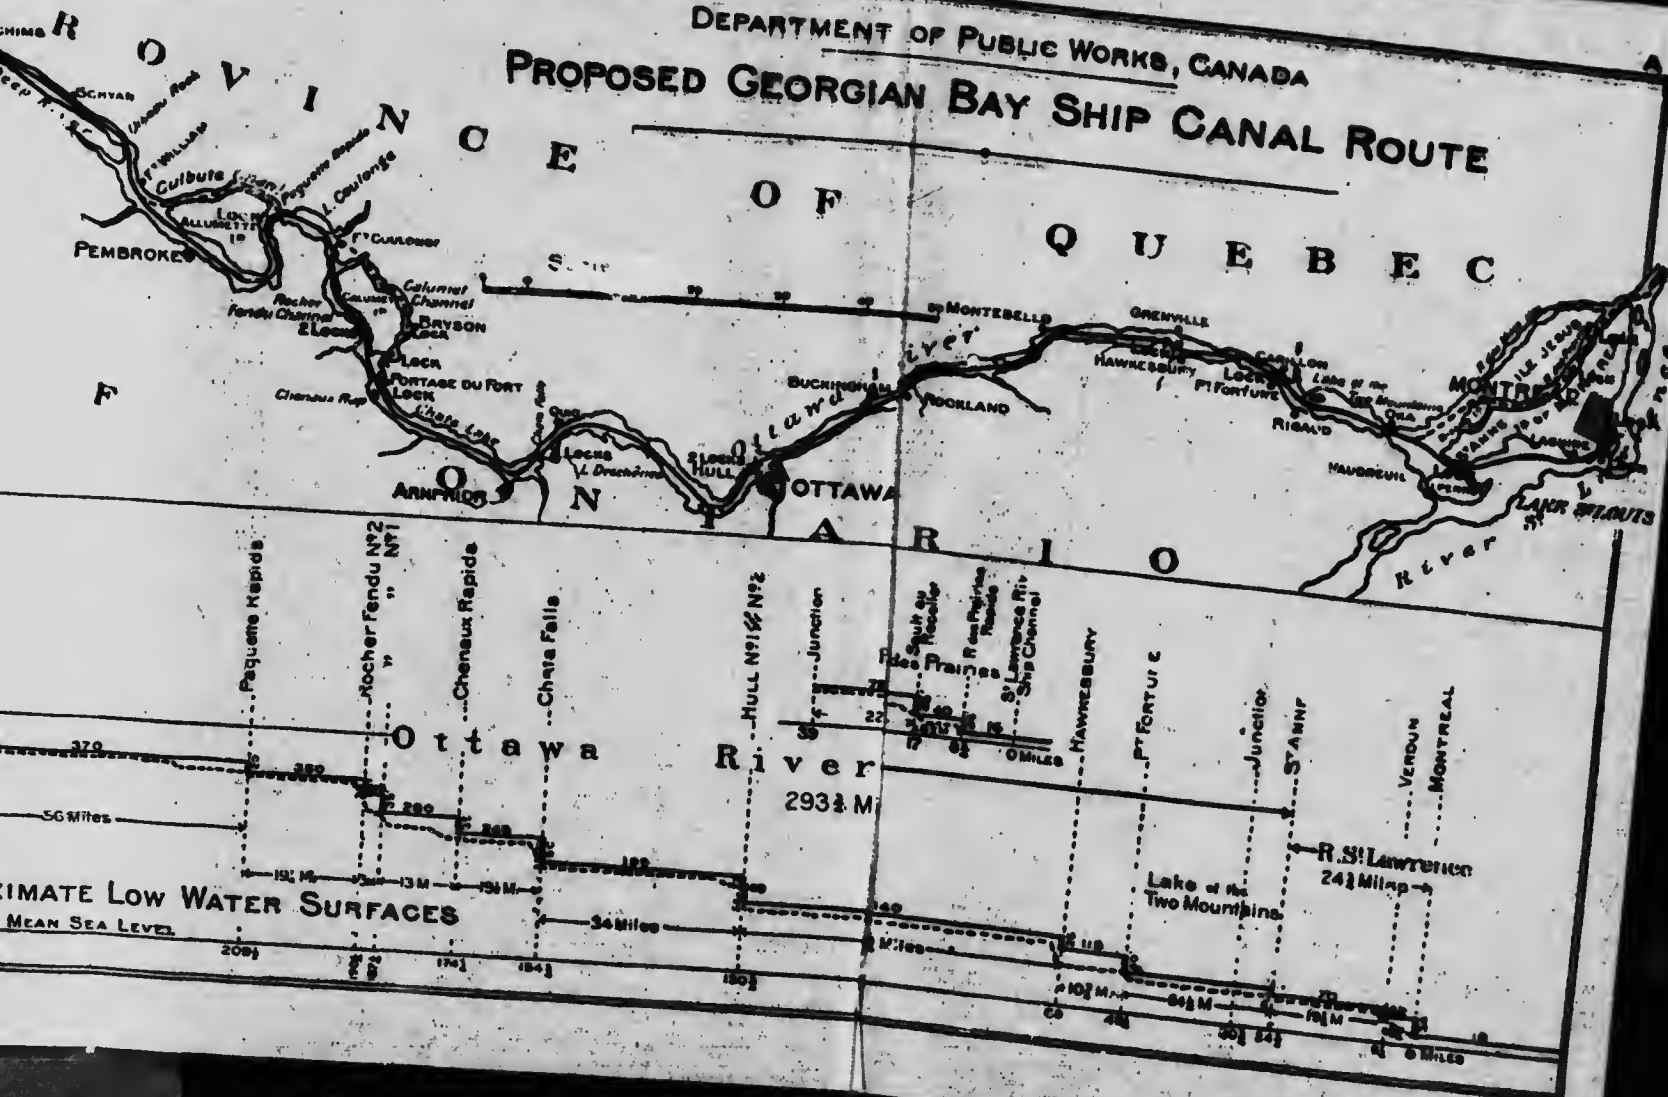

APPROXIMATE LOW WATER SURFACES
 MEAN SEA LEVEL







