
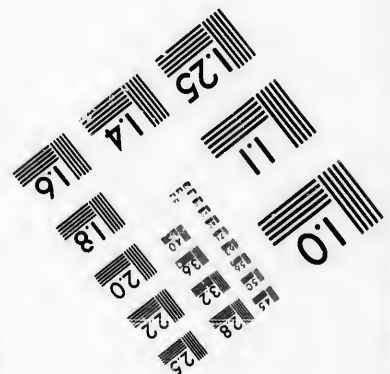
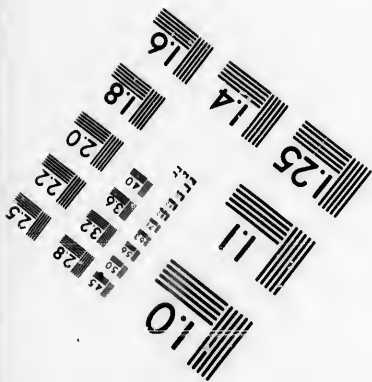



**IMAGE EVALUATION  
TEST TARGET (MT-3)**



**Photographic  
Sciences  
Corporation**

23 WEST MAIN STREET  
WEBSTER, N. Y. 14580  
(716) 872-4503

**CIHM/ICMH  
Microfiche  
Series.**

**CIHM/ICMH  
Collection de  
microfiches.**



**Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques**

**© 1986**

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- |  |  |
|--|--|
| <input type="checkbox"/> Coloured covers/<br>Couverture de couleur   | <input type="checkbox"/> Coloured pages/<br>Pages de couleur   |
| <input type="checkbox"/> Covers damaged/<br>Couverture endommagée  | <input type="checkbox"/> Pages damaged/<br>Pages endommagées   |
| <input type="checkbox"/> Covers restored and/or laminated/<br>Couverture restaurée et/ou pelliculée  | <input type="checkbox"/> Pages restored and/or laminated/<br>Pages restaurées et/ou pelliculées  |
| <input type="checkbox"/> Cover title missing/<br>Le titre de couverture manque   | <input checked="" type="checkbox"/> Pages discoloured, stained or foxed/<br>Pages décolorées, tachetées ou piquées   |
| <input type="checkbox"/> Coloured maps/<br>Cartes géographiques en couleur   | <input type="checkbox"/> Pages detached/<br>Pages détachées  |
| <input type="checkbox"/> Coloured ink (i.e. other than blue or black)/<br>Encre de couleur (i.e. autre que bleue ou noire)   | <input checked="" type="checkbox"/> Showthrough/<br>Transparence   |
| <input type="checkbox"/> Coloured plates and/or illustrations/<br>Planches et/ou illustrations en couleur  | <input type="checkbox"/> Quality of print varies/<br>Qualité inégale de l'impression   |
| <input type="checkbox"/> Bound with other material/<br>Relié avec d'autres documents   | <input type="checkbox"/> Includes supplementary material/<br>Comprend du matériel supplémentaire   |
| <input type="checkbox"/> Tight binding may cause shadows or distortion<br>along interior margin/<br>La reliure serrée peut causer de l'ombre ou de la<br>distorsion le long de la marge intérieure   | <input type="checkbox"/> Only edition available/<br>Seule édition disponible   |
| <input type="checkbox"/> Blank leaves added during restoration may<br>appear within the text. Whenever possible, these<br>have been omitted from filming/<br>Il se peut que certaines pages blanches ajoutées<br>lors d'une restauration apparaissent dans le texte,<br>mais, lorsque cela était possible, ces pages n'ont<br>pas été filmées. | <input type="checkbox"/> Pages wholly or partially obscured by errata<br>slips, tissues, etc., have been refilmed to<br>ensure the best possible image/<br>Les pages totalement ou partiellement<br>obscurcies par un feuillet d'errata, une pelure,<br>etc., ont été filmées à nouveau de façon à<br>obtenir la meilleure image possible. |
| <input type="checkbox"/> Additional comments:<br>Commentaires supplémentaires:   |  |

This item is filmed at the reduction ratio checked below/  
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	12X	14X	16X	18X	20X	22X	24X	26X	28X	30X	32X
						✓					

The copy filmed here has been reproduced thanks to the generosity of:



Library of the Public  
Archives of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol  $\rightarrow$  (meaning "CONTINUED"), or the symbol  $\nabla$  (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

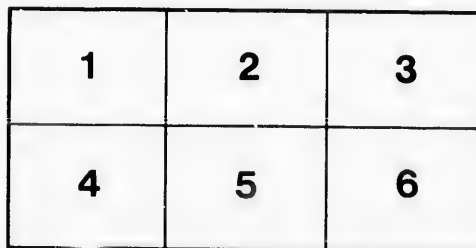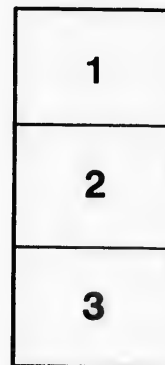

L'exemplaire filmé fut reproduit grâce à la générosité de:

La bibliothèque des Archives  
publiques du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole  $\rightarrow$  signifie "A SUIVRE", le symbole  $\nabla$  signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

Please read and send in as  
full a discussion as possible at  
earliest date.

Dec. 13/99.

P. M. Lovelace.

Canadian Society of Civil Engineers.

INCORPORATED 1887.

**ADVANCE PROOF**—(Subject to revision)

N.B.—This Society, as a body, does not hold itself responsible for the  
statements and opinions advanced in any of its publications.

TRANSITION CURVES.

BY

E. S. M. LOVELACE, B.A.Sc., A.M., Can. Soc. C. E.

(To be read Thursday, December 7th, 1899.)

Some years ago the writer published a pamphlet on the "Lemniscata as a Transition Curve," a copy of which is in the possession of the Society. The pamphlet was rather favorably reviewed in the "Railroad Gazette," June 30th, 1893, and in "Engineering News," November 2nd of the same year, and as a result a good many copies were sold to engineers in different parts of the United States.

As was indicated, however, in the articles in the above-mentioned journals, and as the writer himself realized shortly after the book was printed, the tables given in it were not sufficiently extensive, while the general formulæ giving the elements of the proposed curve were perhaps a little too complicated to lend themselves readily to work in the field, and consequently the pamphlet was not as successful as had been confidently hoped it would be. Before laying before the Society the modified set of formulæ which the writer now proposes to use, it may be of interest to look at the simple way in which those given in the pamphlet might have been written, but which unfortunately was not discovered until too late.

Referring to the accompanying diagram and calling

the distance measured along chord A P	== C
the distance measured along curve A S P	== S
the offset distance H V	== K
the radius of main curve O P	== R
the deflection angle P A N	== $\theta$

the formulæ given in pamphlet are as follows:—

$$(1) \sin 2\theta = \frac{C}{3R}$$



$$(2)'' AH = \frac{c}{2} \left( \frac{2 + \cos 2\theta}{\cos \theta} \right)$$

$$(3)'' OH = \frac{c}{6} \left( \frac{2 - \cos 2\theta}{\sin \theta} \right)$$

$$(4)'' AB = OH \tan \frac{I}{2} + AH$$

$$(5)'' s = c + \frac{c^3}{90 R^2} + \frac{c^3}{1944 R^4}$$

In place of the above write:—

$$(1)' \sin 2\theta = \frac{c}{3R}$$

$$(2)' AH = \frac{R}{2} (3 \sin \theta + \sin 3\theta)$$

$$(3)' OH = \frac{R}{2} (3 \cos \theta - \cos 3\theta)$$

$$(4)' AB = \frac{R}{2} \sec \frac{I}{2} \left[ 3 \sin \left( \frac{I}{2} + \theta \right) - \sin \left( \frac{I}{2} - 3\theta \right) \right]$$

$$(5)' s = \frac{c}{1 - \frac{2}{5} \theta^2} = c + \frac{20}{3} \frac{k^2}{c}$$

$$(6)' \text{ deflection to point distant } l \text{ along curve from } A = \frac{\theta l^2}{s^2}$$

Equation (4) is the first expression giving the value of A B in one simple formula, which the writer has seen. It can be used to special advantage when the curves of an existing track are to be eased off in such a manner that the total length of the track remains the same, and, so, no rails will have to be cut. To insure this, looking at Fig. it will be necessary that:

$$R' \frac{I}{2} + \left[ AB - R' \tan \frac{I}{2} \right] = S + R \left( \frac{I}{2} - 3\theta \right)$$

where  $R'$  = radius of existing track

$$\text{that is } R' \left( \frac{I}{2} - \tan \frac{I}{2} \right) = s - AB + R \left( \frac{I}{2} - 3\theta \right)$$

substituting for S and A B, their values given by (5)' and (6)'.

$$R = \frac{R' \left( \frac{I}{2} - \tan \frac{I}{2} \right)}{\frac{3 \sin 2\theta}{1 - \frac{2}{5} \theta^2} - \frac{I}{2} \sec \frac{I}{2} \left[ 3 \sin \left( \frac{I}{2} + \theta \right) - \sin \left( \frac{I}{2} - 3\theta \right) \right] + \left[ \frac{I}{2} - 3\theta \right]}$$

finally, assume a convenient value for  $\theta$  and solve for R.

While this is rather a formidable looking equation to work out,

it can easily be seen that the 1st and 2nd quantities in the denominator multiplied by R at once give S and A B, so that nearly everything for the subsequent laying out of the curves is found by the one calculation.

In the spring of 1894 the writer in a letter to the "Editor Engineering News" suggested that the above might be an improvement on those given in the pamphlet, and received a reply from the late Mr. A. M. Wellington which is interesting as showing the strong practical grasp he had of all engineering subjects. He states in his letter: "I thought at first you had this simplified into an acceptable form, and you will see intended to publish it, but I fear it is still too complex to make it suitable to lay before engineers as a practicable and practical method. A suggestion! Forget the lemniscata or any other particular curve—Assume a curve in which ASP and HV bisect each other NA P =  $\theta$  TPA =  $2\theta$  and VP P'V' is the original main curve of any length whatever, and you have something that can be called general and proper. Then assume your curve V V' already run, and HV to be assumed at discretion, and work out all the other elements for laying out the curve either by homologous offsets from tangents and main curve, or by angles from P or A. All this is simple. I have done it and used it, but I have no time to put it in shape. Do it, and you will do a good work. Less won't do—too complex for no gain.

Signed, A. M. WELLINGTON.

The writer has tried to work out a curve using the assumptions suggested by Mr. Wellington, but has not on the whole succeeded in obtaining as simple a set of formulae as may be derived from those numbered (1)' to (6)', and which may therefore fairly be called formulae for *modified Lemniscata*.

Looking at equation (1)' and remembering that  $2\theta$  is always a little greater than  $\sin 2\theta$  and S a little greater than C, within the limits over which  $\theta$  will likely range, the curve represented by (1)' will be very slightly altered by writing:

$$2\theta = \frac{s}{3R} \quad \text{or} \quad \theta = \frac{s}{6R} \quad (a)$$

$$\text{By equation (3)' } OH = R + K = \frac{R}{2} (3 \cos \theta - \cos 3\theta)$$

expanding  $\cos \theta$  and  $\cos 3\theta$  into a series it will be found that

$$K = \frac{3}{2} R (\theta^2 - \theta^4),$$

as K for modified will always be slightly greater than K for true Lemniscata  $\theta^4$  can be discarded and therefore

$$\theta^2 = \frac{2K}{3R} \quad \text{or} \quad \theta = \sqrt{\frac{2K}{3R}} \quad (b)$$



combine (a) and (3)  $\therefore K = \frac{s^2}{24 R}$  (c)

combine (a) and (c)  $\therefore \theta = \frac{4 K}{s}$  (d)

By (5)  $c = s - \frac{2}{5} s \theta^2 = s - \frac{2}{5} s \frac{16 K^2}{s^2} = s - \frac{32}{5} \frac{K^2}{s}$  (e)

Looking at diagram  $\therefore AH = c \cos \theta - R \sin 3 \theta$

$$= c \left( 1 - \frac{\theta^2}{2} \right) - R \left( 3 \theta - \frac{9}{2} \theta^3 \right)$$

$$= c \left( 1 - \frac{8 K^2}{s^2} \right) - \frac{s}{2} + 12 \frac{K^2}{s} \text{ by (a) and (d)}$$

$$= c - \frac{8 K^2}{s} - \frac{s}{2} + 12 \frac{K^2}{s^2} \text{ very nearly.}$$

$$= s - \frac{32}{5} \frac{K^2}{s} - \frac{8 K^2}{s} - \frac{s}{2} + \frac{12 K^2}{s^2} \text{ by (e)}$$

$$\therefore AH = \frac{s}{2} - \frac{5}{2} \frac{K^2}{s} \text{ (f)}$$

Equation (a) may be written

$$\frac{\theta}{60,5730} = \frac{s}{6 \frac{5730}{D}}$$

where  $\theta$  is the number of minutes contained in the angle, and  $D = \frac{5730}{R}$

That is  $\theta$  in minutes  $= \frac{S D}{10}$  a very important formulae, and the

one that would likely generally be used in calculating  $\theta$ .

The complete set of formulae for modified lemniscata are therefore:

$$(1) K = \frac{s^2}{24 R}$$

$$(2) \theta = \frac{s}{6 R} = \frac{4 K}{s} = \sqrt{\frac{2 K}{3 R}}$$

$$(3) \theta \text{ in minutes} = \frac{s D}{10} \text{ where } D = \frac{5730}{R}$$

$$(4) AH = \frac{s}{2} - \frac{5}{2} \frac{K^2}{s}$$

$$(5) c = s - \frac{32}{5} \frac{K^2}{s}$$

$$(6) \text{ deflection to point distant } l \text{ from } A = \theta \frac{l^2}{s^2} = \theta'$$

$$\text{do} \quad \text{do} \quad 2l \quad \text{do} = 4\theta \frac{l^2}{s^2} = 4\theta'$$

$$\text{do} \quad \text{do} \quad nl \quad \text{do} = n^2 \theta \frac{l^2}{s^2} = n^2 \theta'$$

Each of the above equations contains three unknown quantities, any two of which may be assumed at will, so that the curve is extremely flexible and can be made to fulfil almost any conditions.

The correction  $\left(\frac{5}{2} \frac{K^2}{s}\right)$  for the distance AH given in equation (4) need only be used when K is fairly large. It is the want of such a correction that has caused trouble (in the case of high degrees of curve) when the otherwise admirable method (first made known to the Society by Mr. Wicksteed) is used.

The accuracy of the above formulæ can best be illustrated by an example taken at random.

$$\text{Let } I = 102^\circ - 0'$$

$$\text{" } R = 410.65 \text{ corresponding to about a } 14^\circ \text{ curve}$$

$$\text{" } K = 27$$

$$\text{by (1) } s^2 = 24 KR$$

$$\therefore 2 \log s = \log 24 + \log K + \log R \quad \therefore s = 515.85$$

$$\therefore \log s = 2.7125244$$

$$\text{by equation (3) } O' = \frac{SD}{10} = \frac{515.85}{10} = \frac{5729.58}{410.65}$$

$$\therefore \log O' = \log s + \log 5729.58 - \log 4106.5$$

$$\therefore \log O' = 2.8571733$$

$$\therefore \theta = 719.736 \text{ minutes} = 11^\circ 59' 44''$$

$$\frac{K^2}{s} = \frac{27^2}{515.85} = 1.413$$

$$\therefore \text{by (4) } AH = \frac{s}{2} - \frac{5}{2} \frac{K^2}{s} = 257.925 - 3.533 = 254.39$$

$$\text{by (5) } AP = s - \frac{32}{5} \frac{K^2}{s} = 515.85 - 9.04 = 506.81$$

$$AB = (R + K) \tan \frac{I}{2} + AH$$

$$= 437.65 \tan 51^\circ + 254.39 = 794.85$$

$$\text{now } AA' = 2 AB \cos \frac{I}{2} = 2, 794.85 \cos 51^\circ = 1000.43$$

$$\begin{aligned} \text{but } AA' \text{ should also} &= 2 (AP (\cos 51^\circ - 0) + R \sin \left( \frac{I}{2} - 3\theta \right)) \\ &= 2 (506.81 \cos 39^\circ 0' 16'' + 410.65 \sin 15^\circ 0' 48'') \\ &= 2 (393.84 + 106.38) \\ &= 1000.44 \end{aligned}$$

proving that all the equations given above are almost exactly right, and that if chained correctly the curves would close precisely.

In conclusion the writer would draw attention to a rather peculiar coincidence in connection with the curve represented by the above formulae.

As already mentioned, a short review of the writer's pamphlet was given in "The Railroad Gazette," June 30th, 1893, while in the same journal's issue of August 4th, 1893, there appeared an article entitled: "A New Transition Curve,—The Lemniscata," by Charles H. Tutton, Dept. Public Works, Bureau of Engineering, Buffalo, N.Y.

Mr. Tutton was unaware that anything had been contributed on this curve prior to his paper on the subject, but, hearing in November of the same year that such was not the case, at once wrote, enclosing his own article and asking for the writer's in exchange.

In his letter acknowledging receipt of this, Mr. Tutton gives some very interesting information in connection with his own work in the matter.

He states: "I investigated the curve several years ago, and wrote quite a letter to Prof. Jamieson over two years ago on it, immediately following his series of articles on the Cubic Parabola in the "American Engineer and Railroad Journal."

Its investigation started from Prof. Airy's article in vol. 1 of Van Nostrand's Magazine for 1867, when a set of tables for the Cubic Parabola were given.

The close approximation of the deflections to an arithmetical progression at once struck me, and for a time I worked on the idea of developing a curve whose equation could be written  $2 K \theta = S^2$  where  $K =$  some constant, or in plain English one whose deflection angles from the main tangent were in direct arithmetical progression for equal distances chained along the curve. This curve comes *very close* to the lemniscata, but I have never been able to throw it into what you would term usable shape. Another curve that promised very fair results could be written  $2 K \tan \theta = s^2$  and can be plotted by laying off the tangents of the angles in arithmetical progression for equal arcs.

"I think, altogether, the lemniscata is the preferable curve for field use to any that I know of. I have seen handbooks on transition curves alone that were larger than the entire field book (Hence for instance) usually carried by the engineer, and my experience is that while in the multitude of counsellors there may be safety, yet in the multitude of tables there is a decided chance of error, increasing in rather more than arithmetical progression."

After making some further comparisons Mr. Tutton concludes: "I am busier now on sewers and pavements than on track problems, but if you have leisure I have an idea that the development of the curve  $2K\theta = S^2$  might prove interesting, as it is flatter at the beginning and sharper at the centre than the lemniscata."

The coincidence the writer spoke of consists in the fact that the curve represented by the above equation is identical with that dealt with in this paper, and called for want of a better name the "modified Lemniscata." Thus, Mr. Tutton's foresight in the matter has been, in the writer's opinion, amply justified.

That the two curves are one and the same can easily be seen for calling the deflection angle to a point on curve  $\theta$ , and the deflection angle to the point where transition joins main curve  $\theta'$  the corresponding distances along curve being  $S$  and  $S'$ .

$$\text{by (6) } \theta = \frac{0' s^2}{2S^2}$$

$$\therefore s^2 = \frac{S^2 \theta}{0'} \quad \theta = 2K\theta \quad \text{where } 2K = \frac{S'^2}{0'}$$

The writer has not touched upon the question of the actual laying out the curves in the field, for the reason that this has been very fully entered into by Mr. Wicksteed and others, whose methods and conclusions apply also to the curve which the writer has attempted to describe.

The only contribution, therefore, that the writer has to offer to the Society is a complete set of properly tabulated general formulae, which will ensure the transition and main curves closing under any and all conditions.

