

**CIHM  
Microfiche  
Series  
(Monographs)**

**ICMH  
Collection de  
microfiches  
(monographies)**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

**© 1997**

The In  
copy a  
may b  
the in  
signifi  
checke



This ite  
Ce doc

10x



## Technical and Bibliographic Notes / Notes techniques et bibliographiques


The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming are checked below.

- Coloured covers / Couverture de couleur
- Covers damaged / Couverture endommagée
- Covers restored and/or laminated / Couverture restaurée et/ou pelliculée
- Cover title missing / Le titre de couverture manque
- Coloured maps / Cartes géographiques en couleur
- Coloured ink (i.e. other than blue or black) / Encre de couleur (i.e. autre que bleue ou noire)
- Coloured plates and/or illustrations / Planches et/ou illustrations en couleur
- Bound with other material / Relié avec d'autres documents
- Only edition available / Seule édition disponible
- Tight binding may cause shadows or distortion along interior margin / La reliure serrée peut causer de l'ombre ou de la distorsion le long de la marge intérieure.
- Blank leaves added during restorations may appear within the text. Whenever possible, these have been omitted from filming / Il se peut que certaines pages blanches ajoutées lors d'une restauration apparaissent dans le texte, mais, lorsque cela était possible, ces pages n'ont pas été filmées.
- Additional comments / Commentaires supplémentaires: **Various pagings.**

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- Coloured pages / Pages de couleur
- Pages damaged / Pages endommagées
- Pages restored and/or laminated / Pages restaurées et/ou pelliculées
- Pages discoloured, stained or foxed / Pages décolorées, tachetées ou piquées
- Pages detached / Pages détachées
- Showthrough / Transparence
- Quality of print varies / Qualité inégale de l'impression
- Includes supplementary material / Comprend du matériel supplémentaire
- Pages wholly or partially obscured by errata slips, tissues, etc., have been refilmed to ensure the best possible image / Les pages totalement ou partiellement obscurcies par un feuillet d'errata, une pelure, etc., ont été filmées à nouveau de façon à obtenir la meilleure image possible.
- Opposing pages with varying colouration or discolourations are filmed twice to ensure the best possible image / Les pages s'opposant ayant des colorations variables ou des décolorations sont filmées deux fois afin d'obtenir la meilleure image possible.

This item is filmed at the reduction ratio checked below / Ce document est filmé au taux de réduction indiqué ci-dessous.

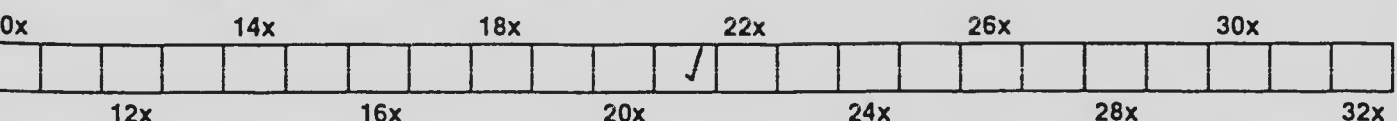

The copy filmed here has been reproduced thanks to the generosity of:



National Library of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol  $\rightarrow$  (meaning "CONTINUED"), or the symbol  $\nabla$  (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

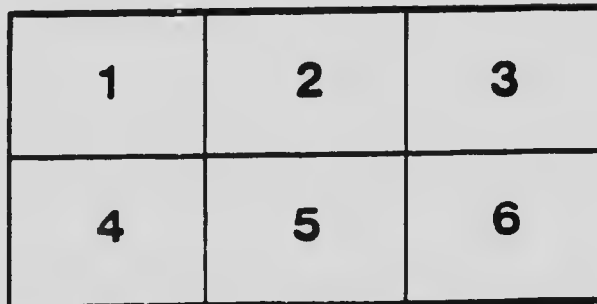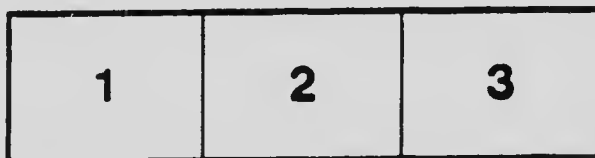

L'exemplaire filmé fut reproduit grâce à la générosité de:


Bibliothèque nationale du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.


Un des symboles suivants apparaît sur la dernière image de chaque microfiche, selon le cas: le symbole  $\rightarrow$  signifie "A SUIVRE", le symbole  $\nabla$  signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

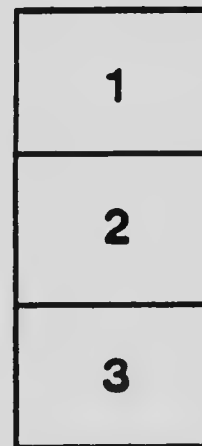

# MICROCOPY RESOLUTION TEST CHART


(ANSI and ISO TEST CHART No. 2)

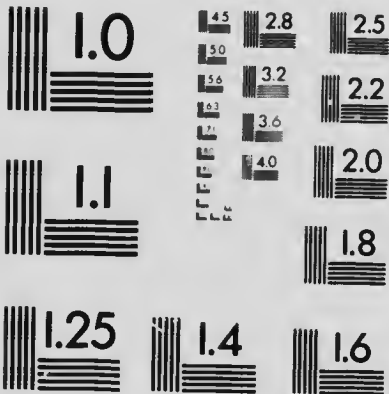


**APPLIED IMAGE Inc**

1653 East Main Street  
Rochester, New York 14609 USA  
(716) 482 - 0300 - Phone  
(716) 288 - 5989 - Fax

E4  
D.K.

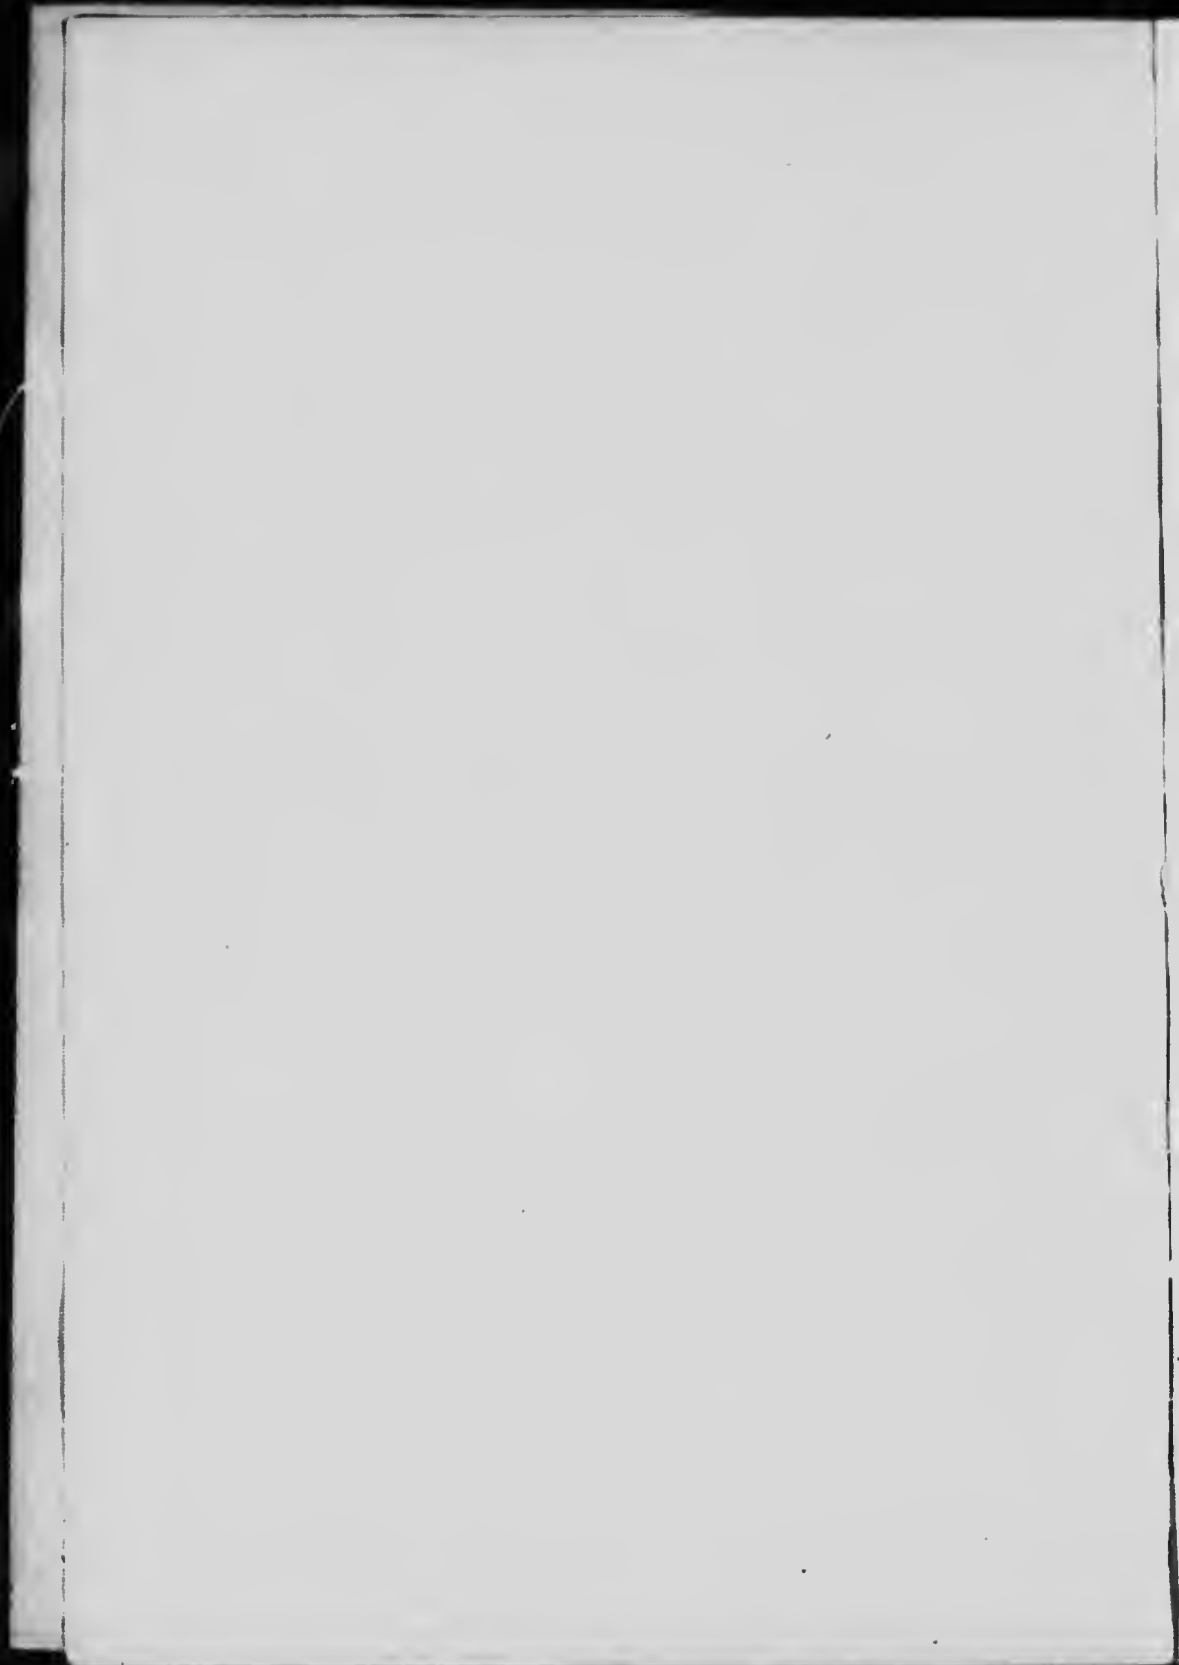

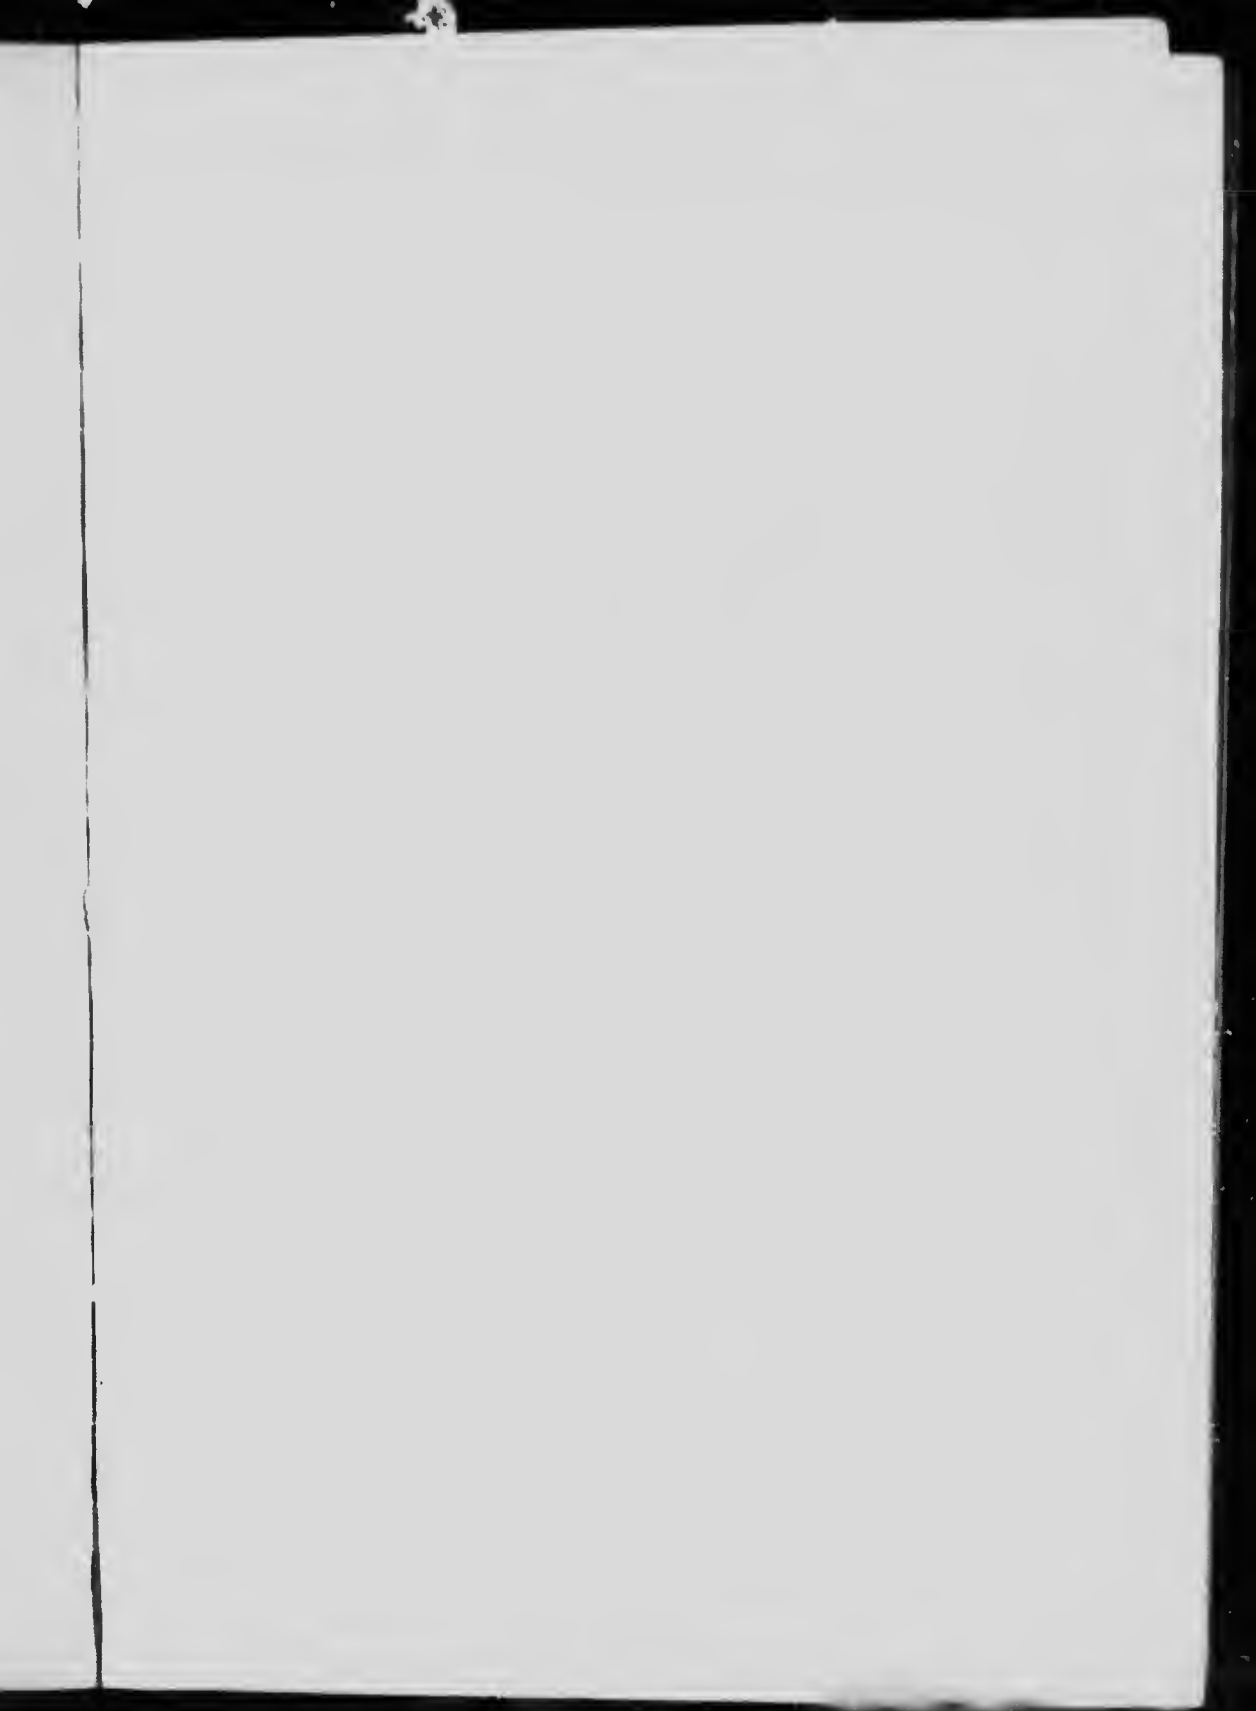



6 W. 43707 4849.



# *Modern Carentry*

## A PRACTICAL MANUAL


A NEW AND COMPLETE GUIDE CONTAINING HUNDREDS OF WORK METHODS FOR PERFORMING WORK IN CARENTRY, JOINING AND GENERAL WOODWORK, WRITTEN IN A CLEAR, EVERY-DAY STYLE THAT DOES NOT BEMODER THE WORKINGMAN, ILLUSTRATED WITH HUNDREDS OF DIAGRAMS WHICH ARE ESPECIALLY MADE SO THAT ANYONE CAN FOLLOW THEM WITHOUT DIFFICULTY.

BY

FRED T. HODGSON, Architect

Editor of the NATIONAL BUILDER, Author of "Common Sense Handing," "Practical Uses of the Steel Square," etc.

ILLUSTRATED



## The Radford Architectural Co.

Riverside, Ill., U. S. A.

Chicago

New York

TH5606

H69

1902

ptt.

## *Special!*

**W**ITHOUT extra cost to our readers we have added to this volume the perspective views and floor plans of twenty-five houses. The complete working plans and specifications of any of these houses will be mailed the same day the order is received.

Send all orders to

**THE RADFORD ARCHITECTURAL CO.**

RIVERSIDE, ILL., U. S. A.



COPYRIGHTED, 1902  
BY FREDERICK J. DRAKE & CO.

89312724

## PREFACE

"Good wine," says Shakespeare, "needs no bush," which of course means that when a thing is good in itself, praise makes it no better. So with a book, if it is good, it needs no preface to make it better. The author of this book flatters himself that the work he has done on it, both as author and compiler, is good; therefore, from his standpoint a preface to it is somewhat a work of supererogation. His opinion regarding the quality of the book may be questioned, but after forty years' experience as a writer of books for builders, all of which have met with success, and during that time over thirty years editor of one of the most popular building journals in America, he feels his opinion, reinforced as it is by thousands of builders and woodworkers throughout the country, should be entitled to some weight. Be that as it may, however, this little book is sent out with a certainty that the one and a half million of men and boys who earn their living by working wood, and fashioning it for useful or ornamental purposes, will appreciate it, because of its main object, which is to lessen their labors by placing before them the quickest and most approved methods of construction.

To say more in this preface is unnecessary and a waste of time for both reader and author.

FRED T. HODGSON.

COLLINGWOOD, ONTARIO, July, 1902.



# CONTENTS

## PART I

### CARPENTER'S GEOMETRY

	PAGE
The Circle.....	9
Tangents.....	11
Degrees.....	14
Circular Ornamentation.....	18
Finding Centers.....	20
Polygons.....	22
Bisecting Angles.....	28
Octagons.....	30
Straight Line Solutions.....	32
Bisecting Angles with Steel Square.....	34
Solutions of Problems with Steel Square.....	38
Ellipses, Spirals and Other Curves.....	41
Describing Elliptical Curves.....	46
Flexible Radial Guide.....	49
Ovals.....	50
Spirals.....	52
Parabola and Its Uses, The.....	56
Cycloidal Curves.....	57

## PART II

### PRACTICAL EXAMPLES

Segmental Arches.....	61
Flat Arches.....	62
Horseshoe Arches.....	62
Lintel Arches.....	63
Elliptical Arches.....	63
Lancet Arches.....	64
Four Centered Arches.....	65
Ogee Arches.....	66
Mouldings.....	67
Balusters and Turned-work.....	68
Steel Square, Description of.....	70
Lumber Rule.....	71
Brace Rule.....	73

	PAGE
Table of Braces.....	75
Octagon Rule on Steel Square.....	76
Rafter Rule by Steel Square.....	76
Cutting Bridging.....	78
Dividing Lines.....	79
Laying off Pitches.....	81
Cuts and Bevels for Rafters..	83
Bevels for Hips, Jack Rafters and Purlins.....	85
Framing Sills, etc.....	87
Trimming Stairs, Chimneys, etc.....	89
Framing Corners, etc.....	91
Roofs and Roofing Generally.....	96
Lines for Hip Roofs.....	98
Octagon Hip Roofs.....	99
Lengths of Jack Rafters.....	102
Trussed Roofs.....	103
Sisser Roofs.....	104
Domical Roofs.....	105
Spires and Spire Framing.....	108
Triangular Framing.....	109
Timber Scarfing in Various Ways.....	110
Mortise and Tenon in Timber.....	111
Reinforcing Timber.....	113
Strapping Timber.....	112
Trussing and Strengthening Timber.....	114

## PART III

## JOINER'S WORK

Laying out Kerfs.....	118
Bending Kerfed Stuff.....	119
Kerfing for an Ellipse.....	120
Kerfing on a Rake.....	121
Mitering Circular Mouldings.....	121
Mitering Circular and Straight Mouldings.....	122
Mitering Curved Mouldings in Panels.....	122
Laying out Curved Hips.....	123
Laying out Ogee Hips and Rafters.....	124
Laying out Curved Hips and Jack Rafters.....	125
Raking Mouldings.....	126
Raking Mouldings for Pediments.....	128
Laying out Raking Mouldings for Circular Pediments..	129

## CONTENTS

7

	PAGE
Cutting Raking Mouldings in Miter-box.....	130
Angle Bars at Different Angles.....	131
Inside Cornices on a Rake.....	132
Cluster Columns.....	133
Bases and Capitals of Cluster Columns.....	133
Hoppers, Regular.....	134
Miter Cuts for Hoppers.....	135
Butt Cuts for Hoppers.....	136
Housed Hopper Cuts.....	137
Corner Blocks for Hoppers, etc.....	139
Corner Blocks for Acute Hoppers.....	140
Miters for Square Hoppers.....	141
Miters for Acute Hoppers.....	141
Miters for Obtuse Hoppers.....	142
Compound Hopper Lines.....	143
Covering a Conical Roof.....	149
Gore for Conical Roof.....	150
Covering Domical Roofs.....	150
Inclined Domical Roof.....	151
Circular Door Entrances.....	152
Bending Block for Splayed Heads.....	153
Splayed Soffits.....	154
Gothic Soffits.....	155
Dovetailing.....	156
Common Dovetailing.....	157
Lapped Dovetailing.....	158
Blind Dovetailing.....	159
Splayed Dovetailing.....	159
Stairbui'ding.....	159
Pitch-board and Strings.....	160
Treads, Risers and Strings.....	161
Dog-legged Stairs.....	162
Table of Treads and Risers.....	163
Winding Stairs.....	163
Open String Stairs.....	164
Setting Rail and Newel Post.....	164
Method of Forming Step.....	165
Bracketed Steps.....	165
Joiner's Work Generally.....	167
Various Styles of Stairs.....	168
Styles of Doors.....	169
Description of Doors.....	170

	PAGE
Window Frames and Sections.....	171
Miscellaneous Illustrations .....	172
Description of Balloon Framing.....	173
Sections of Bay Window Frames.....	174
Turned Mouldings and Carved Newels.....	174
Shingling, Different Methods... ..	175
Shingling Hip Rafters.....	175
Shingling Valleys.....	175
Illustrations of Shingling.....	176
Flashings for Valleys.....	177

## PART IV

## USEFUL TABLES AND MEMORANDA FOR BUILDERS

Lumber Measurement Table.....	182
Strength of Materials.....	182
Table of Superficial or Flat Measure.....	183
Round and Equal-sided Timber Measure.....	183
Shingling .....	184
Table for Estimating Shingles.....	184
Siding, Flooring and Laths.....	184
Excavations.....	184
Number of Nails Required in Carpentry Work... ..	185
Sizes of Boxes for Different Measures.....	185
Masonry .....	185
Brick Work .....	187
Slating .....	188
To Compute the Number of Slates of a Given Size Required per Square.....	188
Approximate Weight of Materials for Roofs.....	189
Snow and Wind Loads.....	189
United States Weights and Measures.....	190
Land Measure.....	190
Cubic or Solid Measure.....	191
Linear Measure.....	191
Square Measure.....	191
Miscellaneous Measures and Weights.....	191
Safe-bearing Loads.....	192
Capacity of Cisterns for Each Ten Inches in Depth.....	192
Number of Nails and Tacks per Pound.....	193
Wind Pressure on Roofs.....	193



# MODERN CARPENTRY

## PART I

### CARPENTER'S GEOMETRY

#### CHAPTER I

##### THE CIRCLE

While it is not absolutely necessary that, to become a good mechanic, a man must need be a good scholar or be well advanced in mathematics or geometry, yet, if a man be proficient in these sciences they will be a great help to him in aiding him to accomplish his work with greater speed and more exactness than if he did not know anything about them. This, I think, all will admit. It may be added, however, that a man, the moment he begins active operations in any of the constructional trades, commences, without knowing it, to learn the science of geometry in its rudimentary stages. He wishes to square over a board and employs a steel or other square for this purpose, and, when he scratches or pencils a line across the board, using the edge or the tongue of the square as a guide, while the edge of the blade is against the edge of the board or parallel with it, he thus solves his first geometrical problem, that is, he makes a right angle with the edge of the board. This is one step forward in the path of geometrical science.

He desires to describe a circle, say of eight inches diameter. He knows instinctively that if he opens his


compasses until the points of the legs are four inches apart,—or making the radius four inches—he can, by keeping one point fixed, called a "center," describe a circle with the other leg, the diameter of which will be eight inches. By this process he has solved a second geometrical problem, or at least he has solved it so far that it suits his present purposes. These examples, of course, do not convey to the operator the more subtle qualities of the right angle or the circle, yet they serve, in a practical manner, as assistants in every-day work.

When a man becomes a good workman, it goes without saying that he has also become possessor of a fair amount of practical geometrical knowledge, though he may not be aware of the fact.

The workman who can construct a roof, hipped, gabled, or otherwise, cutting all his material on the ground, has attained an advanced practical knowledge of geometry, though he may never have heard of Euclid or opened a book relating to the science. Some of the best workmen I have met were men who knew nothing of geometry as taught in the books, yet it was no trouble for them to lay out a circular or elliptical stairway, or construct a rail over them, a feat that requires a knowledge of geometry of a high order to properly accomplish.

These few introductory remarks are made with the hope that the reader of this little volume will not be disheartened at the threshold of his trade, because of his lack of knowledge in any branch thereof. To become a good carpenter or a good joiner, a young man must begin at the bottom, and first learn his A, B, C's, and the difficulties that beset him will disappear one after another as his lessons are learned. It

must always be borne in mind, however, that the young fellow who enters a shop, fully equipped with a knowledge of general mathematics and geometry, is in a much better position to solve the work problems that crop up daily, than the one who starts work without such equipment. If, however, the latter fellow be a boy possessed of courage and perseverance, there is no

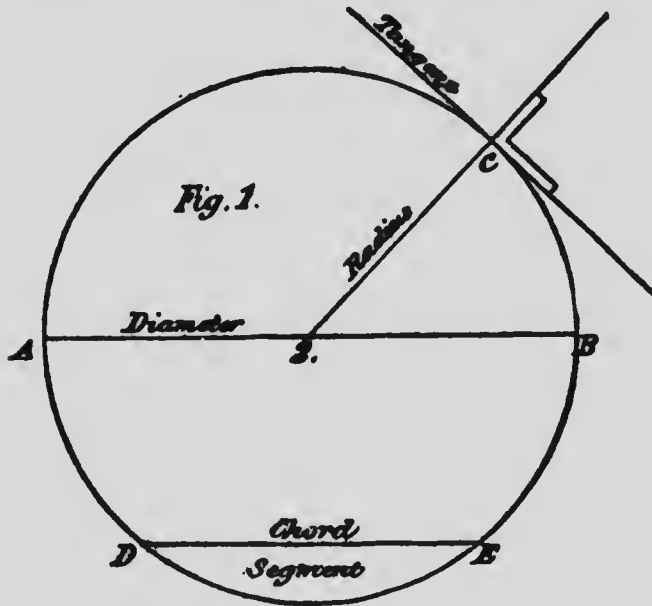

reason why he should not "catch up"—even overtake—the boy with the initial advantages, for what is then learned will be more apt to be better understood, and more readily applied to the requirements of his work. To assist him in "catching up" with his more favored shopmate, I propose to submit for his benefit a brief description and explanation of what may be termed "Carpenter's Geometry," which will be quite

sufficient if he learn it well, to enable him to execute any work that he may be called upon to perform; and I will do so as clearly and plainly as possible, and in as few words as the instructions can be framed so as to make them intelligible to the student.


The circle shown in Fig. 1 is drawn from the center 2, as shown, and may be said to be a plain figure within a continual curved line, every part of the line being equally distant from the center 2. It is the simplest of all figures to draw. The line AB, which cuts the circumference, is called the diameter, and the line DE is denominated a chord, and the area enclosed within the curved line and the chord is termed a segment. The radius of a circle is a line drawn from the center 2 to the circumference C, and is always one-half the length of the diameter, no matter what that diameter may be. A tangent is a line which touches the circumference at some point and is at right angles with a radial line drawn to that point as shown at C.

The reader should remember these definitions as they will be frequently used when explanations of other figures are made; and it is essential that the learner should memorize both the terms and their significations in order that he may the more readily understand the problems submitted for solution.

It frequently happens that the center of a circle is not visible but must be found in order to complete the circle or form some part of the circumference. The center of any circle may be found as follows: let BHC, Fig. 2, be a chord of the segment II; and BJA a chord enclosing the segment. Bisect or divide in equal parts, the chord BC, at H, and square down from this point to D. Do the same with the chord AJB, squaring over from J to D, then the

point where JD and HD intersect, will be the center of the circle.


This is one of the most important problems for the carpenter in the whole range of geometry as it enables the workman to locate any center, and to draw curves he could not otherwise describe without this or other similar methods. It is by aid of this problem that through any three points not in a straight line, a

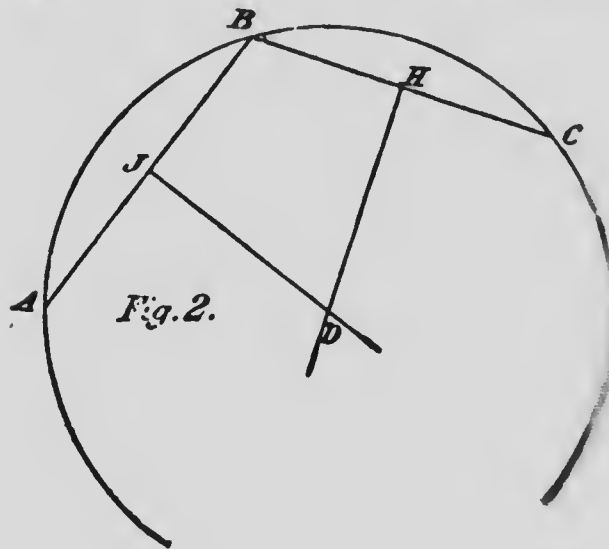

circle can be drawn that will pass through each of the three points. Its usefulness will be shown further as applied to laying out segmental or curved top window, door and other frames and sashes, and the learner should thoroughly master this problem before stepping further, as a full knowledge of it will assist him very materially in understanding other problems.

The circumference of every circle is measured by being supposed to be divided into 360 equal parts, called *degrees*; each degree containing 60 *minutes*, a


smaller division, and each minute into 60 *seconds*, a still smaller division. Degrees, minutes, and seconds are written thus:  $45^{\circ} 15' 30''$ , which is read, forty-five degrees, fifteen minutes, and thirty seconds. This, I think, will be quite clear to the reader. Arcs are measured by the number of degrees which they contain: thus, in Fig. 3, the arc AE, which contains  $90^{\circ}$ , is called a quadrant, or the quarter of a circumference, because

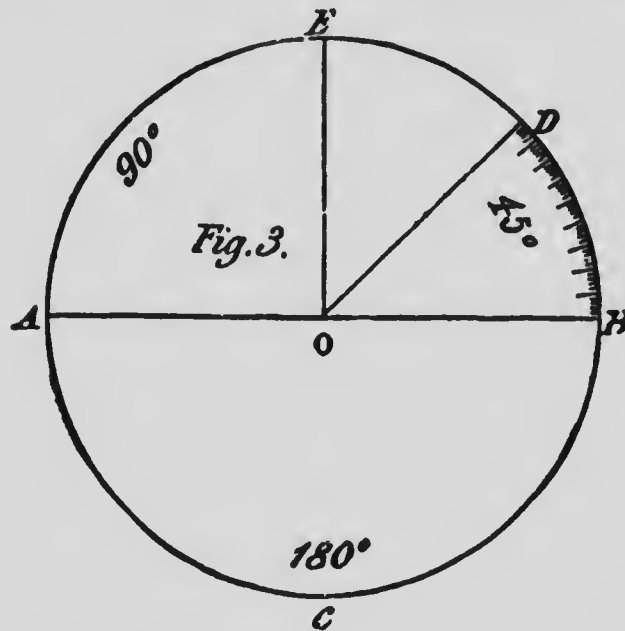

$90^{\circ}$  is one quarter of  $360^{\circ}$ , and the arc ABC which contains  $180^{\circ}$ , is a semi-circumference. Every angle is also measured by degrees, the degrees being reckoned on an arc included between its sides; described from the vertex of the angle as a center, as the point O, Fig. 3; thus, AOE contains  $90^{\circ}$ ; and the angle BOD, which is half a right angle, is called an angle of  $45^{\circ}$ , which is

the number it contains, as will be seen by counting off the spaces as shown by the divisions on the curved line AD. These rules hold good, no matter what may be the diameter of the circle. If large, the divisions are large; if small, the divisions are small, but the manner of reckoning is always the same.


One of the qualities of the circle is, that when divided in two by a diameter, making two semicircles, any chord starting at the extremity of such a diameter, as at A or B, Fig. 4 and cutting the circumference at any point, as at C or E, a line drawn from this

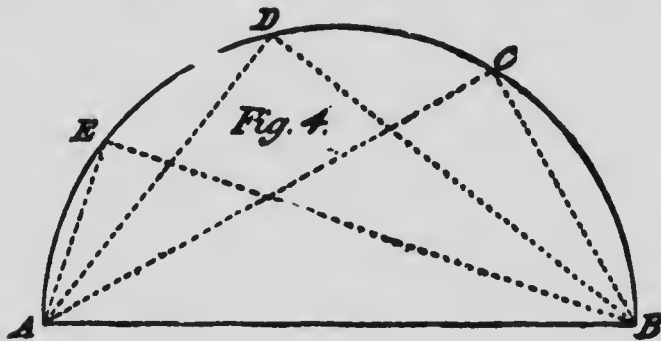

point to the other extremity of the diameter, will form a right angle—or be square with the first chord, as is shown by the dotted lines BCA, BDA, and BEA. This is something to be remembered, as the problem will be found useful on many occasions.


The diagram shown at Fig. 5 represents a hexagon within a circle. This is obtained by stepping around the circumference, with the radius of the circle on the compasses, six times, which divides the circumference into six equal parts; then draw lines to each point, which, when completed, will form a hexagon, a six-sided figure. By drawing lines from the points obtained in the circumference to the center, we get a

three-sided figure, which is called an equilateral triangle, that is, a triangle having all its sides equal in

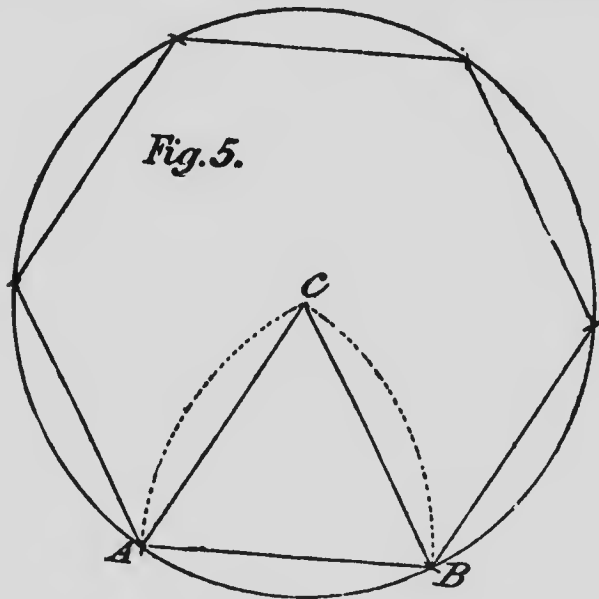

length; as AB, AC and BC. The dotted lines show how an equilateral triangle may be produced on a straight line if necessary.


The diagram shown at Fig. 6 illustrates the method of trisecting a right angle or quadrant into three equal parts. Let A be a center, and with the same radius intersect at E, thus the quadrant or right angle is divided into three equal parts.

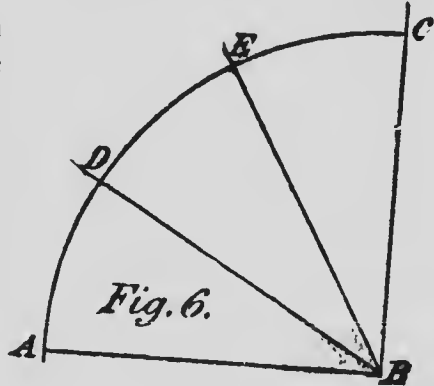



If we wish to get the length of a straight line that shall equal the circumference of a circle or part of circle or quadrant, we can do so by proceeding as follows: Suppose Fig. 7 to represent half of the circle, as at ABC; then draw the chord BC, divide it at P, join it at A; then four times PA is equal to the circumference of a circle whose diameter is AC, or equal to the curve CB.


To divide the quadrant AB into any number of equal parts, say thirteen, we simply lay on a rule and make the distance from A to R measure three and one-

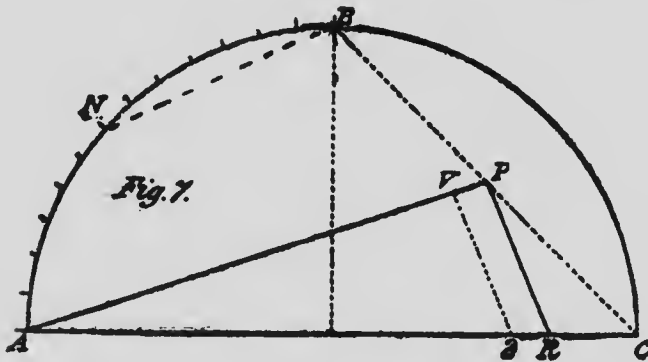

fourth inches, which are thirteen quarters or parts on the rule; make R2 equal one-fourth of an inch; join RP; draw from 2 parallel with RP, cutting at V; now take PV in the dividers and set off from A on the circle thirteen parts, which end at B, each part being equal to PV, and the problem is solved. The "stretchout" or length of any curved line in the circle can then be obtained by breaking it into segments by chords, as shown at BN.


I have shown in Fig. 5, how to construct an equilateral triangle by the use of the compasses. I give at

Fig 8 a practical example of how this figure, in connection with circles, may be employed in describing a figure known as the trefoil, a figure made much use of in the construction of church or other Gothic work and for windows and carvings on doors and panelings. Each corner of the triangle, as ABC, is a center from which are described the curves shown within the outer circles. The latter curves are struck from the center

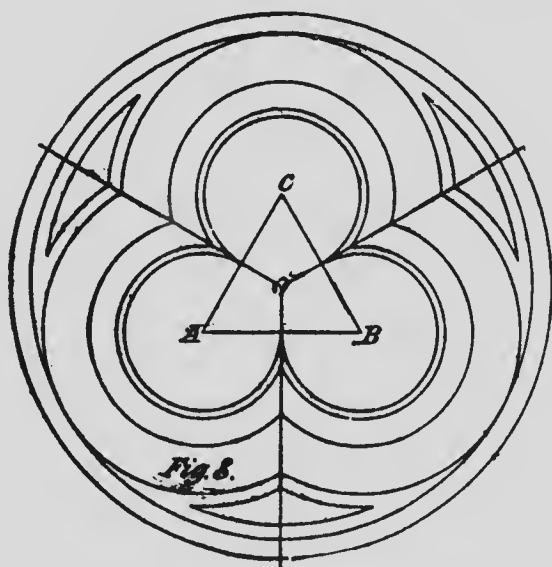

O, which is found by dividing the sides of the equilateral triangle and squaring down until the lines cross at O. The joint lines shown are the proper ones to be made use of by the carpenter when executing his work. The construction of this figure is quite simple and easy to understand, so that any one knowing how to handle a rule and compass should be able to construct it after a few minutes' thought. This figure is the key to most Gothic ornamentation, and is worth mastering.


There is another method of finding the length or "stretchout" of the circumference of a circle, which I show herewith at Fig. 9. Draw the semicircle SZT, and parallel to the diameter ST draw the tangent UZV; upon S and T as centers, with ST as radius, mark the arcs TR and SR; from R, the intersection of the arcs, draw RS and continue to U; also draw RT, and continue to V; then the line VU will nearly equal in

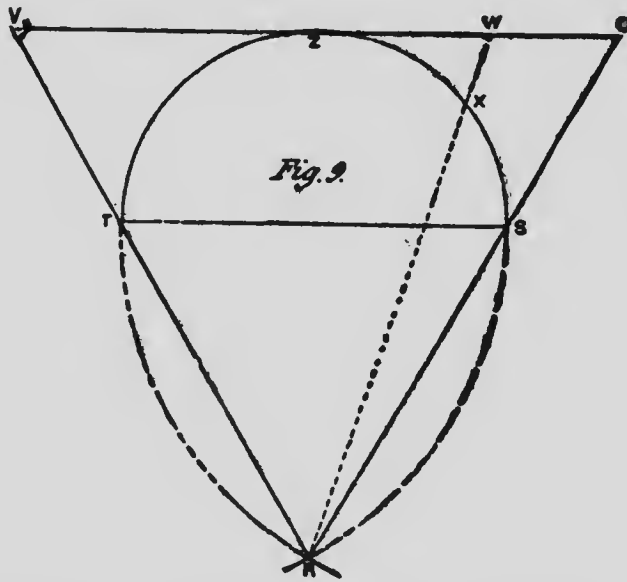

length the circumference of the semicircle. The length of any portion of a circle may be found as follows: Through X draw RW, then WU will be the 'stretchout' or length of that portion of the circle marked SX. There are several other ways of determining by lines a near approach to the length of the circumference or a portion thereof; but, theoretically, the exact "stretchout" of a circumference has not been found by any of the known methods, either arith-

metically or geometrically, though for all practical purposes the methods given are quite near enough. No method, however, that is given geometrically is so simple, so convenient and so accurate as the arithmetical one, which I give herewith. If we multiply the diameter of a circle by 3.1416, the product will give the length of the circumference, very nearly. These figures are based on the fact that a circle whose diameter is 1—say one yard, one foot, or one inch—will have a circumference of nearly 3.1416 times the diameter.

With the exception of the formation of mouldings, and ornamentation where the circle and its parts take a prominent part, I have submitted nearly all concerning the figure, the everyday carpenter will be called

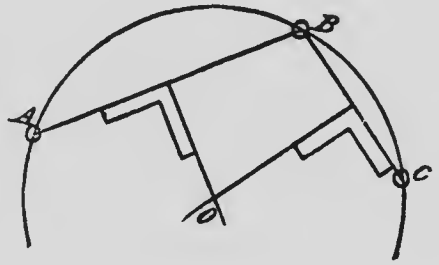

*Fig. 10.*

upon to employ, and when I approach the chapter on Practical Carpentry later on, I will try and show how to use the knowledge now given.

Before leaving the subject, however, it may be as well to show how a curve, having any reasonable radius, may be obtained—practically—if but three points in the circumference are available; as referred to in the explanation given of Fig. 5. Let us suppose there are three points given in the circumference of a circle, as ABC, Fig. 10, then the center of such circle can be found by connecting the points AB and BC by straight lines as shown, and by dividing these lines

and squaring down as shown until the lines intersect at O as shown. This point O is the center of the circle.

It frequently happens that it is not possible to find a place to locate a center, because of the diameter being so great, as in segmental windows and doors of large dimensions. To overcome this difficulty a method

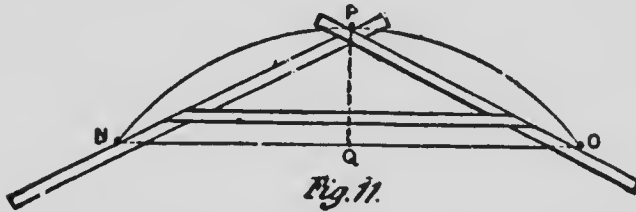


Fig. 11.


has been devised by which the curve may be correctly drawn by nailing three wooden strips together so as to form a triangle, as shown in Fig. 11. Suppose NO to be the chord or width of frame, and QP the height of segment, measuring from the springing lines N and O; drive nails or pins at O and N, keep the triangle close against the nails, and place a pencil at P, then slide the triangle against the pins or nails while sliding, and the pencil will describe the necessary curve. The arms of the triangle should be several inches longer than the line NO, so that when the pencil P arrives at N or O, the arms will still rest against the pins.

## CHAPTER II

### POLYGONS

A polygon is a figure that is bounded by any number of straight lines; three lines being the least that can be employed in surrounding any figure, as a triangle, Fig. 1.

A polygon having three sides is called a trigon; it is also called an equilateral triangle. A polygon of four sides is call a tetragon; it is also called a square and

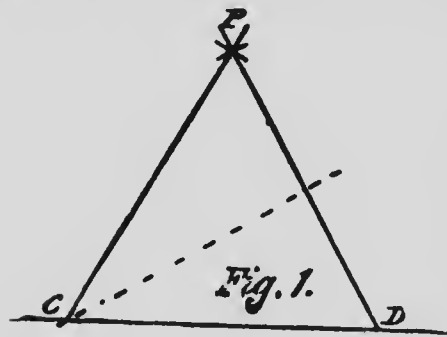


an equilateral rectangle. A polygon of five sides is a pentagon. A polygon of six sides is a hexagon. A polygon of seven sides is called a heptagon. A polygon of eight sides is called an

octagon. A polygon of nine sides is called a nonagon. A polygon of ten sides is called a decagon. A polygon of eleven sides is called an undecagon. And a polygon of twelve sides is called a dodecagon.

There are regular and irregular polygons. Those having equal sides are regular; those having unequal sides are irregular. Polygons having more than twelve sides are known among carpenters by being denominated as a polygon having "so many sides," as a "polygon with fourteen sides," and so on.

Polygons are often made use of in carpenter work, particularly in the formation of bay-windows, oriels, towers, spires, and similar work; particularly is this the case with the hexagon and the octagon; but the most used is the equilateral rectangle, or square; therefore it is essential that the carpenter should know considerable regarding these figures, both as to their qualities and their construction.

The polygon having the least lines is the trigon, a three-sided figure. This is constructed as follows: Let CD, Fig. 1, be any given line, and the distance CD the length of the side required. Then with one leg of the compass on D as a center, and the other on C, describe the arc shown at P. Then with C as a center, describe another arc at P, cutting the first arc. From this point of intersection draw the lines PD and PC, and the figure is complete. To get the miter joint of this figure, divide one side into two equal parts, and from the point obtained draw a line through opposite angle as shown by the dotted line, and this line will be the line of joint at C, or for any of the other angles.

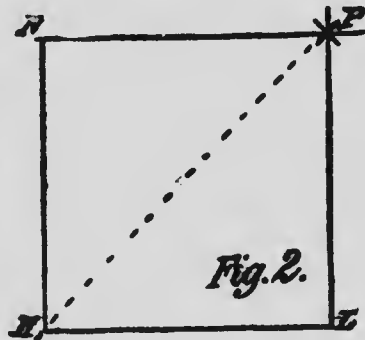

The square, or equilateral rectangle, Fig. 2, may be obtained by a number of methods, many of which will suggest themselves to the reader. I give one method that may prove suggestive. Suppose two sides of a square are given, LHN, the other sides are found by taking HL as radius, and with LN for centers make the intersection in P, draw LP and NP, which com-

pletes the figure. The miter for the joints of a figure of this kind is an angle of  $45^\circ$ , or the regular miter. The dotted line shows the line of "cut" or miter.

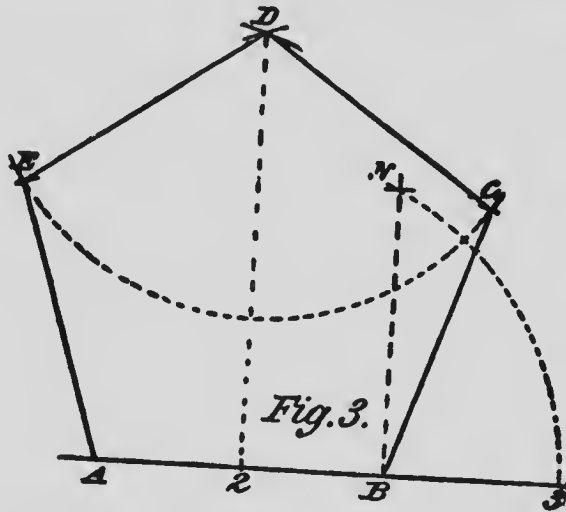


Fig. 3.

To construct a pentagon we proceed as follows: Let AB, Fig. 3, be a given line and spaced off to the length of one side of the figure required; divide this line into two equal parts. From B square up a line;

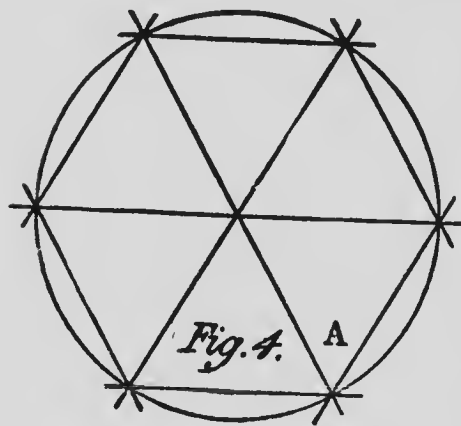



Fig. 4.

make BN equal to AB, strike an arc 3N as shown by the dotted lines, with 2 as a center and N as a radius, cutting the given line at 3. Take A3 for radius; from A and B as centers, make the intersection in D; from D, with a



radius equal to AB, strike an arc; with the same radius and A and B as centers, intersect the arc in EC. By joining these points the pentagon is formed. The cut, or angle of joints, is found by raising a line from 2 and cutting D, as shown by the dotted line.

The hexagon, a six-sided figure shown at Fig. 4, is one of the simplest to construct. A quick method is described in Chapter I, when dealing with circles, but I show the method of construction in order to be certain that the student may be the better equipped to deal with the figure. Take the length of one side of the figure on compasses; make this length the radius of a circle, thus describe a circle as shown. Start from any point, as at A, and step around the circumference of the circle with the radius of it, and the points from which to draw the sides are found, as the radius of any circle will divide the circumference of that circle into six equal parts.

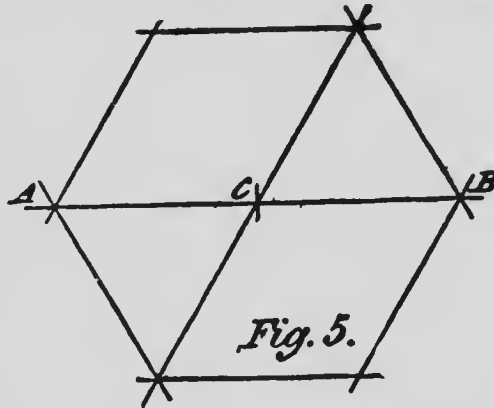

This figure may be drawn without first making a circle if necessary. Set off two equal parts, ABC, Fig. 5, making three centers; from each, with radius AC, make the intersection as shown, through which draw straight lines, and a hexagon is formed. The miter joint follows either of the straight lines passing through the center, the bevelling indicating the proper angle.

The construction of a heptagon or seven-sided figure may be accomplished as follows: Let AB, Fig. 6, be a given line and the distance AB the length of the side of the figure. Divide at K, square up from this point, then take AB for radius and B as a center; intersect the line from K at L; with same radius and A as center, draw the curve 2, 3; then take KL as radius, and from 2 as a center, intersect the circle at 3; draw from it to B, cutting at N, through which point draw from A; make AD equal B3; join A3 and BD; draw from 3 parallel with AD; draw from B through L, cutting at C; join it and A; draw from 3 parallel

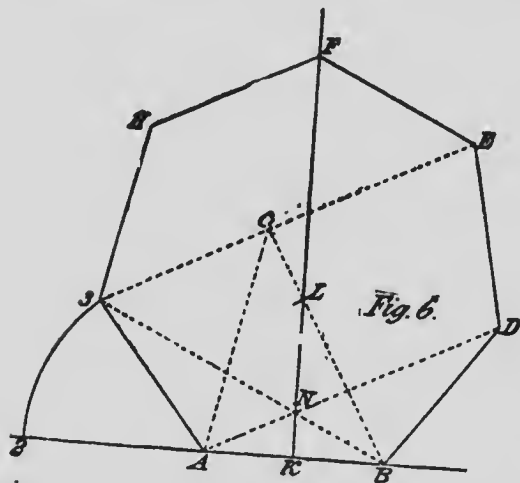


Fig. 6.

with AC; make 3H equal AB, and CE equal ND; join ED; draw from H parallel with 3C, cutting at F, join this line and E, which completes the heptagon. It is not often this figure is used in carpentry,

though I have sometimes employed it in constructing bay windows and dormers, using the four sides, 3H, HF, FE, and ED. This makes a bold front, and serves well in a conservatory or other similar place.


It is proper that the reader should know how to construct this figure, as it serves as an exercise, and illustrates a principle of drawing by parallels, a knowledge of which would be found invaluable to the ambi-

tious young carpenter, who desires to become, not only a good workman, but a good draftsman as well.

The octagon or eight-sided figure claims rank next to the square and circle, in point of usefulness to the general carpenter, owing partly to its symmetry of form, and its simplicity of construction. There are a great number of methods of constructing this figure, but I will give only a few of the simplest, and the ones most likely to be readily understood by the ordinary workman.


One of the simplest methods of forming an octagon is shown at Fig. 7,

where the corners of the square are used as centers, and to the center A of the square for radius. Parts of a circle are then drawn and continued until the boundary lines are cut. At the points found draw diagonal lines across the corner as shown, and the figure will be a complete octagon, having all its sides of equal length.

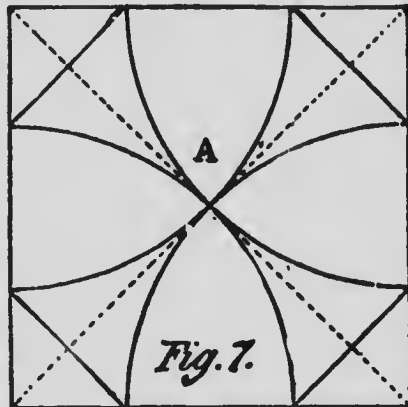


The method of obtaining the joint cut or miter for an octagon is shown at Fig. 8, where the angle ABC, is divided into two equal angles by the following process: From B, with any radius, strike an arc, giving A and C as centers, from which, with any radius, make an intersection, as shown, and through it from B, draw a line, and the proper angle for the cut is obtained, the dotted line being the angle sought. By this method

of bisecting an angle, no matter how obtuse or acute it may be, the miter joint or cut may be obtained. This is a very useful problem, as it is often called into requisition for cutting mouldings in panels and other work, where the angles are not square, as in stairandrills and raking wainscot.

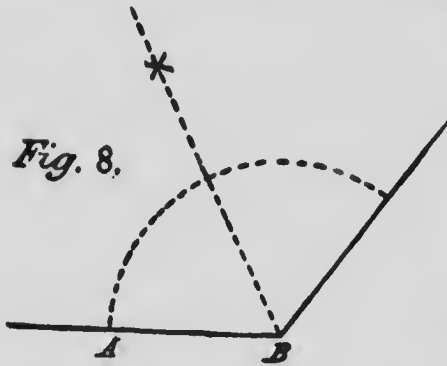


To construct an octagon when the length of one of its sides is given, as AB, Fig. 9, square up the two lines, AN, BF, then

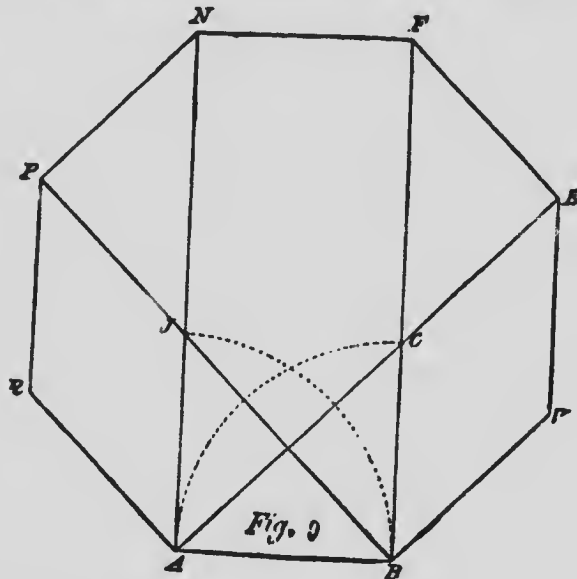

take AB as radius with A and B as centers, and draw the arcs, cutting the two lines at C and J;

draw from AB, through CJ, and again from A draw parallel with BJ; then draw from B parallel with AC; make BV and CF equal AB; join EV; make CF equal CA; square over FN; join FE; draw NP parallel with AC, then join PR, and the figure is complete.

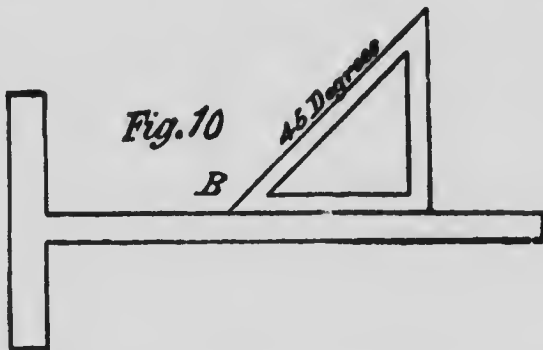


As the sides of all regular octagons are at an angle of  $45^\circ$  with each other, it follows that an octagon may be readily constructed by making use of a set square having its third side to correspond with an angle of  $45^\circ$ , for by extending the line AB, and laying the set square on the line with one point at B, as shown in Fig. 10, the line BV, Fig. 9, can be drawn, and when made the same length as BV, the process can be repeated to VE; and so on until all the points have been connected.

Suppose we have a square stick of timber 12 x 12 inches, and any length, and we wish to make it an octagon; we will first be obliged to find the gauge points so as to mark the stick, to snap a chalk line on it so as to tell how much of the corners must be removed in order to give to the stick eight sides of equal width. We do this as follows: Make a drawing the size of a

section of the timber, that is, twelve inches square, then draw a line from corner to corner as *AB*, Fig. 11, and make *AC* equal in length to *AD*, which is twelve inches; square over from *C* to *K*; set your gauge to *BK*, and run your lines to this gauge, and remove the corners off to lines, and the stick will then be an octagon having eight equal sides.

There are a number of other methods of finding the

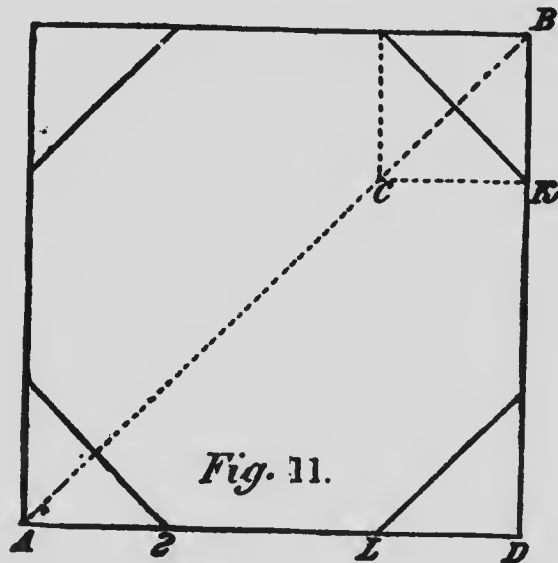


gauge points, some of which I may describe further on, but I think I have dwelt long enough on polygons to enable the reader to lay off all the examples given. The polygons not described are so seldom made use of in carpentry, that no authority that I am aware of describes them when writing for the practical workman; though in nearly all works on theoretical geom-

etry the figures are given with all their qualities. If the solution of any of the problems offered in this work requires a description and explanation of polygons with a greater number of sides than eight, such explanation will be given.

## CHAPTER III

### SOME STRAIGHT LINE SOLUTIONS

The greatest number of difficult problems in carpentry are susceptible of solution by the use of straight lines and a proper application of the steel square, and

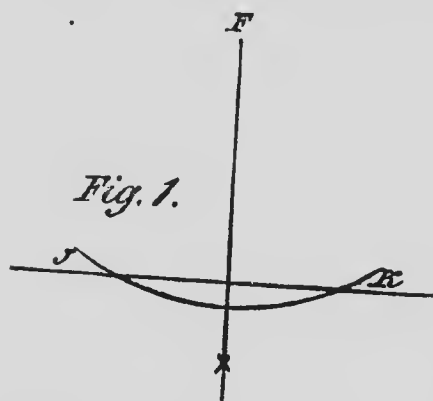

in this chapter I will endeavor to show the reader how some of the problems may be solved, though it is not intended to offer a treatise on the subject of the utility of the steel square, as that subject has been treated at length in other

works, and another and exhaustive work is now in preparation; but it is thought no work on carpentry can be complete without, at least, showing some of the solutions that may be accomplished by the proper use of this wonderful instrument, and this will be done as we proceed.


One of the most useful problems is one that enables us to make a perpendicular line on any given straight line without the aid of a square. This is obtained as follows: Let JK, Fig. 1, be the given straight line, and make F any point in the square or perpendicular line required. From F with any radius, strike the arc



cutting in JK; with these points as centers, and any radius greater than half JK, make intersection as shown, and from this point draw a line to F, and this line is the perpendicular required. Foundations, and other works on a large scale are often "squared" or laid out by this method, or by another, which I will submit later.

In a previous illustration I showed how to bisect an angle by using the compasses and straight lines, so as to obtain the proper joints or miters for the angles. At Fig. 2, I show how this may be done by the aid of the steel square alone,


as follows: The angle is obtuse, and may be that of an octagon or pentagon or other polygon. Mark any two points on the angle, as DN,

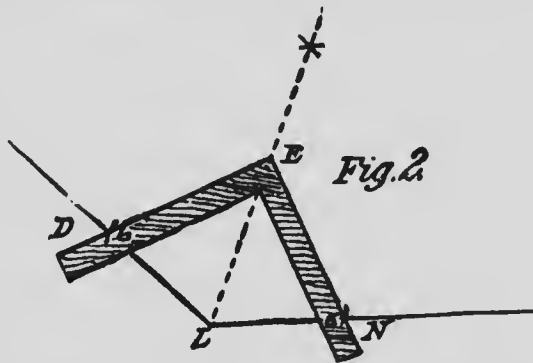

equally distant from the point of angle L; apply the steel square as shown, keeping the distance EN and ED the same, then a line running through the angle L and the point of the square E will be the line sought.


To bisect an acute angle by the same method, proceed as follows: Mark any two points AC, Fig 3, equally distant from B; apply the steel square as shown, keeping its sides on AC; then the distance on each side of the square being equal from the corner gives it for a point, through which draw a line from B, and the angle is divided. Both angles shown are divided by the same method, making the intersection

in P the center of the triangle. The main thing to be considered in this solution is to have the distances A and C equal from the point B; also an equal distance from the point or toe of the square to the square to the points of contact C and A on the boundary lines.

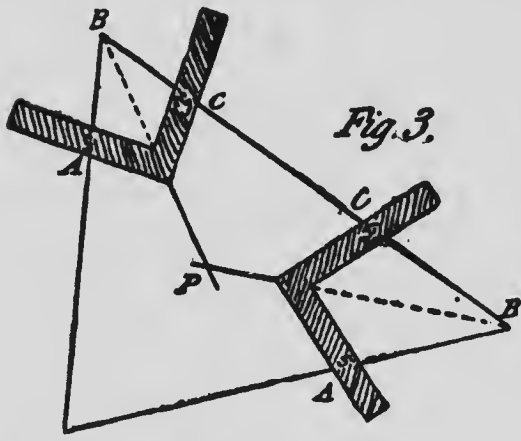

A repetition of the same method of bisecting angles, under other conditions, is shown at Fig. 4. The process is just the same, and the

of the same method of bisecting angles, under other conditions, is shown at Fig. 4. The process is just the same, and the

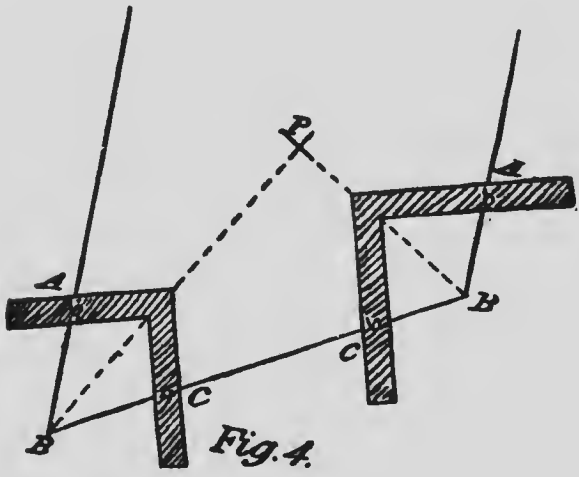

reference letters are also the same, so any further explanation is unnecessary.

To get a correct miter cut, or, in other words, an angle of  $45^\circ$ , on a board, make either of the points A or C, Fig. 5, the starting point for the miter, on the edge of the board, then apply the square as shown, keeping the figure 12" at A or C, as the case may be, with the figure 12" on the

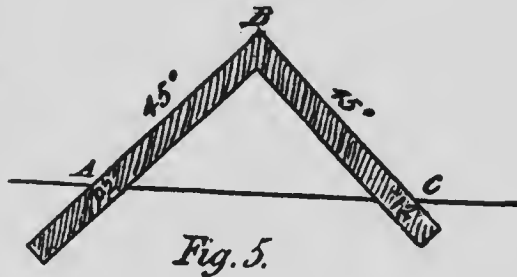


Fig. 5.

other blade of the square on the edge of the board as shown; then the slopes on the edge of the square from A to B and C to B, will form angles of  $45^\circ$  with the base line AC. This problem is useful from many points of view, and will often suggest itself to the workman in his daily labor.

To construct a figure showing on one side an angle of  $30^\circ$  and on the other an angle of  $60^\circ$ , by the use of


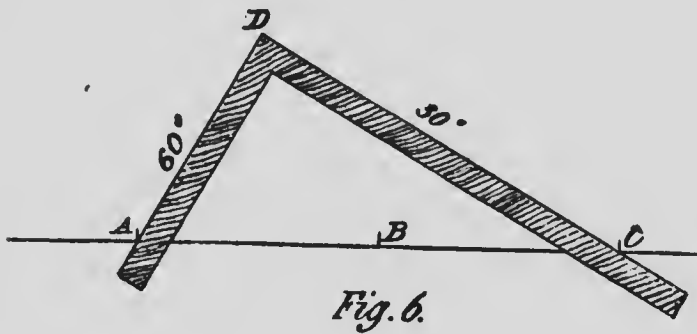


Fig. 6.

the steel square, we go to work as follows: Mark on the edge of a board two equal spaces as AB, BC, Fig. 6, apply the square, keeping its blade on AC and making

AD equal AB; then the angles  $30^\circ$  and  $60^\circ$  are formed as shown. If we make a templet cut exactly as shown in Fig. 5, also a templet cut as shown in this last figure, and these templets are made of some hard wood, we get a pair of set squares for drawing purposes, by which a large number of geometrical problems and drawing kinks may be wrought out.


The diameter of any circle within the range of the steel square may be determined by the instrument as follows: The corner of the square touching any part of the circumference A, Fig. 7, and the blade cutting in points C, B, gives the diameter of the circle as

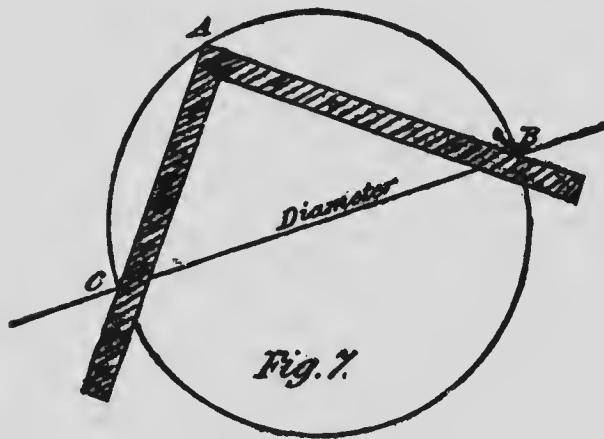

shown. Another application of this principle is, that the diameter of a circle being known, the square may be employed to describe the circumference. Suppose CB to be the known diameter; then put in two nails as shown, one at B and the other at C, apply the square, keeping its edges firmly against the nails, continually sliding it around, then the point of the square A will describe half the circumference. Apply the

square to the other side of the nails, and repeat the process, when the whole circle will be described. This problem may be applied to the solution of many others of a similar nature.

At Fig. 8, I show how an equilateral triangle may be obtained by the use of a square. Draw the line

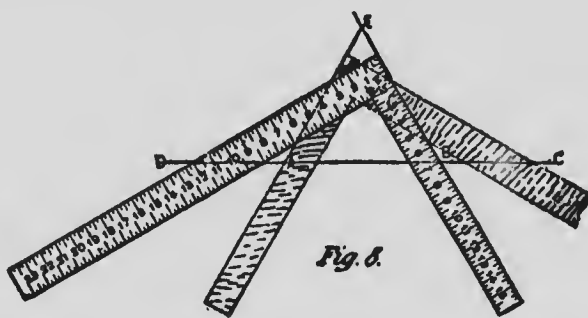


DC; take 12 on the blade and 7 on the tongue; mark on the tongue for one side of the figure. Make the distance from D to A equal to the desired length of one side of the figure. Reverse the square, placing it as shown by the dotted lines in the sketch, bringing 7 of the tongue against the point A. Scribe along the tongue, producing the line until it intersects the first line drawn in the point E, then AEB will be an equilateral triangle. A method of describing a hexagon by the square, is shown at Fig. 9, which is quite simple. Draw the line GH; lay off the required length of one side on this line, as DE. Place the square as before, with 12 of the blade and 7 of the tongue against the line GH; placing 7 of the tongue against the point D, scribe along the tongue for the side DC. Place the square as shown by the dotted lines; bringing 7 of the tongue against the point E, scribe the side EF. Con-

tinue in this way until the other half of the figure is drawn. All is shown by FABC.


The manner of bisecting angles has been shown in Figs. 2, 3 and 4 of the present chapter, so that it is not necessary to repeat the process at this time.

The method of describing an octagon by using the square, is shown at Fig. 10. Lay off a square

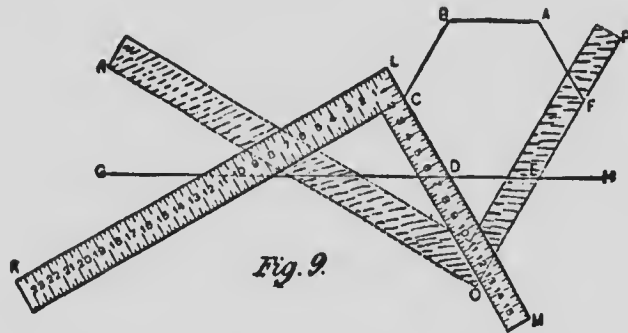

*Fig. 9.*

section with any length of sides, as AB. Bisect this side and place the square as shown on the side

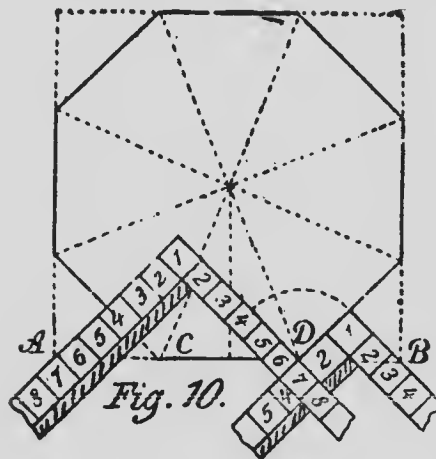


*Fig. 10.*


AB, with the length bisected on the blade and tongue; then the tongue cuts the side at the point to gauge for the piece to be removed. To find the size of square required for an octagonal prism, when the side is given: Let CD equal the given side; place the square on the

line of the side, with one-half of the side on the blade and tongue; then the tongue cuts the line at the point B, which determines the size of the square, and the piece to be removed.

A near approximation to the length or stretch-out of a circumference of a circle may be obtained by the aid of the steel square and a straight line, as follows: Take three diameters of the circle and measure up the side of the blade of the square, as shown at Fig. 11, and fifteen-sixteenths of one diameter on the tongue. From these two points

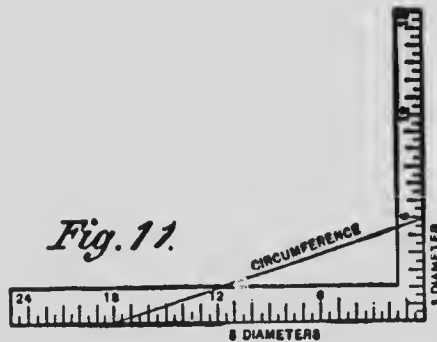

*Fig. 11.*

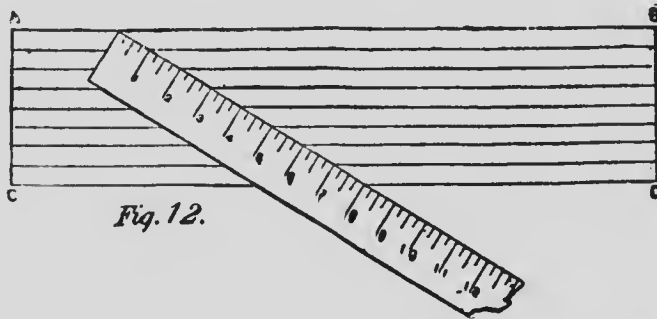

*Fig. 12.*

draw a diagonal, and the length of this diagonal will be the length or stretch-out of the circumference nearly.

If it is desired to divide a board or other substance into any given number of equal parts, without going through the process of calculation, it may readily be done by the aid of the square or even a pocket rule.

AC, BD, Fig. 12, be the width of the board or

other material, and this width is seven and one-quarter inches, and we wish to divide it into eight equal parts. Lay on the board diagonally, with the furthest point of the square fair with one edge, and the mark 8 on the square on the other edge; then prick off the inches, 1, 2, 3, 4, 5, 6 and 7 as shown, and these points will be the gauge points from which to draw the parallel lines. These lines, of course, will be something less than one inch apart.

If the board should be more than eight inches wide, then a greater length of the square may be used, as for instance, if the board is ten inches wide, and we wish to divide it into eight equal parts, we simply make use of the figure 12 on the square instead of 8, and prick off the spaces every one and a half inches on the square. If the board is more than 12 inches wide, and we require the same number of divisions, we make use of figure 16 on the square, and prick off at every two inches. Any other divisions of the board may be obtained in a like manner, varying only the use of the figures on the square to get the number of divisions required.

As a number of problems in connection with actual work, will be wrought out on similar lines to the foregoing, further on in this book, I will close this chapter in order to give as much space as possible in describing the ellipse and the higher curves.



## CHAPTER IV

### ELLIPSES, SPIRALS, AND OTHER CURVES


The ellipse, next to the circle, is the curve the carpenter will be confronted with more than any other, and while it is not intended to discuss all, or even a major part, of the properties and characteristics of this curve, I will endeavor to lay before the reader all in connection with it that he may be called upon to deal with.

According to geometers, an ellipse is a conic section formed by cutting a cone through the curved surface, neither parallel to the base nor making a subcontrary section, so that the ellipse like the circle is a curve that returns within itself, and completely encloses a space. One of the principal and useful properties of the ellipse is, that the rectangle under the two segments of a diameter is as the square of the ordinate. In the circle, the same ratio obtains, but the rectangle under the two segments of the diameter becomes equal to the square of the ordinate.

It is not necessary that we enter into a learned description of the relations of the ellipse to the cone and the cylinder, as the ordinary carpenter may never have any practical use of such knowledge, though, if he have time and inclination, such knowledge would avail him much and tend to broaden his ideas. Suffice for us to show the various methods by which this curve may be obtained, and a few of its applications to actual work.

One of the simplest and most correct methods of describing an ellipse, is by the aid of two pins, a string


and a lead-pencil, as shown at Fig. 1. Let FB be the major or longest axis, or diameter, and DC the minor or shorter axis or diameter, and E and K the two foci.

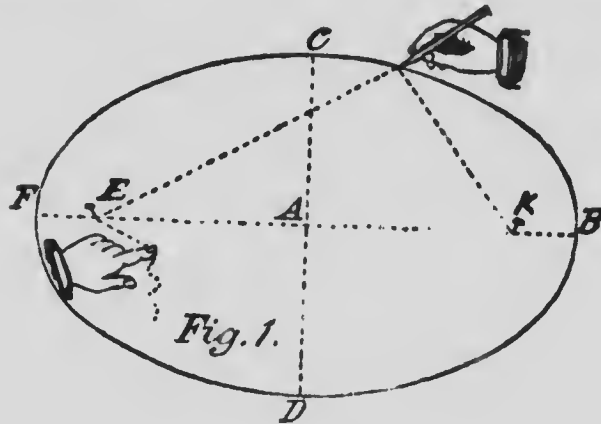

These two points are obtained by taking the half of the major axis AB or FA, on the compasses, and standing one point at D, cut the points E and K on the line FB, and at these points insert the pins at E and K as shown. Take a string as shown by the dotted lines and tie to the pins at K, then stand the pencil at C and run the string round it and carry the string to the pin E, holding it tight and winding it once or twice around the pin, and then holding the string with the finger. Run the pencil around, keeping the loop of the string on the pencil and it will guide the latter in the formation of the curve as shown. When one-half of the ellipse is formed, the string may be used for the other half, commencing the curve at F or B, as the case may be. This is commonly called "a gardener's oval," because gardeners make use of it for forming ornamental beds for flowers, or in making curves for

walks, etc., etc. This method of forming the curve, is based on the well-known property of the ellipse that the sum of any two lines drawn from the foci to their circumference is the same.

Another method of projecting an ellipse is shown at Fig. 2, by using a trammel. This is an instrument consisting of two principal parts, the fixed part

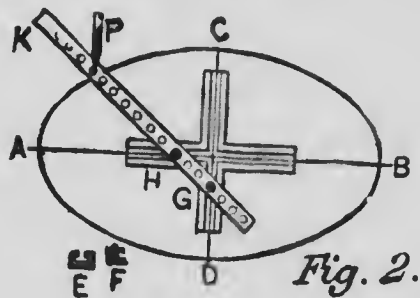


*Fig. 2.*


in the form of a cross as CD, AB, and the movable tracer HG. The fixed piece is made of two triangular bars or pieces of wood of equal thickness, joined together so as to be in the same plane. On one side of the frame when made, is a groove forming a right-angled cross; the groove is shown in the section at E. In this groove, two studs are fitted to slide easily, the studs having a section same as shown at F. These studs are to carry the tracer and guide it on proper lines. The tracer may have a sliding stud on the end to carry a lead-pencil, or it may have a number of small holes passed through it as shown in the cut, to carry the pencil. To draw an ellipse with this instrument, we measure off half the distance of the major axis from the pencil to the stud G, and half the minor axis from the pencil point to the stud H, then swing the tracer round, and the pencil will describe the ellipse required. The studs have little projections on their tops, that fit easily into the holes in the tracer, but this may be done away with, and two brad awls or pins may be thrust through the tracer and into the studs, and then

proceed with the work. With this instrument an ellipse may easily be described.

Another method, based on the trammel principle, is shown at Figs. 3 and 4, where the steel square is substituted for the instrument shown in Fig. 2. Draw the line AB, bisecting it at right angles, draw CD. Set off these lines the required dimensions of the ellipse to be drawn. Place an ordinary square as

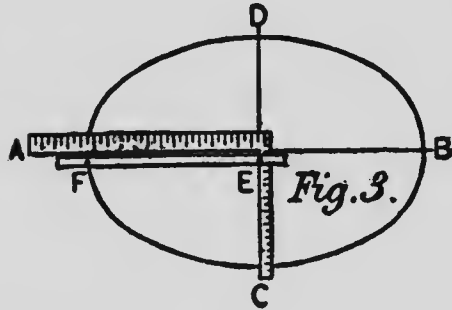


shown. Lay the straightedge lengthwise of the figure, as shown in Fig. 3, and putting a pin at E against the square, place the pencil at F, at a point corresponding with the one of the figure. Next place the straightedge, as shown in Fig. 4, crosswise of the figure, and bring the pencil F to a point corresponding to one side of the figure, and set a pin at G. By keeping the two pins E and G against the square, and moving the straightedge so as to carry the pencil from side to side, one-quarter of the figure will be struck. By placing the square in the same relative position in each of the other three-quarters, the other parts may be struck.

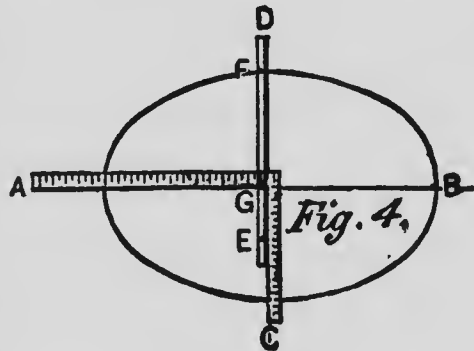

A method,—and one that is very useful for many purposes,—of drawing an ellipse approximately, is shown in Fig. 5. It is convenient and may be applied to hundreds of purposes, some of which will be illustrated as we proceed.


To apply this method, work as follows: First lay off the length of the required figure, as shown by AB, Fig. 5, and the width as shown by CD. Construct a parallelogram that shall have its sides tangent

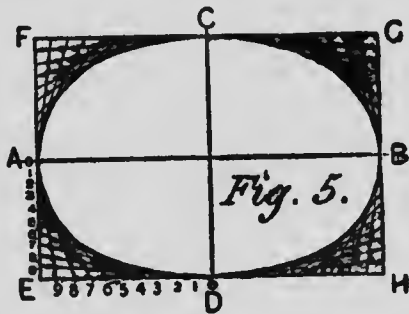

to the figure at the points of its length and width, all as shown by EFGH. Subdivide one-half of the end of the parallelogram into any convenient number of equal parts, as shown at AE, and one-half of its side in the same manner, as shown by ED. Connect these two sets of points by intersecting lines in the manner shown in the engraving. Repeat the operation for each of the other corners of the parallelogram. A line traced through the inner set of intersections will be a very close approximation to an ellipse.

There are a number of ways of describing figures that approximate ellipses by using the compasses, some of them being a near approach to a true ellipse, and it is well that the workman should acquaint himself with the methods of their construction. It is only necessary that a few examples be given in this work, as a knowledge of these shown will lead the way to the construction of others when required. The method exhibited in Fig. 6 is, perhaps, the most useful of any employed by workmen, than all other methods com-


bined. To describe it, lay off the length CD, and at right angles to it and bisecting it lay off the width AB. On the larger diameter lay off a space equal to the shorter diameter or width, as shown by DE. Divide

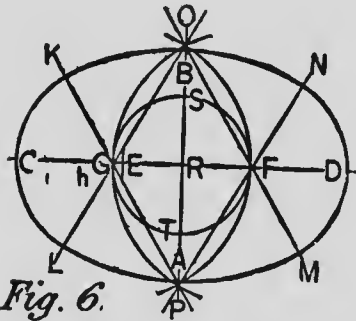

*Fig. 6.*

the remainder of the length or larger diameter EC into three equal parts; with two of these parts as a radius, and R as a center, strike the circle GSFT. Then, with F as a center and FG as radius, and G as center and GF as radius, strike the arcs as

shown, intersecting each other and cutting the line drawn through the shorter diameter at O and P respectively. From O, through the points G and F, draw OL and OM, and likewise from P through the same points draw PK and PN. With O as center and OA as radius, strike the arc LM, and with P as center and with like radius, or PB which is the same, strike the arc KN. With F and G as centers, and with FD and CG which are the same, for radii,

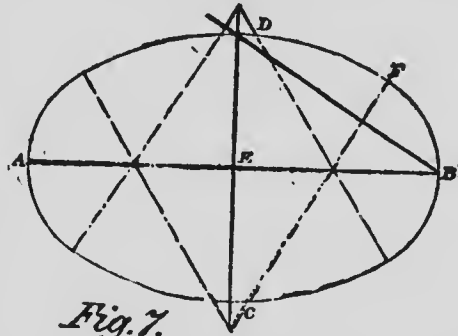


*Fig. 7.*

strike the arcs NM and KL respectively, thus completing the figure. Another method in which the centers for the longer arc are outside the curve lines, is shown at Fig. 7. Let AB be the length and CD the breadth; join BD through the center of the line EB, and at


right angles to BD draw the line CF indefinitely; then at the points of intersection of the dotted lines will be found the points to describe the required ellipse.

A method of describing an ellipse by the intersection of lines is shown at Fig. 8, and which may be applied to any kind of an ellipse with longer or shorter axis. Let WX be the given major axis, and YA the minor axis drawn at right angles to and at the center of each other.

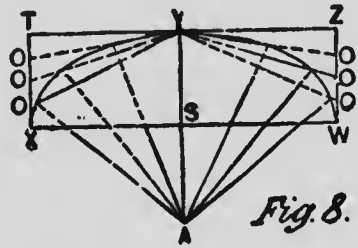

*Fig. 8.*

Through Y parallel to WX draw ZT, parallel to AY, draw WZ and XT; divide WZ and XT into any number of equal parts, say four, and draw lines from the points

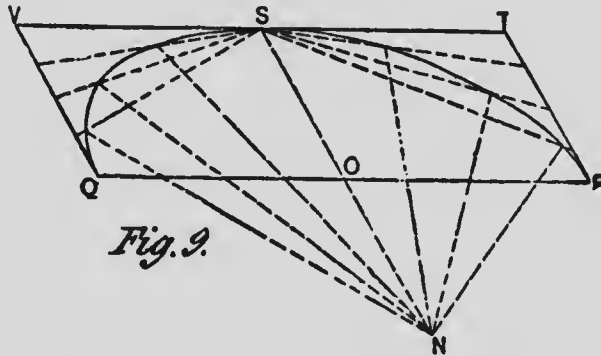


*Fig. 9.*

of division OOO, etc., to Y. Divide WS and XS each into the same number of equal parts as WZ and XT, and draw lines from A through these last points of division intersecting the lines drawn from OOO, etc., and at these intersections trace the semi-ellipse WYX. The other half of the ellipse may be described in the same manner.

To describe an ellipse from given diameters, by intersection of lines, even though the figure be on a rake: Let SN and QP, Fig. 9, be the given diameters, drawn through the centers of each other at any required angle. Draw QV and PT parallel to SN, through S draw TV parallel to QP. Divide into any number of equal parts PT, QV, PO, and OQ; then proceed as in Fig. 8, and the work is complete

An ellipse may be described by the intersection of arcs as at Fig. 10. Lay off HG and JK as the given axes; then find the foci as described in Fig. 1. Between L and L and the center M mark any number of points at pleasure as 1, 2, 3, 4. Upon L and L with H1 for radius describe arcs at O, O, O, O; upon L and L with C1 for radius describe intersecting arcs at O, O, O, and

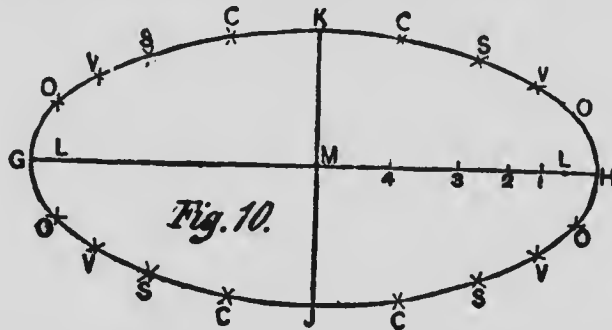


O; then these points of intersection will be in the curve of the ellipse. The other points V, S, C, are found in the same manner, as follows: For the point V take H2 for one radius, and G2 for the other; S is found by taking H3 for one radius, and G3 for the other; C is found in like manner, with H4 for one radius, and G4 for the last radius, using the foci for centers as at first. Trace a curve through the points H, O, V, S, C, K, etc., to complete the ellipse.

It frequently happens that the carpenter has to make






string, draw it to the point marked as at E, adjust two sides of your instrument to correspond with the lines of the string, then, from the point marked, draw a

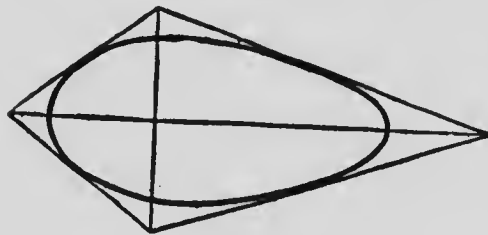

line passing through the two angles, E and e, and the line Ee will be the normal or the radial line sought."

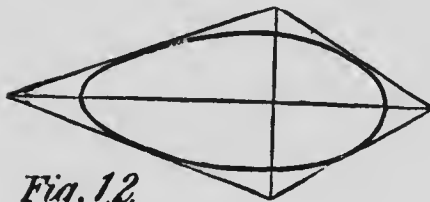

*Fig. 12.*

The oval is not an ellipse, nor are any of the figures obtained by using the compasses, as no part of an ellipse is a circle, though it


may approach closely to it. The oval may sometimes be useful to the carpenter, and it may be well to illustrate one or two methods by which these figures may be described.

Let us describe a diamond or lozenge-shaped figure, such as shown at Fig. 12, and then trace a curve inside of it as shown, touching the four sides of the figure, and a beautiful egg-shaped curve will be formed. For effect we may elongate the lozenge or shorten it at will, placing the short diameter at any point. This form of oval is much used by turners and lathe men generally, in the formation of pillars, balusters, newel-posts and turned ornamental work generally.

An egg-shaped oval may also be inscribed in a figure having two unequal but parallel sides, both of which

are bisected by the same line, perpendicular to both as shown in Fig. 13. These few examples are quite sufficient to satisfy the requirements of the workman, as they give the key by which he may construct any oval he may ever be called upon to form.

I have dwelt rather lengthily on the subject of the ellipse because of its being rather difficult for the workman to deal with, and it is meet he should acquire a fair knowledge of the methods of constructing it. It is not my province to enter into all the details of the properties of this very intersecting figure, as the workman can find many of these in any good work on mensuration, if he should require more. I may say here, however, that geometricians so far have failed to discover




*Fig. 13.*

any scientific method of forming parallel ellipses, so that while the inside or outside lines of an ellipse can be obtained by any of the methods I have given, the parallel line must be obtained either by gauging the width of the material or space required, or must be obtained by "pricking off" with compasses or other aid. I thought it best to mention this as many a young man has spent hours in trying to solve the unsolvable problem when using the pins, pencil and string.

There are a number of other curves the carpenter will sometimes meet in daily work, chief among these being the scroll or spiral, so it will be well for him to have some little knowledge of its structure. A true spiral can be drawn by unwinding a piece of string that

has been wrapped around a cone, and this is probably the method adopted by the ancients in the formation of the beautiful Ionic spirals they produce<sup>1</sup> A spiral

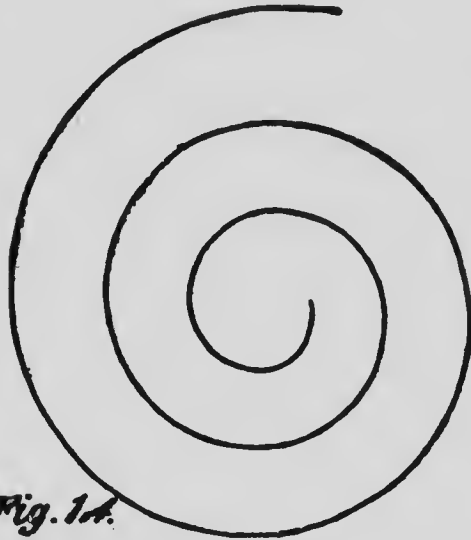

*Fig. 14.*

drawn by this method is shown at Fig. 14. This was formed by using two lead-pencils which had been sharpened by one of those patent sharpeners and which gave them the shape seen in Fig. 15. A piece of string was then tied tightly around the pencil, and one end was wound round the conical end, so as to lie in notches made in one of the pencils; the point of a second pencil was pierced through the string at a convenient point near the first pencil, completing the arrangement shown in Fig. 15. To draw the spiral the pencils must be kept vertical, the point of the first being held firmly in the hole of the spiral, and the second pencil must then be carried around the first, the distance between the two increasing regularly, of course, as the string unwinds.



*Fig. 15.*

This is a rough-and-ready apparatus, but a true

spiral can be described by it in a very few minutes. By means of a larger cone, spirals of any size can, of course, be drawn, and that portion of the spiral can be used which conforms to the required height.

Another similar method is shown in Fig. 16, only in this case the string unwinds from a spool on a fixed center A, D, B. Make loop E in the end of the thread, in which place a pencil as shown. Hold the spool firmly and move the pencil around it, unwinding the thread.

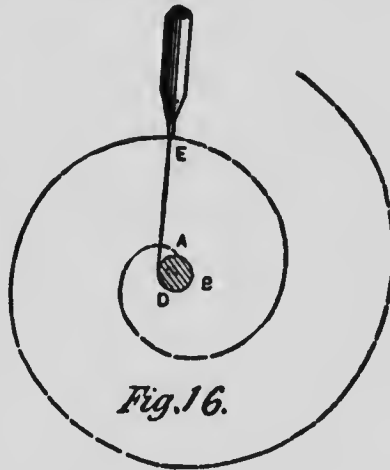


Fig. 16.

A curve will be described, as shown in the lines. It is evident that the proportions of the figure are determined by the size of the spool. Hence

a larger or smaller spool is to be used, as circumstances require.

A simple method of forming a figure that corresponds to the


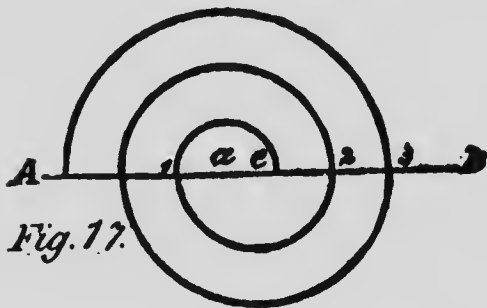


Fig. 17.

spiral somewhat, is shown in Fig. 17. This is drawn from two centers only, a and e, and if the distance between these centers is not too great, a fairly smooth appearance will be given to the figure. The method

of describing is simple. Take  $a_1$  as radius and describe a semi-circle; then take  $e_1$  and describe semi-circle  $1_2$  on the lower side of the line  $AB$ . Then with  $a_2$  as radius describe semi-circle above the line; again, with  $e_3$  as radius, describe semi-circle below the line  $AB$ ; lastly with  $a_3$  as radius describe semi-circle above the line.

In the spiral shown at Fig. 18 we have one drawn in a scientific manner, and which can be formed to

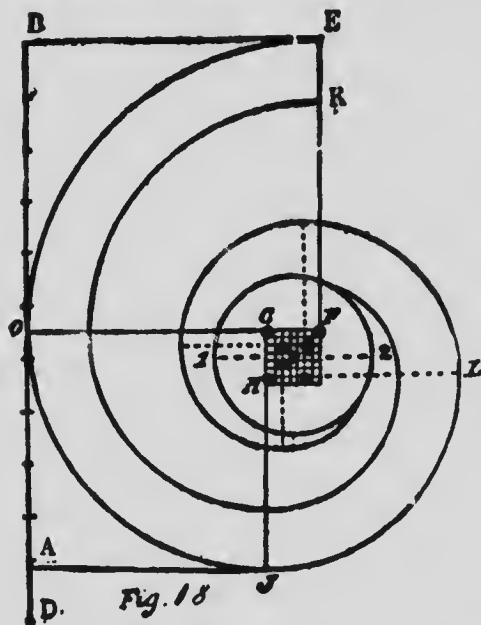

dimensions. To draw it, proceed as follows: Let  $BA$  be the given breadth, and the number of revolutions, say one and three-fourths; now multiply one and three-fourths by four, which equals seven; to which add three, the number of times a side of a square is contained in the diameter of the eye, making ten in

all. Now divide  $AB$  into ten equal parts and set one from  $A$  to  $D$ , making eleven parts. Divide  $DB$  into two equal parts at  $O$ , then  $OB$  will be the radius of the first quarter  $OF$ ,  $FE$ ; make the side of the square, as shown at  $GF$ , equal to one of the eleven parts, and divide the number of parts obtained by multiplying the revolutions by four, which is seven; make the

diameter of the eye, 12, equal to three of the eleven parts. With F as a center and E as a radius make the quarter EO; then, with G as a center, and GO as a radius, mark the quarter OJ. Take the next center at H and HJL in the quarter; so keep on for centers, dropping one part each time as shown by the dotted angles. Let EK be any width desired, and carry it around on the same centers.


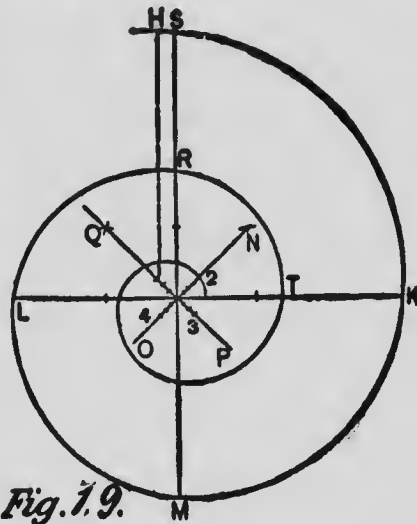


Fig. 7.9.

Another method of obtaining a spiral by arcs of circles is shown at Fig. 19, which may be confined to given dimensions. Proceed as follows: Draw SM and LK at right angles; at the intersection of these lines bisect the angles by the lines NO and QP; and on NO and QP from the intersection each way set off three equal parts as shown. On 1 as center and IH as radius, describe the arc HK, on 2 describe the arc KM, on 3 describe the arc ML, on 4 describe the arc LR. The fifth center to describe the arc RT is under 1 on the line QP; and so proceed to complete the curve.

There are a few other curves that may occasionally prove useful to the workman, and I submit an example or two of each in order that, should occasion arise where such a curve or curves are required, they may be met with a certain amount of knowledge of the subject.

The first is the parabola, a curve sometimes used in bridge work or similar construction. Two examples of the curve are shown at Fig. 20, and the methods of describing them.

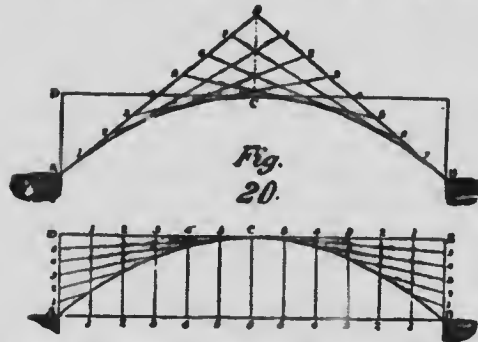

The upper one is drawn as follows:

1. Draw C8 perpendicular to AB, and make it equal to AD.

Next, join A8 and B8, and divide both lines into the

same number of equal parts, say 8; number them as in the figure; draw 1, 1-2, 2-3, 3, etc., then these lines will be tangents to the curve; trace the curve to touch the center of each of those lines between the points of intersection.

The lower example is described thus: 1. Divide AD and BE, into any number of equal parts; CD and CE into a similar number.

2. Draw 1, 1-2, 2, etc., parallel to AD, and from the points of division in AD and BE, draw lines to C. The points of intersection of the respective lines are points in the curve.


The curves found, as in these figures, are quicker at the crown than a true circular segment; but, where the rise of the arch is not more than one-tenth of the span, the variation cannot be perceived.

A raking example of this curve is shown in Fig. 21 and the method of describing it: Let AC be the ordinate or vertical line, and DB the axis, and B its vertex; produce the axis to E, and make BE equal to DB; join EC, EA, and divide them each into the same number




of equal parts, and number the divisions as shown on the figures. Join the corresponding divisions by the lines 11, 22, etc., and their intersections will produce the contour of the curve.

The hyperbola is somewhat similar in appearance to the parabola but it has properties peculiar to itself. It is a figure not much used in carpentry, but it may

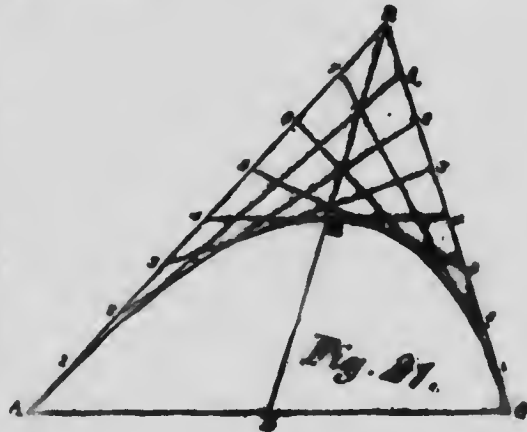

be well to refer to it briefly:

Suppose there be two right equal cones, Fig. 22, having the same axis, and cut by a plane  $Mn$ ,  $Nm$ , parallel to that axis, the sections  $MAN$ ,  $mna$ , which result, are hyperbolas. In place of two cones opposite to each other, geometricians sometimes suppose four cones, which join on the lines  $EH$ ,  $GB$ , Fig. 23, and of which axis form two right lines,  $Ff$ ,  $F'f'$ , crossing the center  $C$  in the same plane.

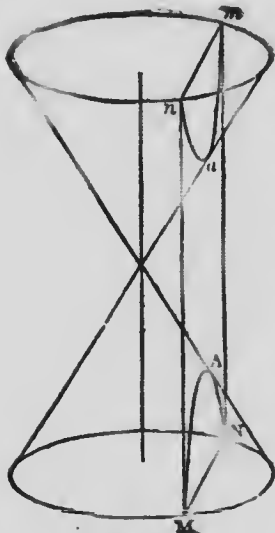


*Fig. 22.*

To describe a cycloid: The cycloid is the curve described by a point in the circumference of a circle and its

1. Let GH, Fig. 24, be the edge of a straight ruler, and C the center of the generating circle.

2. Through C draw the diameter AB perpendicular to GH, and EF parallel to GH; then AB is the height of the curve, and EF is the place of the center of the generating circle at every point of its progress.

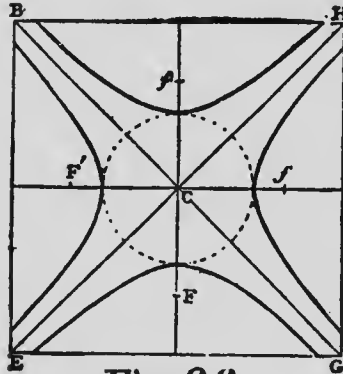


*Fig. 23.*

3. Divide the semi-circumference from B to A into any number of equal parts, say 8, and from A draw chords to the points of division.

4. From C, with a space in the dividers equal to one of the divisions on the circle, step off on each side the same number of spaces as the semi-circumference is divided into, and through the points draw perpendiculars to GH; number them as in the diagram.

5. From the points of division in EF with the

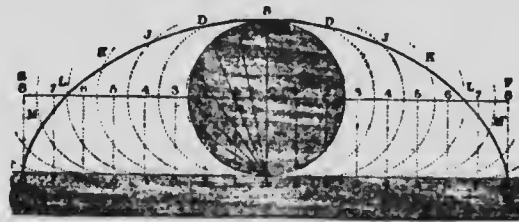

*Fig. 24.*


radius of the generating circle, describe indefinite arcs as shown by the dotted lines.

6. Take the chord AI in the dividers, and with the foot at I and I on the line GH, cut the indefinite arcs

described from 1 and 1 respectively at D and D', then D and D' are points in the curve.

7 With the chord A2, from 2 and 2 in GH, cut the indefinite arcs in J and J', with the chord A3, from 3 and 3, cut the arcs in K and K' and apply the other chords in the same manner, cutting the arcs in LM, etc.

8. Through the points so found trace the curve.

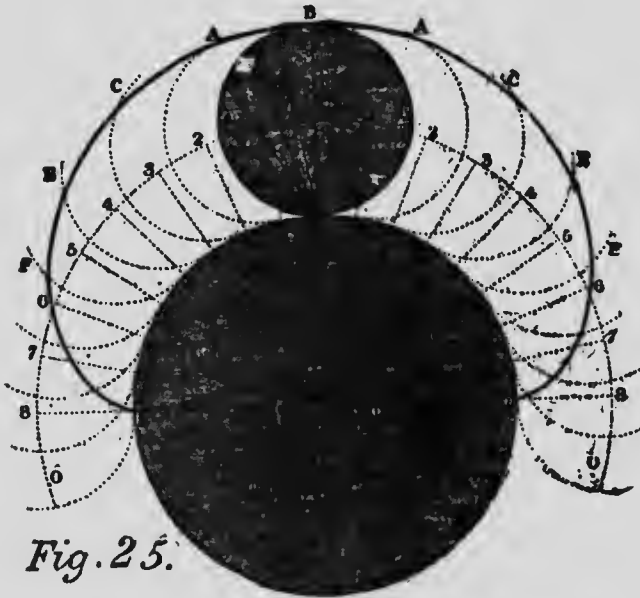

Each of the indefinite arcs in the diagram represents the circle at that point of its revolution, and the points D, J, K, etc., the position of the generating point B at each place. This curve is frequently used for the arches of bridges, its proportions are always constant, viz.: the span is equal to the circumference of the generating circle and the rise equal to the diameter. Cycloidal arches are frequently constructed which are

not true cycloids, but approach that curve in a greater or less degree.

The epicycloidal curve is formed by the revolution of a circle round a circle, either within or without its circumference, and described by a point B, Fig. 25, in the circumference of the revolving circle, and Q of the stationary circle.

The method of finding the points in the curve is here given:

1. Draw the diameter 8, 8 and from Q the center, draw QB at right angles to 8, 8.

2. With the distance QP from Q, describe an arc O, O representing the position of the center P throughout its entire progress.

3. Divide the semi-circle BD and the quadrants D8 into the same number of equal parts, draw chords from D to 1, 2, 3, etc., and from Q draw lines through the divisions in D8 to intersect the curve OO in 1, 2, 3, etc.

4. With the radius of P from 1, 2, 3, etc., in OO, describe indefinite arcs; apply the chords D1, D2, etc. from 1, 2, 3, etc., in the circumference of Q, cutting the indefinite arcs in A, C, E, F, etc., which are points in the curve.

We are now in a position to undertake actual work, and in the next chapter, I will endeavor to apply a part of what has preceded to practical examples, such as are required for every-day use. Enough geometry has been given to enable the workman, when he has mastered it all, to lay out any geometrical figure he may be called upon to execute; and with, perhaps, the exception of circular and elliptical stairs and hand-railings, which require a separate study, by what has been formulated and what will follow, he should be able to execute almost any work in a scientific manner, that may be placed under his control.

## PART II

### PRACTICAL EXAMPLES

#### CHAPTER I

We are now in a position to undertake the solution of practical examples, and I will commence this department by offering a few practical solutions that will bring into use some of the work already known to the student, if he has followed closely what has been presented.

It is a part of the carpenter's duty to lay out and construct all the wooden centers required by the bricklayer and mason for turning arches over openings of all kinds; therefore, it is essential he should know as much concerning arches as will enable him to attack the problems with intelligence. I have said something of arches, in Part I, but not sufficient to satisfy all the needs of the carpenter, so I supplement with the following on the same subject: Arches used in building are named according to their curves,—circular, elliptic, cycloid, parabolic, hyperbolic, etc. Arches are also known as three or four centered arches. Pointed arches are called lancet, equilateral and depressed. Voussoirs is the name given to the stones forming the arch; the central stone is called the keystone. The highest point in an arch is called the crown, the lowest the springing line, and the spaces between the crown and springing line on either side, the haunches or flanks. The under, or concave, sur-

face of an arch is called the intrados or soffit, the upper or convex surface is called the extrados. The span of an arch is the width of the opening. The supports of an arch are called abutments, piers, or




Fig. 1.




Fig. 2

springing walls. This applies to the centers of wood, as well as to brick, stone or cement. The following six illustrations show the manner of getting the curves, as well as obtaining the radiating lines, which, as a rule, the carpenter will be asked to prepare for the mason. We take them in the following order:

**Fig. 1. A Semi-circular Arch.**—RQ is the span, and the line RQ is the springing line; S is the center from




Fig. 3.




Fig. 4.

which the arch is described, and to which all joints of the voussoirs tend. T is the keystone of the arch.

**Fig. 2. A Segment Arch.**—U is the center from which the arch is described, and from U radiate all

the joints of the arch stones. The bed line of the arch OP or MN is called by mason builders a skew-back. OM is the span, and VW is the height or versed sine of the segment arch.

**Figs. 3 and 4. Moorish or Saracenic Arches**, one of which is pointed. Fig. 3 is sometimes called the horseshoe arch. The springing lines DC and ZX of both arches are below the centers BA and Y.




Fig. 5

**Fig. 5. A Form of Lintel Called a Platband**, built in this form as a substitute for a segment arch over the opening of doors or windows, generally of brick, wedge-shaped.

**Fig. 6. The Elliptic Arch.**—This arch is most perfect when described with the trammel, and in that case



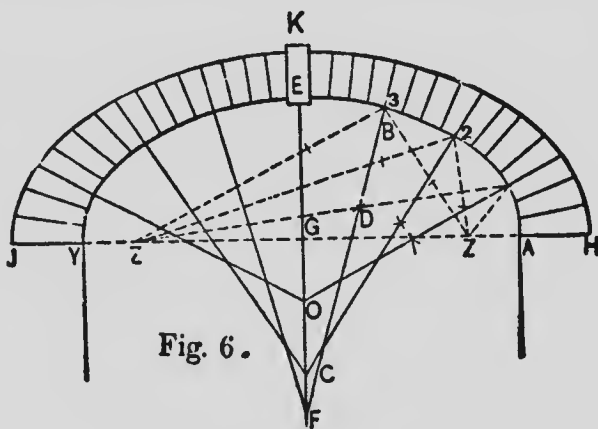


Fig. 6.

the joints of the arch stones are found as follows: Let ZZ be the foci, and B a point on the intrados where a joint is required; from ZZ draw lines to B, bisect the angle at B by a line drawn through the intersecting arcs D produced for the joint to F. Joints at 1 and 2



are found in the same manner. The joints for the opposite side of the arch may be transferred as shown. The semi-axes of the ellipse, HG, GK, are in the same ratio as GE to GA. The voussoirs near the springing



line of the arch are thus increased in size for greater strength. I gave a very good description of this latter arch in Part I, which see.

Another series of arches, known as Gothic arches, are shown as follows, with all the centers of the curve given, so that their formation is rendered quite simple. The arch shown at Fig. 7 is equilateral and its outlines have been shown before. I repeat, however, let AB be the given span; on A and B as centers with AB as radius, describe the arcs AC and BC.

The lancet arch, Fig. 8, is drawn as follows: DE is the given span; bisect DE in J, make DF and EG equal DJ; on F as center with FE as radius describe





the arc EH, and on G as center describe the arc DH.

A lancet arch, not so acute as the previous one, is



shown at Fig. 9. Let  $KL$  be the given span; bisect  $KL$  in  $M$ , make  $MP$  at right angles to  $KL$  and of the required height; connect  $LP$ , bisect  $LP$  by a line through the arcs  $R, Q$  produced to  $N$ ; make  $MO$  equal  $MN$ ; with  $N$  and  $O$  as centers, with  $NL$  for radius describe the arcs  $KP$  and  $LP$ . Fig. 10 shows a low or drop arch, and is obtained as follows: Let  $ST$  be the given span, bisect  $ST$  in  $W$ ; let  $WX$  be the required height at right angles to  $TS$ ; connect  $TX$ ,

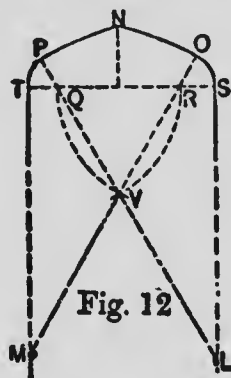

bisect  $TX$  by a line through the arcs  $YZ$  produced to  $V$ , make  $TU$  equal  $SV$ ; on  $V$  and  $U$  as centers with  $VT$  as radius describe the arcs  $TX$  and  $SX$ . Another Gothic arch with a still less height is shown at Fig. 11. Suppose  $AB$  to be the given span; then divide  $AB$  into four equal parts; make  $AF$  and  $BG$  equal  $AB$ , connect  $FE$  and produce to  $D$ ; with  $CA$  as radius, on  $C$  and  $E$ , describe the arcs  $AD$  and  $BK$ ; on  $F$  and  $G$  as centers, describe the arcs  $JK$  and  $DK$ .

Another four-centered arch of less height is shown at Fig. 12. Let  $SI$  be the given span, divide into six equal parts; on  $R$  and  $Q$  as centers with  $RQ$  as radius describe the arcs  $QV$  and  $RV$ , connect  $QV$  and  $RV$  and produce to  $L$  and  $M$ ; on  $R$  and  $Q$  as centers with  $QT$  as

radius describe the arcs TP and SO; on L and M as centers describe the arcs PN and ON.

To describe an equilateral Ogee arch, like Fig. 13, proceed as follows: Make YZ the given span; make




Fig. 13




Fig. 14

YX equal YZ, bisect YZ in A; on A as center with AY as radius describe the arcs YB and ZC; on B and X as centers describe the arcs BD and XD, and on C and X as centers describe the arcs CE and XE, on E and D as centers describe the arcs BX and CX.

Fig. 14 shows the method of obtaining the lines for an Ogee arch, having a height equal to half the span. Suppose FH to be the span, divide into four equal parts, and at each of the points of division draw lines LN, KG and JO at right angles to FH; with LF for radius on L and J describe the quarter circles FM and HP; and with the same radius on O and N describe the quarter circles PG and MG.

These examples—all or any of them—can be made use of in a great number of instances. Half of the Ogee curve is often employed for veranda rafters, as for the roofs of bay-windows, for tower roofs and for bell bases, for oriel and bay-windows, and many other pieces of work the carpenter will be confronted with from time to time. They also have value as aids in forming mouldings and other ornamental work, as for

example Fig. 15, which shows a moulding for a base or other like purpose. It is described as follows: Draw AB; divide it into five equal parts; make CD equal to four of these. Through D draw DF parallel with AB. From D, with DC as radius, draw the arc CE. Make EF equal to DE; divide EF into five parts; make the line above F equal to one of these; draw FG equal to six of these. From G, with radius DE, describe the arc; bisect GF, and lay the distance to H. It is the center of the curve, meeting the semi-circle described from M. Join NO, OS, and the moulding is complete.

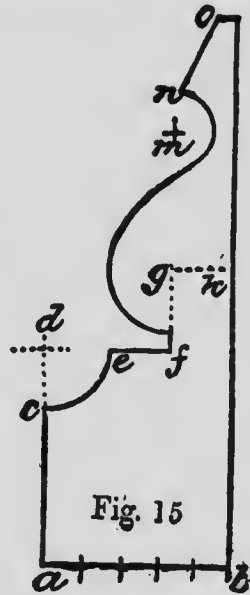



Fig. 15

The two illustrations shown at Figs. 16 and 17 will give the student an idea of the manner in which he can apply the knowledge he has now obtained, and it may not be out of place to say that with a little ingenuity he can form almost any sort of an ornament he wishes by using this knowledge. The two illustrations require no explanation as their formation is self-evident. Newel posts, balusters, pedestals and other turned or wrought ornaments, may be designed easily if a little thought be brought to bear on the subject.

The steel square is a great aid in working out problems in carpentry, and I will endeavor to show, as briefly as possible, how the square can be applied to some difficult problems, and insure correct solutions.

It is unnecessary to give a full and complete description of the steel square. Every carpenter and joiner is

supposed to be the possessor of one of these useful tools, and to have some knowledge of using it. It is not everyone, however, who thoroughly understands its powers or knows how to employ it in solving all

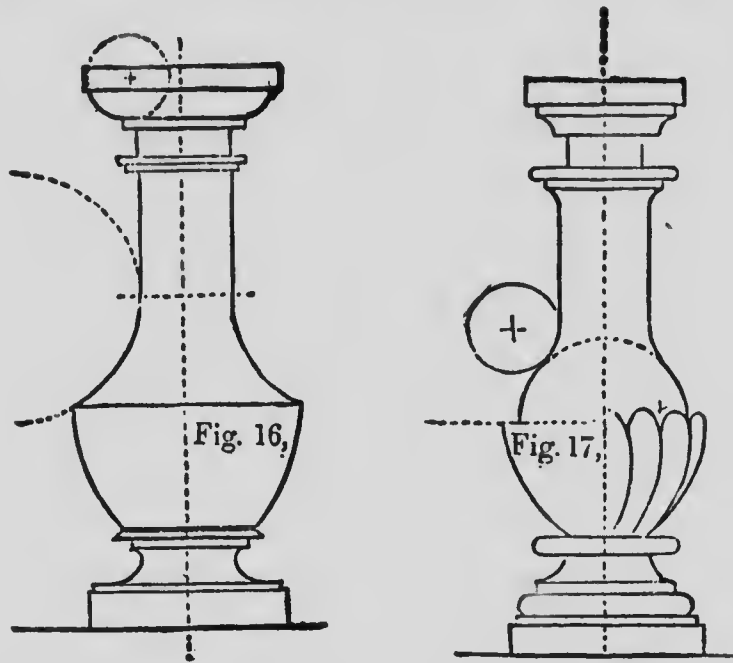

the difficulties of framing, or to take advantage of its capabilities in laying out work. While it is not my intention to go deeply into this subject in this volume, as that would lengthen it out to unreasonable limits, so it must be left for a separate work, yet there are some simple things connected with the steel square, that I think every carpenter and joiner should know, no matter whether he intends to go deeper into the study of the steel square or not. One of these things is the learning to read the tool. Strange as it may

appear, not over one in fifty of those who use the square are able to read it, or in other words, able to explain the meaning and uses of the figures stamped on its two sides. The following will assist the young fellows who want to master the subject.

The square consists of two arms, at right angles to each other, one of which is called the blade and which is two feet long, and generally two inches wide. The other arm is called the tongue, and may be any length from twelve to eighteen inches, and  $1\frac{1}{4}$  to 2 inches in width. The best square has always a blade 2 inches wide. Squares made by firms of repute are generally perfect and require no adjusting or "squaring."

The lines and figures formed on squares of different make sometimes vary, both as to their position on the square and their mode of application, but a thorough understanding of the application of the scales and lines shown on any first-class tool, will enable the student to comprehend the use of the lines and figures exhibited on any good square.

It is supposed the reader understands the ordinary divisions and subdivisions of the foot and inch into twelfths, inches, halves, quarters, eighths and sixteenths, and that he also understands how to use that part of the square that is subdivided into twelfths of an inch. This being conceded, we now proceed to describe the various rules as shown on all good squares. Sometimes the inch is subdivided into thirty-seconds, in which the subdivision is very fine, but this scale will be found very convenient in the measurement of drawings which are made to a scale of half, quarter, one-eighth or one-sixteenth of an inch to a foot.

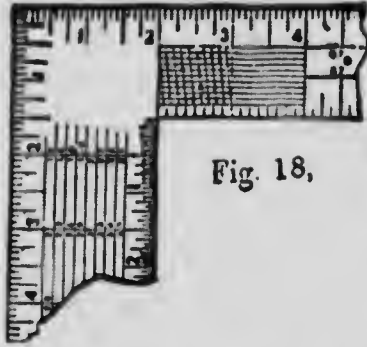


Fig. 18,

In the illustration Fig. 18, will be noticed a series of lines extending from the junction of the blade and tongue to the four-inch limit. From the figures 2 to 3 these lines are crossed by diagonal lines. This figure, reaching from 2 to 4, is called a diagonal scale, and is

intended for taking off hundredths of an inch. The

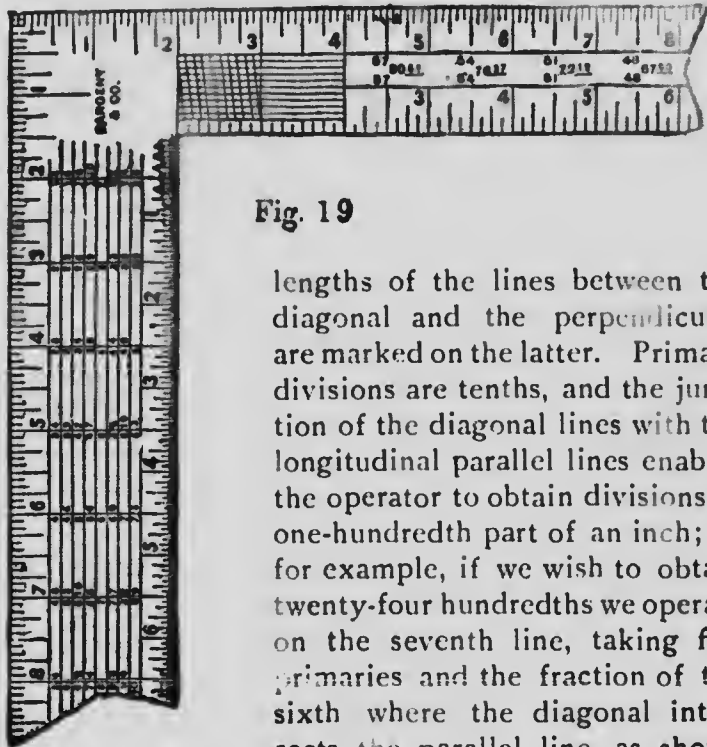


Fig. 19

lengths of the lines between the diagonal and the perpendicular are marked on the latter. Primary divisions are tenths, and the junction of the diagonal lines with the longitudinal parallel lines enables the operator to obtain divisions of one-hundredth part of an inch; as for example, if we wish to obtain twenty-four hundredths we operate on the seventh line, taking five primaries and the fraction of the sixth where the diagonal intersects the parallel line, as shown

by the "dots" on the compasses, and this gives us the distance required.

The use of the scale is obvious, and needs no further explanation, as the dots or points are shown.

The lines of figures running across the blade of the square, as shown in Fig. 19, forms what is a very convenient rule for determining the amount of material in length or width of stuff. To use it proceed as follows: If we examine we will find under the figure 12, on the outer edge of the blade, where the length of the boards, plank or scantling to be measured is given, and the answer in feet and inches is found under the inches in width that the board, etc., measures. For example, take a board nine feet long and five inches wide, then under the figure 12, on the second line, will be found the figure 9, which is the length of the board; then run along this line to the figure directly under the five inches (the width of the board) and we find three feet nine inches, which is the correct answer in 'board measure.' If the stuff is three inches thick it is tripled, etc., etc. If the stuff is longer than any figures shown on the square it can be measured as above and doubling the result. This rule is calculated, as its name indicates, for board measure, or for surfaces 1 inch in thickness. It may be advantageously used, however, upon timber by multiplying the result of the face measure of one side of a piece by its depth in inches. To illustrate, suppose it be required to measure a piece 25 feet long, 10x14 inches in size. For the length we will take 12 and 13 feet. For the width we will take 10 inches, and multiply the result by 14. By the rule a board 12 feet long and 10 inches wide contains 10 feet, and one 13 feet long and 10 inches wide, 10 feet 10 inches. Therefore, a board 25 feet long and 10 inches wide must contain 20 feet and

10 inches. In the timber above described, however, we have what is equivalent to 14 such boards, and therefore we multiply this result by 14, which gives 291 feet and 8 inches the board measure.

Along the tongue of the square following the diagonal scale is the brace rule, which is a very simple and very convenient method of determining the length of any brace of regular run. The length of any brace simply represents the hypotenuse of a right-angled triangle. To find the hypotenuse extract the square root of the sum of the squares of the perpendicular and horizontal runs. For instance, if 6 feet is the horizontal run and 8 feet the perpendicular, 6 squared equals 36, 8 squared equals 64; 36 plus 64 equals 100, the square root of which is 10. These are the rules generally used for squaring the frame of a building.

If the run is 42 inches, 42 squared is 1764, double that amount, both sides being equal, gives 3528, the square root of which is, in feet and inches, 4 feet 11.40 inches.

In cutting braces always allow in length from a sixteenth to an eighth of an inch more than the exact measurement calls for.


Directly under the half-inch marks on the outer edge of the back of the tongue, Fig. 19, will be noticed two figures, one above the other. These represent the run of the brace, or the length of two sides of a right-angled triangle; the figures immediately to the right represent the length of the brace or the hypotenuse. For instance, the figures  $5\frac{1}{2}$ , and 80.61 show that the run on the post and beam is 57 inches, and the length of the brace is 80.61 inches.

Upon some squares will be found brace measurements given, where the run is not equal, as  $1\frac{1}{4}$ .30. It will be noticed that the last set of figures are each just



three times those mentioned in the set that are usually used in squaring a building. So if the student or mechanic will fix in his mind the measurements of a few runs, with the length of braces, he can readily work almost any length required.

Take a run, for instance, of 9 inches on the beam and 12 inches on the post. The length of

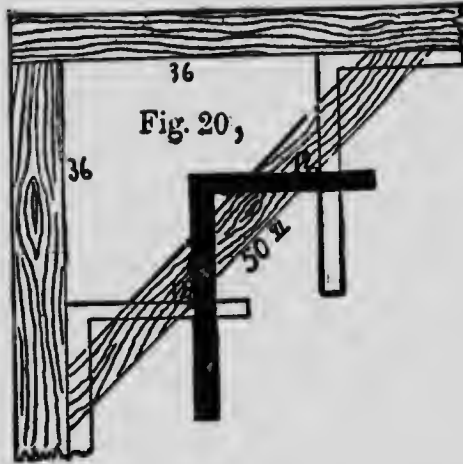

brace is 15 inches. In a run, therefore, of 12, 16, 20, or any number of times above the figures, the length of the brace will bear the same proportion to the run as the multiple used. Thus if you multiply all the figures by 3 you will have 36 and 48 inches for the run, and 60 inches for the brace, or to remember still more easily, 3, 4 and 5 feet.

There is still another and an easier method of obtaining the lengths of braces by aid of the square, also the bevels as may be seen in Fig. 20, where the run is 3 feet, or 36 inches, as marked. The length and bevels of the brace are found by applying the square three times in the position as shown; placing 12 and 12 on the edge of the timber each time. By this method both length and bevel are obtained with the least amount of labor. Braces having irregular runs may be operated in the same manner. For instance, suppose we wish to set in a brace where the run is 4 feet and 3 feet; we simply take 9 inches on the

tongue and 12 inches on the blade and apply the

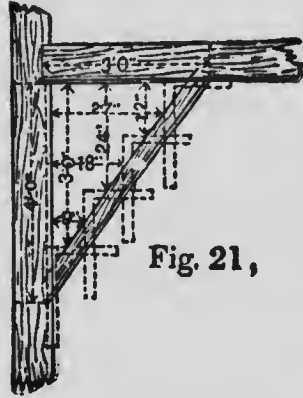


Fig. 21,

square four times, as shown in Fig. 21, where the brace is given in position. Here we get both the proper length and the exact bevels. It is evident from this that braces, regular or irregular, and of any length, may be obtained with bevels for same by this method, only care must be taken in adopting the figures for the purpose.

If we want a brace with a two-foot run and a four-foot run, it must be evident that as two is the half of four, so on the square take 12 inches on the tongue, and 6 inches on the blade, apply four times and we have the length and the bevels of a brace for this run.

For a three-by-four foot run take 12 inches on the tongue and 9 inches on the blade, and apply four times, because as 3 feet is  $\frac{3}{4}$  of four feet, so 9 inches is  $\frac{3}{4}$  of 12 inches.

While on the subject of braces I submit the following table for determining the length of braces for any run from six inches to fourteen feet. This table has been carefully prepared and may be depended upon as giving correct measurements. Where the runs are regular or equal the bevel will always be a miter or angle of  $45^\circ$ , providing always the angle which the brace is to occupy is a right angle—a "square." If the run is not equal, or the angle not a right angle, then the bevels or "cuts" will not be miters, and will have to be obtained either by taking figures on the square or by a scaled diagram.



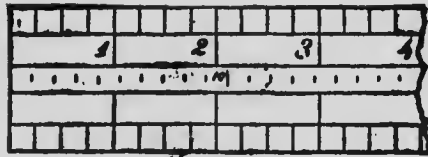


Fig. 22.

There is on the tongue of the square a scale called the "octagonal scale." This is generally on the opposite side to the scales shown on Fig. 19. Fig. 22 exhibits a portion of the tongue on which this scale is shown. It is the central division on which the number 10 is seen along with a number of divisions. It is used in this way: If you have a stick 10 inches square which you wish to dress up octagonal, make a center mark on each face, then with the compasses, take 10 of the spaces marked by the short cross-lines in the middle of the scale, and lay off this distance each side of the center lines, do the same at the other end of the stick, and strike a chalk line through these marks. Dress off the corners to the lines, and the stick will be octagonal. If the stick is not straight it must be gauged, and not marked with the chalk line. Always take a number of spaces equal to the square width of the octagon in inches. This scale can be used for large octagons by doubling or trebling the measurements.

On some squares, there are other scales, but I do not advise the use of squares that are surcharged with too many scales and figures, as they lead to confusion and loss of time.


It will now be in order to offer a few things that can be done with the steel square, in a shorter time than by applying any other methods. If we wish to get the



Fig. 23.

length and bevels for any common rafter it can be done on short notice by using the square as shown in Fig. 23. The pitch of the roof will, of course, govern the figures to be employed on the blade and tongue. For a quarter pitch, the figures must be 6 and 12. For half pitch, 12 and 12 must be used. For a steeper pitch, 12 and a larger figure must be used according to the pitch required. For the lower pitches, 8 and 12 gives a one-third pitch and 9 and 12 a still steeper pitch; and from this the workman can obtain any pitch he requires. If the span is 24 feet, the square must be applied 12 times, as 12 is half of 24. And so with any other span: The square must be applied half as many times as there are feet in the width. This is self-evident. The bevels and lengths of hip and valley rafters may be obtained in a similar manner, by first taking the length of the diagonal line between 12 and 12, on the square, which is 17 inches in round numbers. Use this figure on the blade, and the "rise" whatever that may be, on the tongue. Suppose we have a roof of one-third pitch, which has a span of 24 feet; then 8, which is one-third of 24, will be the height of the roof at the point or ridge, from the base of the roof on a line with the plates. For example, always use 8, which is one-third of 24, on tongue for altitude; 12, half the width of 24, on blade for base. This cuts common rafter. Next is the hip rafter. It must be understood that the diagonal of 12 and 12 is 17 in framing, as before stated, and the hip is the diagonal of a square added to the rise of roof; therefore we take 8 on tongue and 17 on blade; run the same number of times as common rafter. To cut jack rafters, divide the number of openings for common rafter. Suppose we have 5 jacks, with six open-

ings, our common rafter 12 feet long, each jack would be 2 feet shorter, first 10 feet, second 8 feet, third 6 feet, and so on. The top down cut the same as cut of common rafter; foot also the same. To cut miter to fit hip: Take half the width of building on tongue and length of common rafter on blade; blade gives cut. Now find the diagonal of 8 and 12, which is  $14\frac{1}{2}$ , take 12 on tongue,  $14\frac{1}{2}$  on blade; blade gives cut. The hip rafter must be beveled to suit; height of hip on tongue, length of hip on blade; tongue gives bevel. Then we take 8 on tongue,  $8\frac{3}{4}$  on blade; tongue gives the bevel. Those figures will span all cuts in putting on cornice or sheathing. To cut bed moulds for gable to fit under cornice, take half width of building on

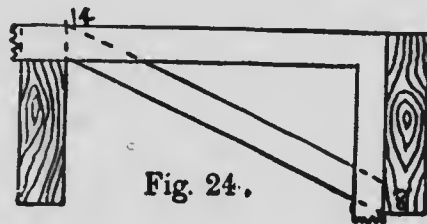

tongue, length of common rafter on blade; blade gives cut; machine mouldings will not member, but this gives a solid joint; and to member properly it

is necessary to make moulding by hand, the diagonal plumb cut differences. To cut planceer to run up valley, take height of rafter on tongue, length of rafter on blade; tongue gives cut. The plumb cut takes the height of hip rafter on tongue, length of hip rafter on blade; tongue gives cut. These figures give the cuts for one-third pitch only, regardless of width of building. The construction of roofs generally will be taken up in another chapter.

A ready way of finding the length and cuts for cross-bridging is shown at Fig. 24. If the joists are 8 inches wide and 16 inches centers, there will be 14 inches

between. Place the square on 8 and 14, and cut on 8, and you have it. The only point to observe is that the 8 is on the lower side of the piece of bridging, while the 14 is on the upper, and not both on same side of timber, as in nearly all work. Bridging for any depth of joists, to any reasonable distance of joists apart, may be obtained by this method. A quick way of finding the joists for laying out

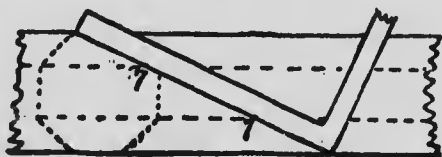


Fig. 25.

timber to be worked from the square to an octagon section is shown at Fig. 25. Lay your square diagonally across your timber and mark at 7 and 17, which gives corner of octagon. The figures 7 and 17, on either a square or two-foot pocket rule, when laid on a board or piece of timber as shown, always define the points where the octagonal angle or arris should be.

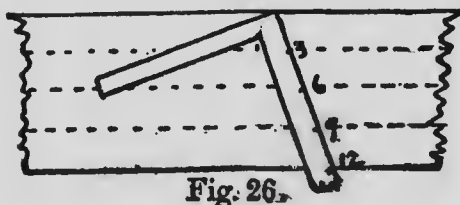


Fig. 26.

Fig. 26 shows a rapid method of dividing anything into several equal parts. If the board is  $10\frac{1}{2}$  inches wide, lay the square from

heel to 12, and mark at 3, 6 and 9, and you have it divided into four equal parts. Any width of board or any number of parts may be worked with accuracy under the same method.

A method for obtaining the "cuts" for octagon and hexagon joints is shown at Fig. 27. Lay off a quarter circle XA, with C as a center; then along the horizontal line AB the square is laid with 12" on the blade

at the center *C*, from which the quadrant was struck. If we divide this quadrant into halves, we get the point *E*, and a line drawn from 12" on the blade of the square and through the point *E*, we cut the tongue of the square at 12" and through to *O*, and the line thus drawn makes an angle of  $45^\circ$ , a true miter. If we divide the quadrant between *E* and *X*, and then draw a line from *C*, and 12" on the blade of the square, cutting the dividing point *D*, we get the octagon cut, which is the line *DC*. Again, if we divide the space

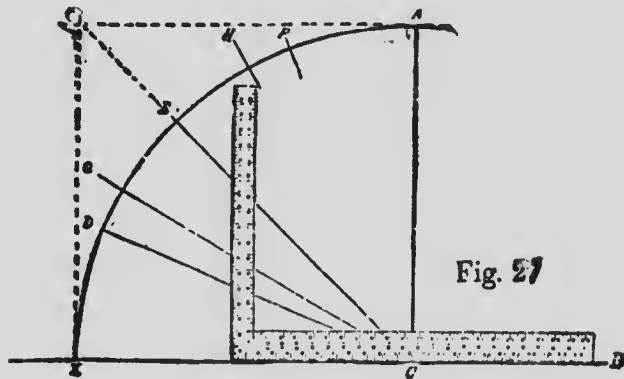



Fig. 27

between *E* and *X* into three equal parts, making *GC* one of these parts, and draw a line from *C* to *G* cutting the tongue of the square at 7", we get a cut that will give us a miter for a hexagon; therefore, we see from this that if we set a steel square on any straight edge or straight line, 12" and 12" on blade and tongue on the line or edge, we get a true miter by marking along the edge of the blade. For an octagon miter, we set the blade on the line at 12", and the tongue at 5", and we get the angle on the line of the blade—nearly; and, for a hexagon cut, we place the blade at 12" on the



line, and the tongue at 7", and the line of the blade gives the angle of cut—nearly. The actual figure for octagon is  $4\frac{1}{2}$ , but 5" is close enough; and for a hexagon cut, the exact figures are 12" and  $6\frac{1}{2}$ , but 12" and 7" is as near as most workmen will require, unless the cut is a very long one.

The diagram shown at Fig. 28 illustrates a method of defining the pitches of roofs, and also gives the figures on the square for laying out the rafters for such pitches. By a very common usage among carpenters and builders, the pitch of a roof is described by indicating what fraction the rise is of the span. If, for example, the span is 24 feet (and here it should be remarked that the diagram shows only one-half the span), then 6 feet rise would be called quarter pitch, because 6 is one-quarter of 24. The rule, somewhat arbitrarily expressed, that is applicable

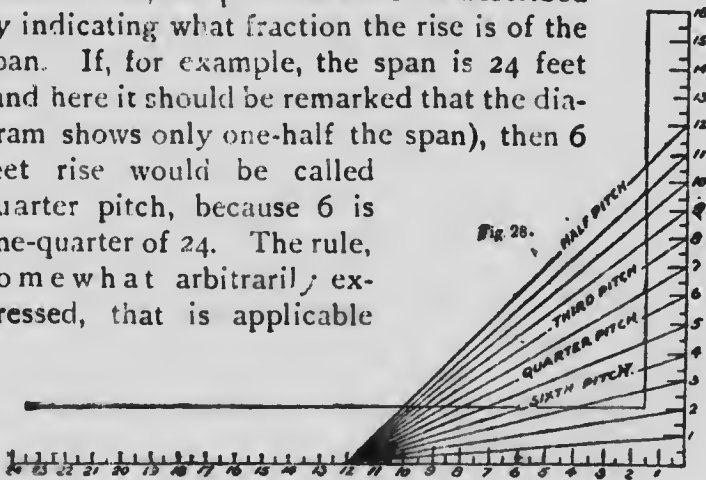

in such cases in roof framing where the roof is one-quarter pitch, is as follows: Use 12 of the blade, and 6 of the tongue. For other pitches use the figures appropriate thereto in the same general manner.

The diagram indicates the figures for sixth pitch, quarter pitch, third pitch and half pitch. The first three of these are in very common use, although the latter is somewhat exceptional.

It will take but a moment's reflection upon the part

of a practical man, with this diagram before him, to perceive that no changes are necessary in the rule where the span is more or less than 24 feet. The cuts are the same for quarter pitch irrespective of the actual dimensions of the building. The square in all such cases is used on the basis of similar triangles. The broad rule is simply this: To construct with the square such a triangle as will proportionately and correctly represent the full size, the blade becomes the base, the tongue the altitude or rise, while the hypotenuse that results represents the rafter. The necessary cuts are shown by the tongue and blade respectively.

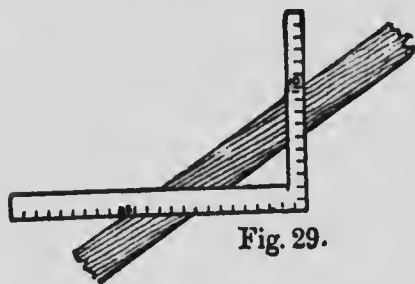



Fig. 29.

In order to give a general idea of the use of the square I herewith append a few illustrations

of its application in framing a roof of, say, one-third pitch, which will be supposed to consist of common rafters, hips, valleys, jack rafters and ridges. Let it be assumed that the building to be dealt with measures 30 feet from outside to outside of wall plates; the toe of the rafters to be fair with the outside of the wall plates, the pitch being one-third (that is the roof rises from the top of the wall plate to the top of the ridge, one-third of the width of the building, or 10 feet), the half width of the building being 15 feet. Thus, the figures for working on the square are obtained; if other figures are used, they must bear the same relative proportion to each other.

To get the required lengths of the stuff, measure across the corner of the square, from the 10-inch mark

on the tongue to the 15-inch mark on the blade, Fig. 29. This gives 18 feet as the length of the common rafter. To get the bottom bevel or cut to fit on the wall plate, lay the square flat on the side of the rafter. Start, say, at the right-hand end, with the blade of the square to the right, the point or angle of the square away from you, and the rafter, with its back (or what will be the top edge of it when it is fixed) towards you. Now place the 15-inch mark of the blade and the 10-inch mark of the tongue on the corner of the rafter—that is, towards you—still keeping the square laid flat, and mark along the side of the blade. This gives the bottom cut, and will fit the wall plate. Now move the square to the other

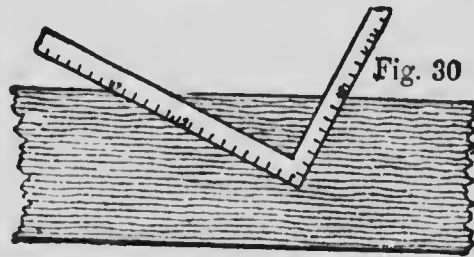

end of the rafter, place it in the same position as before to the 18-foot mark on the rafter and to the 10-inch mark on the tongue, and the 15-inch mark on the blade; then mark alongside the tongue. This gives the top cut to fit against the ridge. To get the length of the hip rafter, take 15 inches on the blade and 15 inches on the tongue of the square, and measure across the corner. This gives  $21\frac{3}{8}$  inches. Now take this figure on the blade and 10 inches on the tongue, then measuring across the corner gives the length of the hip rafter.

Another method is to take the 17-inch mark on the blade and the 8-inch mark on the tongue and begin as with the common rafter, as at Fig. 30. Mark along



# MICROCOPY RESOLUTION TEST CHART

(ANSI and ISO TEST CHART No. 2)



APPLIED IMAGE Inc

1653 East Main Street  
Rochester, New York 14609 USA  
(716) 482-0300 - Phone  
(716) 288-5989 - Fax

the side of the blade for the bottom cut. Move the square to the left as many times as there are feet in the half of the width of the building (in the present case, as we have seen, 15 feet is half the width), keeping the above mentioned figures 17 and 8 in line with

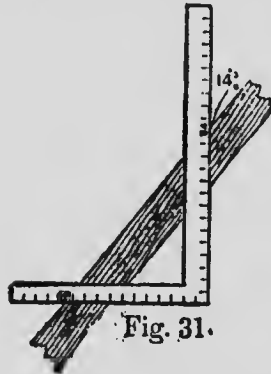


Fig. 31.

the top edge of the hip rafter; step it along just the same as when applying a pitch board on a stair-string, and after moving it along 15 steps, mark alongside the tongue. This gives the top cut or bevel and the length. The reason 17 and 8 are taken on the square is that 12 and 8 represent the rise and run of the common rafter to 1 foot on plan,

while 17 and 8 correspond with the plan of the hips.

To get the length of the jack rafters, proceed in the same manner as for common or hip rafters; or alternately space the jacks and divide the length of the common rafter into the same number of spaces. This gives the length of each jack rafter.

To get the bevel of the top edge of the jack rafter, Fig. 31, take the length,  $14\frac{3}{8}$  of the common rafter on the blade and the run of the common rafter on the tongue, apply the square to the jack rafter, and mark along the side of the blade; this gives the bevel or cut. The down bevel and the bevel at the bottom end are the same as for the common rafter.

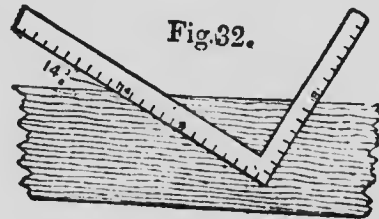


Fig. 32.

To get the bevel for the side of the purlin to fit

against the hip rafter, place the square flat against the side of the purlin, with 8 inches on the tongue and  $14\frac{3}{8}$  inches on the blade, Fig. 32. Mark alongside of the tongue. This gives the side cut or bevel. The  $14\frac{3}{8}$  inches is the length of the common rafter to the 1-foot run, and the 8 inches represent the rise.

For the edge bevel of purlin, lay the square flat against the edge of purlin with 12 inches on the tongue and  $14\frac{1}{2}$  inches on the blade, as at Fig. 33, and mark along the side of the tongue. This gives the bevel or cut for the edge of the purlin.

The rafter patterns must be cut half the thickness of ridge shorter; and half the thickness of the hip rafter allowed off the jack rafters.

These examples of what may be achieved by the aid of the square are only a few of the hundreds that can be solved by an intelligent use of that wonderful instrument, but it is impossible in a work of this kind to illustrate more than are here presented. The subject will be dealt with at length in a separate volume.


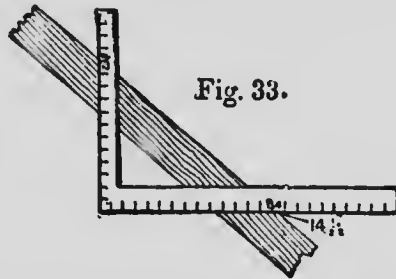


Fig. 33.

## CHAPTER II

### GENERAL FRAMING AND ROOFING

Heavy framing is now almost a dead science in this country unless it be in the far west or south, as steel and iron have displaced the heavy timber structures that thirty or forty years ago were so plentiful in roofs, bridges and trestle-work. As it will not be

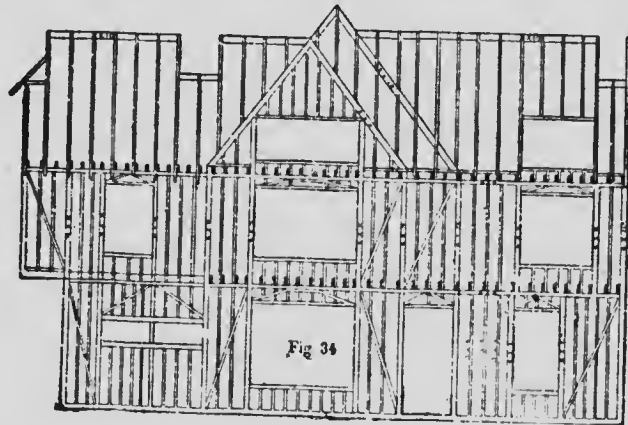

necessary to go deeply into heavy-timber framing, therefore I will confine myself more particularly to the framing of balloon buildings generally.

A balloon frame consists chiefly of a frame-work of scantling. The scantling may be 2 x 4 inches, or any other size that may be determined. The scantlings are spiked to the sills, or are nailed to the sides of the joist which rests on the sills, or, as is sometimes the case, a rough floor may be nailed on the joists



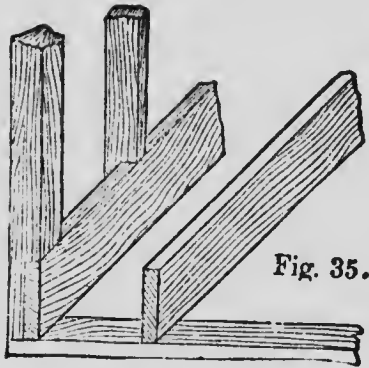


Fig. 35.

and on this, ribbon pieces of 2 x 4-inch stuff are spiked around to the outer edge of the foundation, and onto these ribbon pieces the scantling is placed and "toe-nailed" to them. The doors and windows are spaced off as shown in Fig. 34, which represents a ballon frame

and roof in skeleton condition. These frames are generally boarded on both sides, always on the outside. Sometimes the boarding on the outside is nailed on diagonally, but more frequently horizontally, which, in my opinion, is the better way, providing always the boarding is dry and the joints laid close.

The joists are laid on "rolling," that is, there are no gains or tenons employed, unless in trimmers or similar work. The joists are simply "toe-nailed" onto sill plates, or ribbon pieces, as shown in the illustration. Sometimes the joists are made to rest on the sills, as shown in

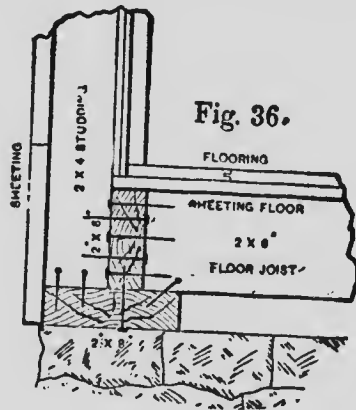


Fig. 36.






Fig. 37

Fig. 35, the sill being no more than a 2 x 4-inch scantling laid in mortar on the foundation, the outside joists forming a sill for the side studs. A better plan is

shown in Fig. 36, which gives a method known as a "box-sill." The manner of construction is very simple.

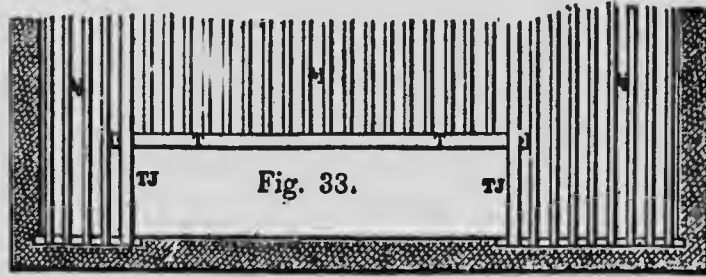

All joists in a building of this kind must be bridged similar to the manner shown in Fig. 37, about every eight feet of their length; in spans less than sixteen feet, and more than eight feet, a row of bridging should always be put in midway in the span. Bridging should not be less than 1 to 1½ inches in section.



In trimming around a chimney or a stair well-hole, several methods are employed. Sometimes the headers and trimmers are made from material twice as thick and the same depth as

the ordinary joists, and the intermediate joists are tenoned into the header, as shown in Fig. 38. Here we have T, T, for header, and T, J, T, J, for trimmers, and *b, j*, for the ordinary joists. In the western, and also some of the central States, the trimmers and headers are made up of two thicknesses, the header being mortised to secure the ends of the joists. The

two thicknesses are well nailed together. This method is exhibited at Fig. 39., which also shows one way to trim around a hearth; C shows the header with trimmer joists with tusk tenons, keyed solid in place.

Frequently it happens that a chimney rises in a building from its own foundation, disconnected from the walls, in which case the chimney shaft will require to be trimmed all around, as shown in




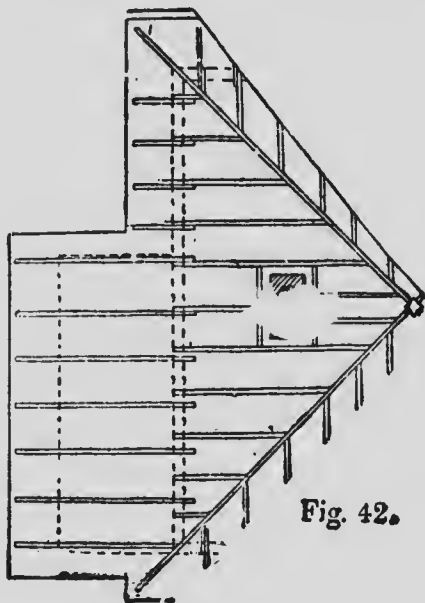


Fig. 40. In cases of this kind the trimmers A, A, should be made of stuff very much thicker than the joists, as they have to bear a double burden; B, B shows the heading, and C, C, C, C the tail joists. B, B, should have a thickness double that of C, C, etc., and A, A should at least be

three times as stout as C, C. This will to some extent equalize the strength of the whole floor, which is a matter to be considered in laying down floor timbers, for a floor is no stronger than its weakest part.

There are a number of devices for trimming around stairs, fire-places and chimney-stacks by which the cutting or mortising of the timbers is avoided. One method is to cut the timbers the exact length, square

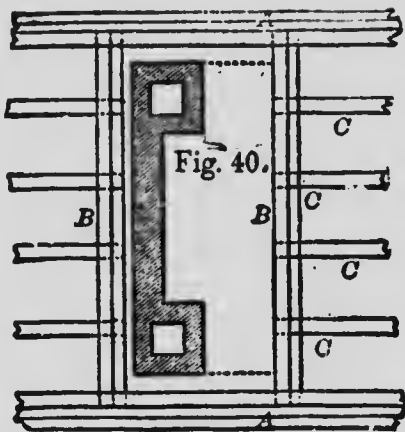
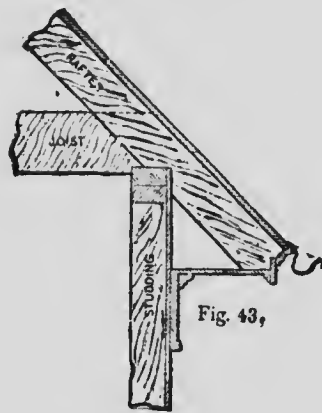


in the ends, and then insert iron dowels—two or more—in the ends of the joists, and then bore holes in the trimmers and headers to suit, and drive the whole solid together. The dowels are made from  $\frac{3}{4}$ -inch or 1-inch round iron. Another and a better device is the "bridle iron," which may be hooked over the trimmer or header, as the case may be, the stir-

rup carrying the abutting timber, as shown in Fig. 41. These "bridle irons" are made of wrought iron— $2 \times 2\frac{1}{2}$  inches, or larger dimensions if the work require such; for ordinary jobs, however, the size given will be found plenty heavy for carrying the tail joists, and a little heavier may be employed to carry the header. This style of connecting the trimmings does not hold the frame-work together, and in places where there is any tendency to thrust the work apart, some provision must be made to prevent the work from spreading.

In trimming for a chimney in a roof, the "headers," "stretchers" or "trimmers," and "tail rafters," may be simply nailed in place, as there is no great weight

beyond snow and wind pressure to carry, therefore the same precautions for strength are not necessary. The sketch shown at Fig. 42 explains how the chimney openings in the roof may be trimmed, the parts being only spiked together. A shows a hip rafter against which the cripples on both sides are spiked. The chimney-stack is shown in the center of the roof—isolated—trimmed on the four sides. The sketch is

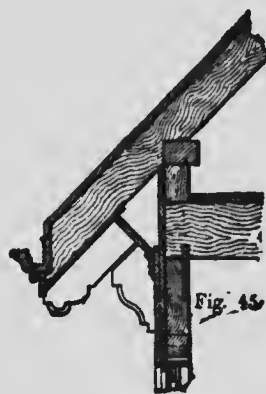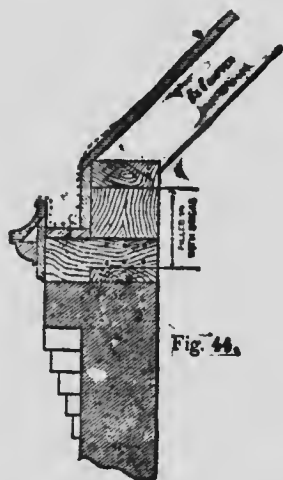


self-explanatory in a measure, and should be easily understood.

An example or two showing how the rafters may be connected with the plates at the eaves and finished for cornice and gutters, may not be out of place. A simple method is shown at Fig. 43, where the cornice is complete and consists of a few members only. The gutter is attached to the crown moulding, as shown.

Another method is shown at Fig. 44, this one being intended for a brick wall having sailing courses over cornice. The gutter is built in of wood, and is

lined throughout with galvanized iron. This makes a substantial job and may be used to good purpose on brick or stone warehouses, factories or similar buildings.


Another style of rafter finish is shown at Fig. 45, which also shows scheme of cornice. A similar finish is shown at Fig. 46, the cornice being a little different. In both these examples, the gutters are of wood, which should be lined with sheet metal of some sort in order to prevent their too rapid decay. At Fig. 47 a rafter finish is shown which is intended for a veranda or porch. Here the construction is very simple. The rafters are dressed and cut on projecting end to represent brackets and form a finish.

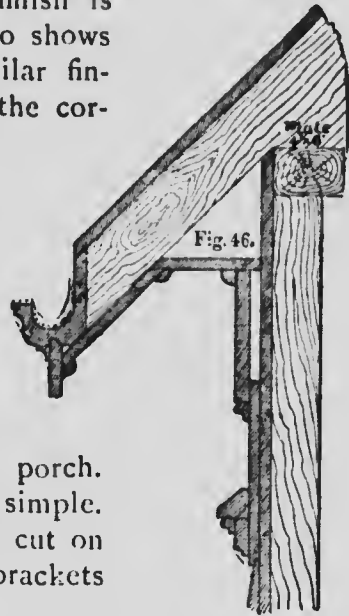

From these examples the workman will get sufficient ideas for working his rafters to suit almost any condition. Though there are many hundreds of styles which might be presented, the foregoing are ample for our purpose.

It will now be in order to take up the construction of roofs, and describe the methods by which such construction is obtained.

The method of obtaining the lengths and bevels of

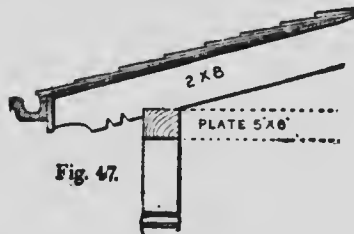

rafters for ordinary roofs, such as that shown in Fig 48, has already been given in the chapter on the steel square. Something has also been said regarding hip and valley roofs; but not enough, I think, to satisfy the full requirements of the workman, so I will endeavor to give a clearer idea of the construction of these roofs by employing the graphic system, instead of depending altogether on the steel square, though I

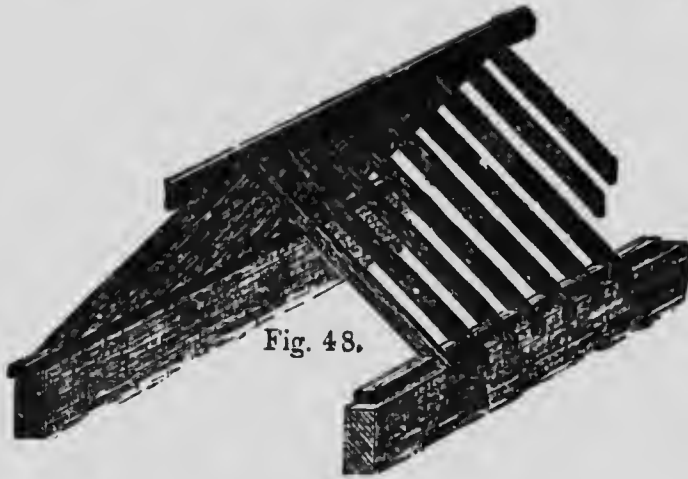


Fig. 48.

earnestly advise the workman to "stick to the square." It never makes a mistake, though the owner may in its application.

A "hip roof," pure and simple, has no gables, and is often called a "cottage roof," because of its being best adapted for cottages having only one, or one and a half, stories. The chief difficulty in its construction is getting the lengths and bevels of the hip or angle rafter and the jack or cripple rafter. To the expert workman, this is an easy matter, as he can readily obtain both lengths and bevels by aid of the square, or by lines such as I am about to produce.

The illustration shown at Fig. 49 shows the simplest form of a hip roof. Here the four hips or diagonal rafters meet in the center of the plan. Another style of hip roof, having a gable and a ridge in the center of the building, is shown at Fig. 50. This is quite a common style of roof, and under almost every condition it looks well and has a good effect. The plan

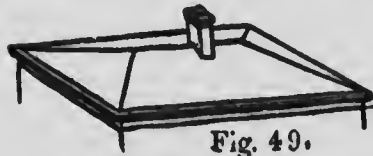


Fig. 49.

shows lines of hips, valleys and ridges.

The simplest form of roof is that known as the "lean-to" roof. This is formed by causing one side wall to be raised higher than the opposite side wall, so that when rafters or joists are laid from the high to the low wall a sloping roof is the result. This style of a roof is sometimes called a "shed roof" or a "pent roof." The shape is shown at Fig. 51, the upper sketch showing an end view and the lower one a plan of the roof. The method of framing this roof, or adjusting the timbers

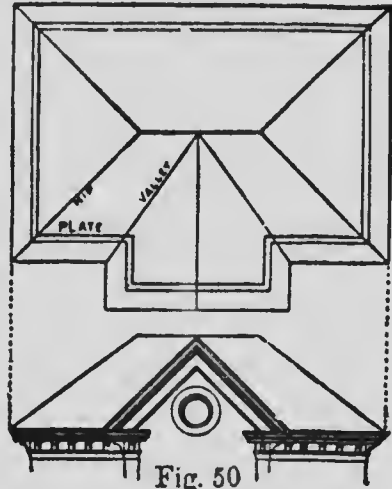


Fig. 50

it, is quite obvious and needs no explanation. This style of roof is in general use where an annex or shed is built up against a superior building, hence its name of "lean-to," as it usually "leans" against the main building, the wall of which is utilized for the



high part of the shed or annex, thus saving the cost of the most important wall of the structure.

Next to the "lean-to" or "shed roof" in simplicity comes the "saddle" or "double roof." This roof is shown at Fig. 52 by the end view on the top of the figure, and the plan at the bottom. It will be seen that this roof has a double slope, the planes forming the slopes are equally inclined to the horizon; the meeting of their highest sides makes an angle which is



Fig. 51.

called the ridge of the roof, and the triangular spaces at the end of the walls are called gables.

It is but a few years ago when the mansard roof was very popular, and many of them can be found in the older parts of the country, having been erected between the early fifties and the eighties, but, for many reasons, they are now less



Fig. 52.

used. Fig. 53 shows a roof of this kind. It is penetrated generally by dormers, as shown in the sketch, and the top is covered either by a "deck roof" or a very fine hip roof, as shown. Sometimes the sloping sides of these roofs are curved, which give them a graceful appearance, but adds materially to their cost.

Another style of roof is shown at Fig. 54. This is a gambrel roof, and was very much in evidence in pre-revolutionary times, particularly among our Knickerbocker ancestors. In conjunction with appropriate dormers, this style of roof figures prominently in what is known as early "colonial style." It has some

advantages over the mansard. Besides these there are many other kinds of roofs, but it is not my purpose to enter largely into the matter of styles of roofs, but simply to arm the workman with such rules and practical equipment that he

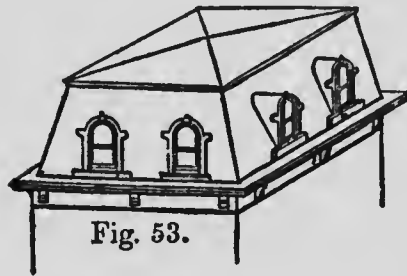


Fig. 53.

will be able to tackle with success almost any kind of a roof that he may be called upon to construct.

When dealing with the steel square I explained how the lengths and bevels for common rafters could be obtained by the use of the steel square alone; also hips, purlins, valleys and jack rafters might be obtained by the use of the square, but, in order to fully equip the workman, I deem it necessary to present for his benefit a graphic method of obtaining the lengths, cuts and backing of rafters and purlins required for a hip roof.

At Fig. 55, I show the plans of a simple hip roof having a ridge.

The hips on the plan form an angle of  $45^\circ$ , or a miter, as it were. The plan being rectangular leaves the ridge the length of the difference between the length and the width of the building. Make  $cd$  on the ridge-line as shown, half the width of  $ab$ , and the angle  $bda$  will be a right angle. Then if we extend  $bd$  to  $e$ , making  $de$  the rise of the roof,  $ae$  will be the length of the hip rafter, and the



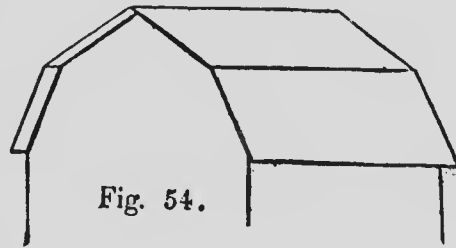


Fig. 54.

angle at  $x$  will be the plumb cut at point of hip and the angle at  $a$  will be the cut at the foot of the rafter. The angle at  $v$  shows the backing of the hip. This bevel is obtained as follows: Make  $ag$  and  $ah$  equal distances—any distance will serve—then draw a line  $hg$  across the angle of the building, then with a center on  $ad$  at  $p$ , touching the line  $ae$  at  $s$ , describe a circle as shown by the dotted line, then draw the lines  $kh$  and

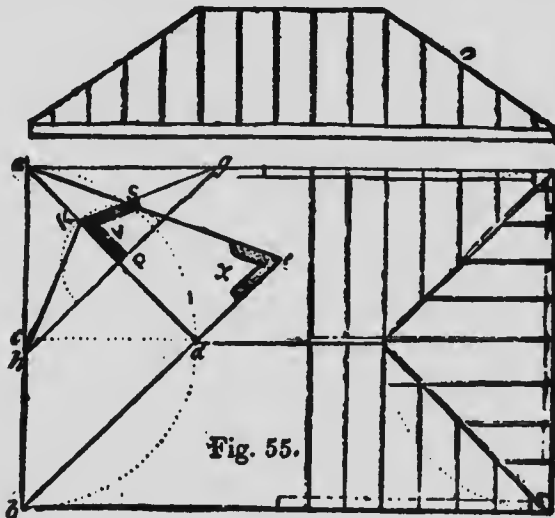


$kg$ , and that angle, as shown by the bevel  $v$ , will be the backing or bevel for the top of the hip, beveling each way from a center line of the hip. This rule for backing a hip holds good in all kinds of hips, also for guttering a valley rafter, if the bevel is reversed. A hip roof where all the hips abut each other in the center is shown in Fig. 56. This style of roof is generally called a "pyramidal roof" because it has the appearance of a low flattened pyramid. The same rules governing Fig. 55 apply to this example. The bevels C and B show the backing of the hip, B showing the

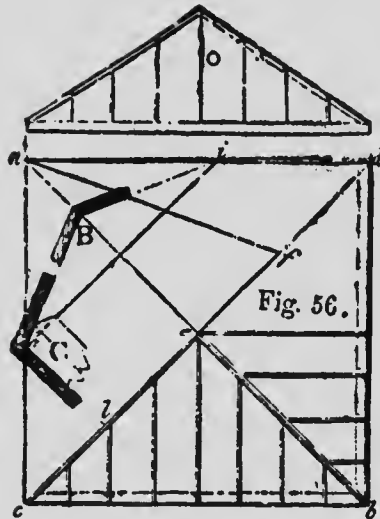


top from the center line *ae*; and C showing the bevel as placed against the side of the hip, which is always the better way to work the hip. A portion of the hip backed is shown at C. The rise of the roof is shown at O.

At Fig. 57 a plan of a roof is shown where the seats of the hips are not on an angle of  $45^\circ$  and where the ends and sides of the roof are of different

itches. Take the base line of the hip, *ae* or *eg*, and make *ef* perpendicular to *ae*, from *e*, and equal to the rise at *f*; make *fa* or *fg* for the length of the hip, by drawing the line *lm* at right angles to *ae*. This gives the length of the hip rafter. The backing of the hip is obtained in a like manner to former examples, only, in cases of this kind, there are two bevels for the backing, one side of the hip being more acute than the other, as shown at D and E. If the hips are to be mitered, as is sometimes the case in roofs of this kind, then

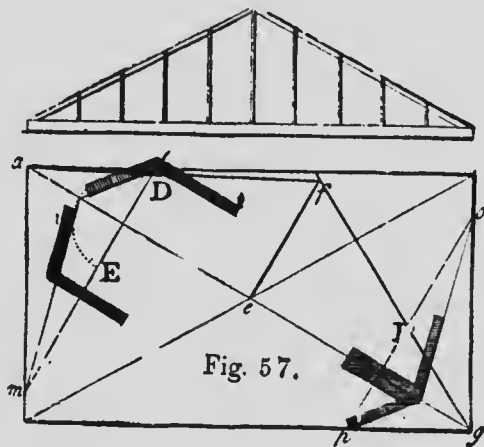

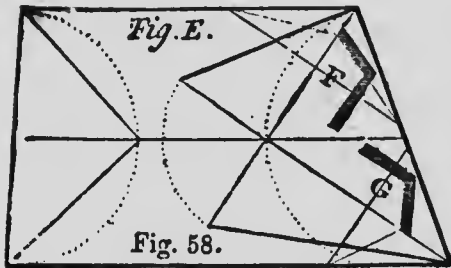


the back of the hip will assume the shape as shown by the two bevels at F. A hip roof having an irregular plan is shown at Fig. 58. This requires no explanation,

as the hips and bevels are obtained in the same manner as in previous examples. The backing of the hips is shown at FG.


An octagon roof is shown at Fig. 59, with all the lines necessary for getting the lengths, bevels, and backing for the hips.

The line *ax* shows the seat of the hip, *xe* the rise of roof, and *ae* the length of hip and plumb cut, and the bevel at E shows the backing of the hips.

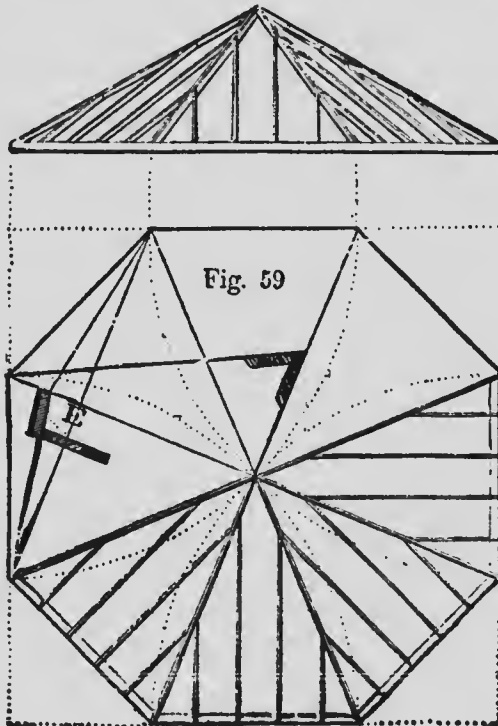

These examples will be quite sufficient to enable the workman to understand the general theory of laying out hip roofs. I

may also state that to save a repetition of drawing and explaining the rules that govern the construction of hip roofs, such as I have presented serve equally well for skylights or similar work. Indeed, the clever workman will find hundreds of instances in his work where the rules given will prove useful.

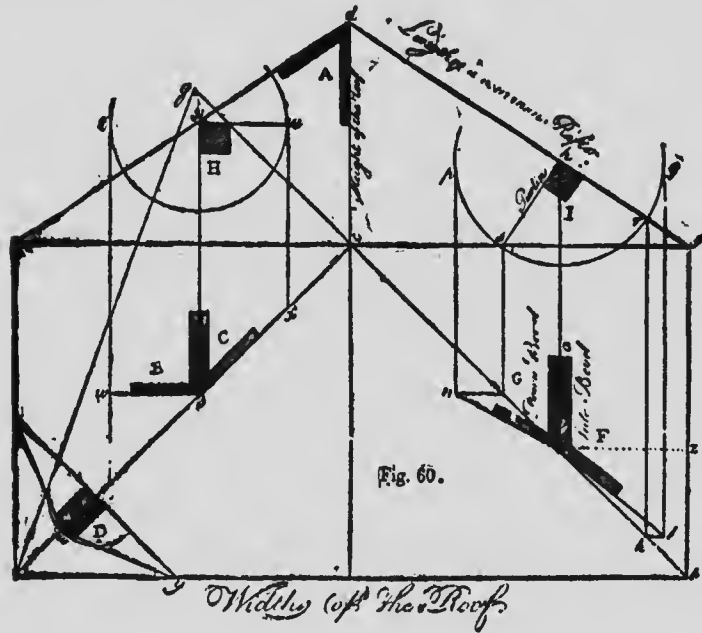

There are a number of methods for getting the lengths and bevels for purlins. I give one here which I think is equal to any other, and perhaps as simple. Suppose Fig. 60 shows one end of a hip roof, also the rise and length of common rafters. Let the purlin be in any place on the rafter, as I, and in its most common position, that is, standing square with the rafter; then with the point *b* as a center with any radius, describe a circle. Draw two lines, *ql* and *pn*, to touch

the circle  $p$  and  $q$  parallel to  $fb$  and at the points  $s$  and  $r$ , where the two sides of the purlin intersect, draw two parallel lines to the former, to cut the diagonal in  $m$  and  $k$ ; then  $G$  is the down bevel and  $F$  the side bevel of the purlin; these two bevels, when applied to the end of the purlin, and when cut by them, will exactly fit the side of the hip rafters.

To find the cuts of a purlin where two sides are parallel to horizon: The square at  $B$  and the bevel at  $C$  will show how to draw the end of the purlin in this easy case. The following is universal in all positions of the purlin: Let  $ab$  be the width of a square roof, make  $bf$  or  $ae$  one-half of the width, and make  $cd$  perpendicular in the middle of  $ef$ , the height of the roof or rise, which in this case is one-third; then draw  $de$  and  $df$ , which are each the length of the common rafter.

To find the bevel of a jack rafter against the hip, proceed as follows: Turn the stock of the side bevel at  $F$  from  $a$  around to the line  $iz$ , which will give the side bevel of the jack rafter. The bevel at  $A$ , which is the top of the common rafter, is the down bevel of the jack rafter.


At  $D$  the method of getting the backing of a hip rafter is shown the same as explained in other figures.

There are other methods of obtaining bevels for purlins, but the one offered here will suffice for all practical purposes.

I gave a method of finding the back cut for jack rafters by the steel square, in a previous chapter. I give another rule herewith for the steel square: Take the length of the common rafter on the blade and the run of the same rafter on the tongue, and the blade of the square will give the bevel for the cut on the back

of the jack rafter. For example, suppose the rise to be 6 feet and the run 8 feet, the length of the common rafter will be 10 feet. Then take 10 feet on the blade of the square, and 8 feet on the tongue, and the blade will give the back bevel for the cut of the jack rafters.

To obtain the length of jack rafters is a very simple process, and may be obtained easily by a diagram, as shown in Fig. 61, which is a very common method:

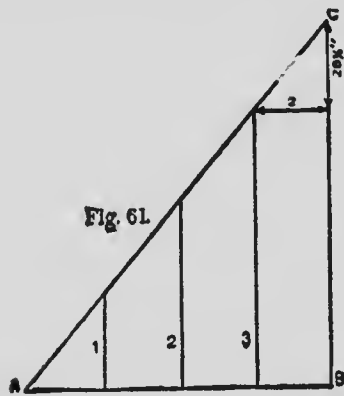

First lay off half the width of the building to scale, as from A to B, the length of the common rafter B to C, and the length of the hip rafter from A to C. Space off the widths from jack rafter to jack rafter as shown by the lines 1, 2, 3, and measure them accurately. Then the lines 1, 2, and 3 will be the exact lengths of the jack rafters in those divisions. Any number of jack rafters may be laid off this way, and the result will be the length of each rafter, no matter what may be the pitch of the roof or the distance the rafters are apart.

A table for determining the length of jack rafters is given below, which shows the lengths required for different spacing in three pitches:

One-quarter pitch roof:

They cut 13.5 inches shorter each time when spaced 12 inches.

They cut 18 inches shorter each time when spaced 16 inches.



They cut 27 inches shorter each time when spaced 24 inches.

One-third pitch roof:

They cut 14.4 inches shorter each time when spaced 12 inches.

They cut 19.2 inches shorter each time when spaced 16 inches.

They cut 28.8 inches shorter each time when spaced 24 inches.

One-half pitch roof:

They cut 17 inches shorter each time when spaced 12 inches.

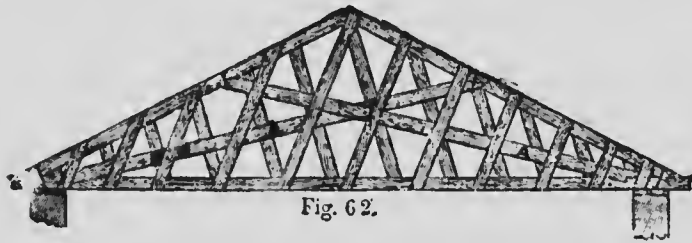



Fig. 62.

They cut 22.6 inches shorter each time when spaced 16 inches.

They cut 34 inches shorter each time when spaced 24 inches.

It is not my intention to enter deeply into a discussion of the proper methods of constructing roofs of all shapes, though a few hints and diagrams of octagonal, domical and other roofs and spires will doubtless be of service to the general workman. One of the most useful methods of trussing a roof is that known as a lattice "built-up" truss roof, similar to that shown at Fig. 62. The rafters, tie beams and the two main braces A, A, must be of one thickness—say, 2 x 4 or 2 x 6 inches, according to the length of the span—while the minor braces are made of 1-inch stuff and

about 10 or 12 inches wide. These minor braces are well nailed to the tie beams, main braces and rafters. The main braces must be halved over each other at their juncture, and bolted. Sometimes the main braces are left only half the thickness of the rafters, then no halving will be necessary, but this method has the disadvantage of having the minor braces nailed to one side only. To obviate this, blocks may be nailed to the inside of the main braces to make up the thickness

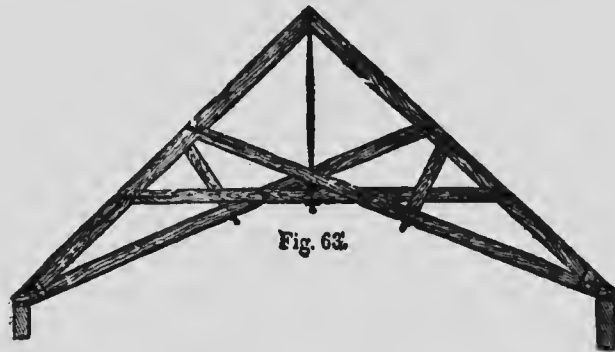

required, as shown, and the minor braces can be nailed or bolted to the main brace.

The rafters and tie beams are held together at the foot of the rafter by an iron bolt, the rafter having a crow-foot joint at the bottom, which is let into the tie beam. The main braces also are framed into the rafter with a square toe-joint and held in place with an iron bolt, and the foot of the brace is crow-footed into the tie beam over the wall.

This truss is easily made, may be put together on the ground, and, as it is light, may be hoisted in place with blocks and tackle, with but little trouble. This truss can be made sufficiently strong to span a roof from 40 to 75 feet. Where the span inclines to the

greater length, the tie beams and rafters may be made of built-up timbers, but in such a case the tie beams should not be less than 6 x 10 inches, nor the rafters less than 6 x 6 inches.

Another style of roof altogether is shown at Fig. 63. This is a self-supporting roof, but is somewhat expensive if intended for a building having a span of 30 feet or less. It is fairly well adapted for halls or for country churches, where a high ceiling is required and the span anywhere from 30 to 50 feet over all. It would not be safe to risk a roof of this kind on a building having a span more than 50 feet. The main features of this roof are: (1) having

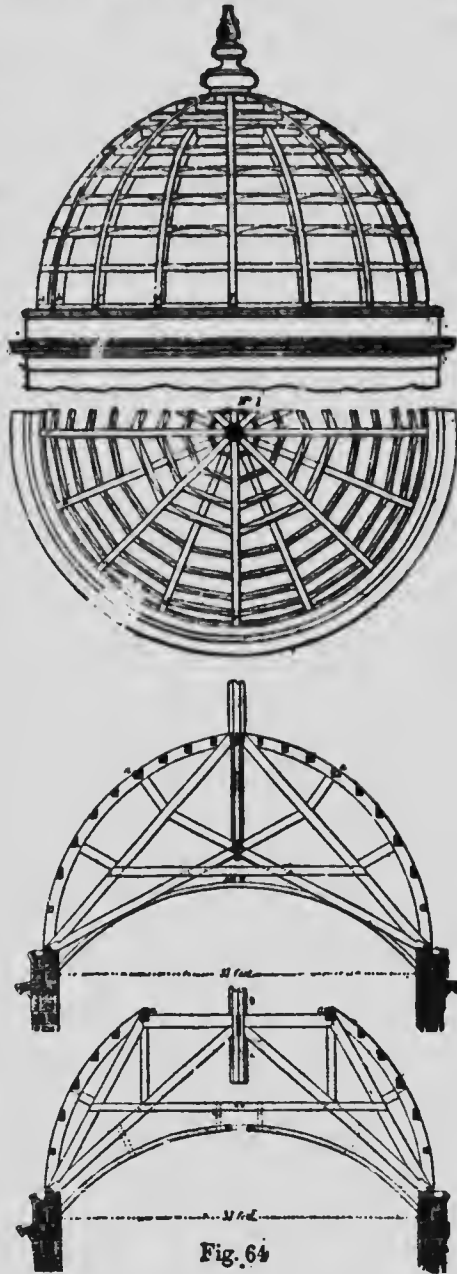


Fig. 63

collar beams, (2) truss bolts, and (3) iron straps at the joints and triple bolts at the feet.

I show a dome and the manner of its construction at Fig. 64. This is a fine example of French timber framing. The main carlins are shown at *a, b, c, d* and *e*, Nos. 1 and 2, and the horizontal ribs are also shown in the same numbers, with the curve of the outer edge described on them. These ribs are cut in between the carlins or rafters and beveled off to suit. This dome may be boarded over either horizontally or

with boards made into "gores" and laid on in line with the rafters or carlins.

The manner of framing is well illustrated in Nos. 3 and 4 in two ways, No. 3 being intended to form the two principal trusses which stretch over the whole diameter, while No. 4 may be built in between the main trusses.

The illustrations are simple and clear, and quite sufficient without further explanation.


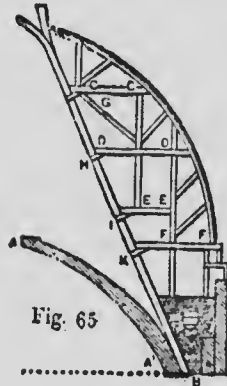


Fig. 65 exhibits a portion of the dome of St. Paul's Cathedral, London, which was designed by Sir Christopher Wren. The system of the framing of the external dome of this roof is given. The internal cupola, AAI, is of brick-work, two bricks in thickness, with a course of bricks 18 inches in length at every five feet of rise. These serve as a firm bond. This dome was turned upon a wooden center, whose only support was the projections at the springing of the dome, which is said to have been unique. Outside the brick cupola, which is only alluded to in order that the



at the top. A lantern of Portland stone crowns the summit of the dome. The method of framing will be clearly seen in the diagram. It is in every respect an excellent specimen of roof construction, and is worthy of the genius and mathematical skill of a great workman.

With the rules offered herewith for the construction of an octagonal spire, I close the subject of roofs: To obtain bevels and lengths of braces for an octagonal spire, or for a spire of any number of sides, let AB, Fig. 66, be one of the sides. Let AC and BC be the seat line of hip. Let AN be the seat of brace. Now, to find the position of the tie beam on the hips so as to be square with the boarding, draw a line through C, square with AB, indefinitely. From C, and square with EC, draw CM, making it equal to the height. Join EM. Let OF be the height of the tie beam. At F draw square with EM a line, which produce until it cuts EC prolonged at G. Draw CL square with BC. Make CL in

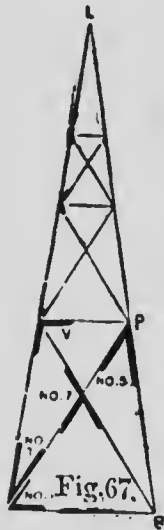


length equal to EM. Join BL, and make NH equal to OF. From G draw the line GS parallel with AB, cutting BC prolonged, at the point S; then the angle at H is the bevel on the hip for the tie beam. For a bevel to miter the tie beam, make FV equal ON. Join VX; then the bevel at V is the bevel on the face. For the down bevel see V, in Fig. 67. To find the length of brace, make AB, Fig. 67, equal to AB, Fig. 66. Make AL and BL equal to BL, Fig. 66. Make BP equal to BH. Join AP and BC, which will be the length of the brace. The bevels numbered 1, 3, 5 and 7 are all to be

used, as shown on the edge of the brace. No. 1 is to be used at the top above No. 5. For the bevel on the face to miter on the hip, draw AG, Fig. 66, cutting BS at J. Join JH. Next, in Fig. 68, make A' equal AP, Fig. 67, and make AJ equal to AJ, Fig. 66. Make PJ equal to JH, Fig. 66, and make PI equal to HI. Join AI; then the bevel marked No. 5 will be correct for the beam next to the hip, and the bevel marked No. 6 will be correct for the top. Bevel No. 2 in this figure will be correct for the beam next to the plate. The edge of the brace is to correspond with the boarding.

A few examples of scarfing timber are presented at Figs. 69, 70, 71 and 72. The example shown at Fig. 69 exhibits a method by which the two ends of the timber are joined together with a step-splice and spur or tenon on end, it being drawn tight together by the keys, as shown in the shaded part.

Fig. 70 is a similar joint though simpler, and therefore a better one; A, A are generally joggles of hardwood, and not wedged keys, but the latter are preferable, as they allow of tightening up. The shearing used along BF should be pine, and be not less than six and a half times BC; and BC should be equal to at least twice the depth of the key. The shear in the keys being at right angles to the grain of the wood, a greater stress per square inch of shearing area can be put upon them than along BF, but their shearing area should be equal in strength to the other parts of the joint; oak is the best wood for them, as its shearing is from four to five times that of pine.



Scarfed joints with bolts and indents, such as that shown at Fig. 71, are about the strongest of the kind. From this it will be seen that the strongest and most economical method in every way, in lengthening ties, is by adoption of the common scarf joint, as shown at Fig. 71, and finishing the scarf as there represented.

The carpenter meets with many conditions when timbers of various kinds have to be lengthened out







Fig. 72.

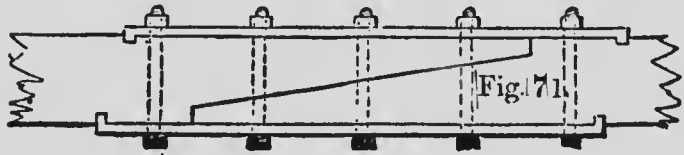

and spliced, as in the case of wail plates, etc., where there is not much tensile stress. In such cases the timbers may simply be halved together and secured with nails, spikes, bolts, screws or pins, or they may




be halved or beveled as shown in Fig. 72, which, when boarded above, as in the case of wall plates built in the wall, or as stringers on which partitions are set, or joint beams on which the lower edges of the joists rest, will hold good together.

Treadgold gives the following rules, based upon the relative resistance to tension, crushing and shearing of different woods, for the proportion which the length or overlap of a scarf should bear to the depth of the tie:

	Without bolts	With bolts	With bolts and indents
Oak, ash, elm, etc. . . .	6	3	2
Pine and similar woods .	12	6	4

There are many other kinds of scarfs that will occur to the workman, but it is thought the foregoing may be found useful on special occasions.


A few examples of odd joints in timber work will not be out of place. It sometimes happens that cross-beams are required to be fitted in between girders in position, as in



renewing a defective one, and when this has to be done, a mortise and tenon joint is used, a chase has to be cut leading into the mortise, as shown in the horizontal section, Fig. 73. By inserting the tenon at the other end of the beams into a mortise cut so as to allow of fitting it in at an angle, the tenon can be slid along the chase *b* into its proper position. It is better in this case to dispense with the long tenon, and, if necessary, to substitute a bolt, as shown in the sketch. A mortise of this kind is called a *chase mortise*, but an


iron shoe made fast to the girder forms a better means of carrying the end of a cross-beam. The beams can be secured to the shoe with bolts or other fastenings.

To support the end of a horizontal beam or girt on the side of a post, the joint shown in Fig. 74 may be



used where the mortise for the long tenon is placed, to weaken the post as little as possible, and the tenon made about one-third the thickness of the beam on which it is cut. The amount of bearing the beam has on the post must greatly depend on the work it has to do. A hardwood pin can be passed through the


cheeks of the mortise and the tenon as shown to keep the latter in position, the holes being *draw-bored* in order to bring the shoulders of the tenon tight home against the post, but care must be taken not to overdo the draw-boring or the wood at the end of the tenon will be forced out by the pin. The usual rule for draw-boring is to allow a quarter of an inch *draw* in soft woods and one-eighth of an inch for hard woods.

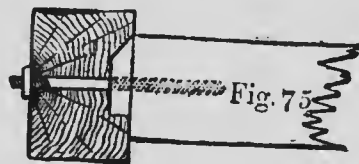

These allowances may seem rather large, but it must be remembered that both holes in tenon and mortise will give a little, so also will the draw pin itself unless it is of iron, an uncommon circumstance.

Instead of a mortise and tenon, an iron strap or a screw bolt or nut may be used, similar to that shown in Fig. 75.


The end of the beam may also be supported on a block which should be of hardwood, spiked or bolted

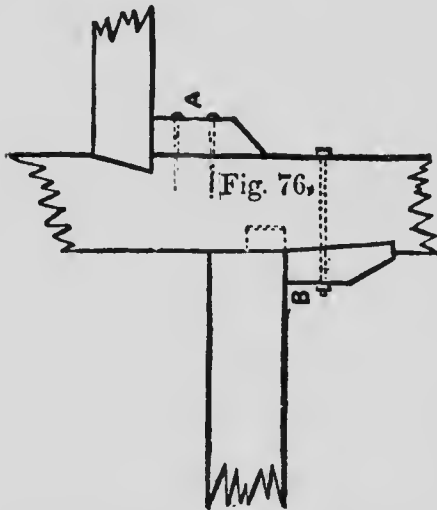

on to the side of the post, as at A and B, Fig. 76. The end of the beam may either be tenoned into the post as shown, or it may have a shoulder, with the end of the beam beveled, as shown at A.

Heavy roof timbers are rapidly giving place to steel, but there yet remain many cases where timbers will remain employed and the old method of framing continued. The use of iron straps and bolts in fastening timbers together or for trussing purposes will never perhaps become obsolete, therefore a knowledge of the proper use of these will always remain valuable.

Heel straps are used to secure the joints between inclined struts and horizontal beams, such as the joints between rafters and beams.

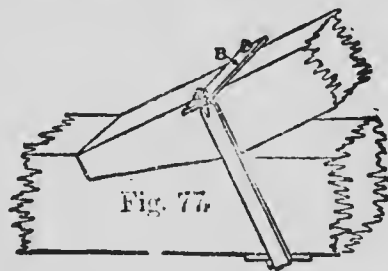

They may be placed either so as merely to hold the beams close together at the joints, as in Fig. 77, or so as to directly resist the thrust of the inclined strut and prevent it from shearing off the portion of the horizontal beam against which it presses. Straps

of the former kind are sometimes called *kicking-straps*. The example shown at Fig. 77 is a good form of strap for holding a principal rafter down at the foot of the tie beam. The screws and nuts are prevented from sinking into the wood by the bearing plate B, which acts as a washer on which the nuts ride when tightening is done. A check plate is also provided under-

neath to prevent the strap cutting into the tie beam.

At Fig. 78 I show a form of joint often used, but it represents a difficulty in getting the two parallel abutments to take their fair share of the work, both from want of accuracy in workmanship as well as from the disturbing influence of shrinkage. In

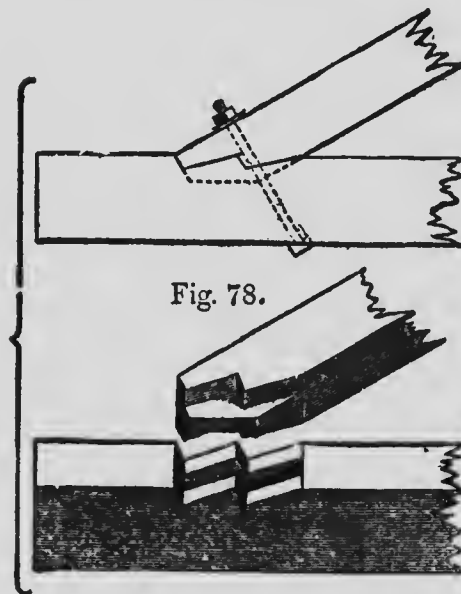


Fig. 78.

making a joint of this sort, care must be taken that sufficient wood is left between the abutments and the end of the tie beam to prevent shearing. A little judgment in using straps will often save both time and money and yet be sufficient for all purposes.

I show a few examples of strengthening and trussing joints, girders, and timbers at Fig 79. The diagrams need no explanation, as they are self-evident.

It would expand this book far beyond the dimensions

awarded me, to even touch on all matters pertaining to carpentry, including bridges, trestles, trussed girders and trusses generally, so I must content myself

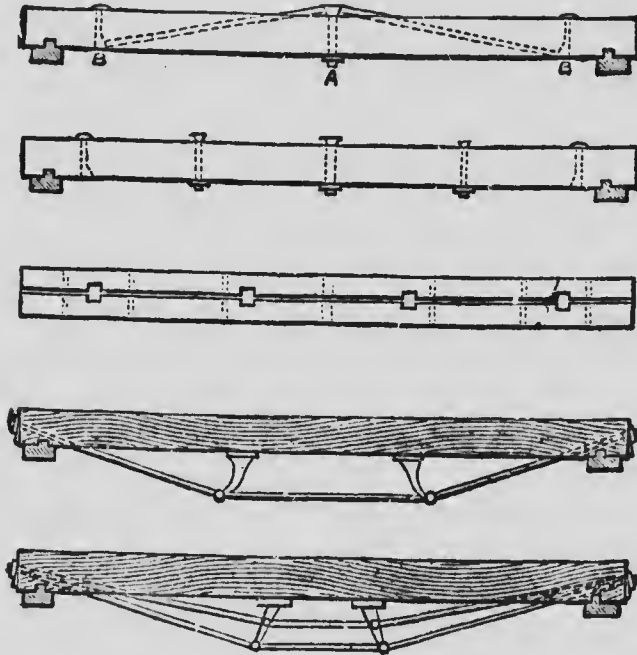


Fig. 79,

with what has already been given on the subject of carpentry. Though, as the reader is aware, the subject is only surmised.



Vertical text along the left edge, likely bleed-through from the reverse side of the page. The text is extremely faint and difficult to read, but appears to be organized in a list or table format with multiple columns.


## PART III

### JOINER'S WORK

#### CHAPTER I

##### KERFING, RAKING MOULDINGS, HOPPERS AND SPLAYS

This department could be extended indefinitely, as the problems in joinery are much more numerous than in carpentry, but as the limits of this book will not permit me to cover the whole range of the art, even if

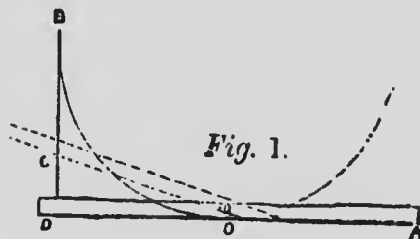

I were competent, I must be contented with dealing with these problems the workman will most likely be confronted with in his daily occupation.


First of all, I give several methods of "kerfing," for few things puzzle the novice more than this little problem. Let us suppose any circle around which it is desired to bend a piece of stuff to be 2 inches larger on the outside than on the inside, or in other words, the veneer is to be 1 inch thick, then take out as many saw kerfs as will measure 2 inches. Thus, if a saw cuts a kerf one thirty-second of an inch in width, then it will take 64 kerfs in the half circle to allow for the

vener to bend around neatly. The piece being placed in position and bent, the kerfs will exactly close.

Another way is to saw one kerf near the center of the piece to be bent, then place it on the plan of the frame, as indicated in the sketch and bend it until the kerf closes. The distance, DC, Fig. 1, on the line DB, will be the space between the kerfs necessary to complete the bending.

In kerfing the workman should be careful to use the same saw throughout, and to cut exactly the same depth every time, and the spaces must be of equal distance. In diagram Fig. 1, DA shows the piece to be bent, and at O the thickness of the stuff is shown, also path of the inside and outside of the circle.

Another, and a safe method of kerfing is shown at Fig. 2, in which it is desired to bend a piece as shown, and which is intended to be secured at the ends. Up to A is the piece to be treated.

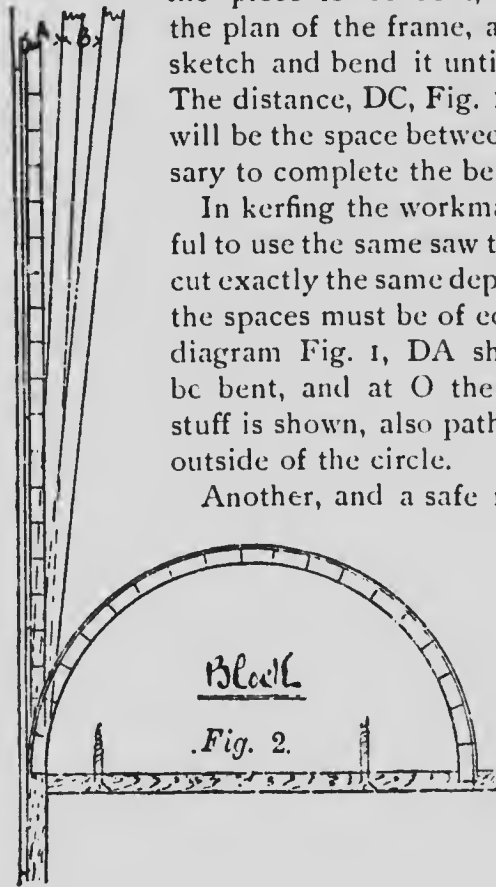


First gauge a line on about one-eighth inch back from the face edges, and try how far it will yield when the first cut is made up to the gauge line, being cut perfectly straight through from side to side, then place the work



on a flat board and try it gently until the kerf closes, and it goes as far as is shown at A, which is the first cut, B representing the second. Those are the distances the kerfs require to be placed apart to complete the curve. Try the work as it progresses. This eases the back of it and makes it much easier done when the whole cuts are finished. Now make certain that the job will fold to the curve, then fill them all with hot glue and proceed to fix. The plan shown here is a half semi, and may be in excess of what is wanted, but the principle holds good.


Another method is shown at Fig. 3 for determining the number and

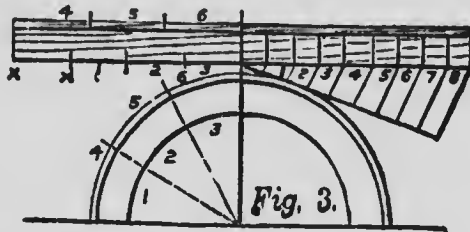

distances apart of the saw kerfs required to bend a board round a corner. The board is first drawn in position and a half of it divided into any number of equal parts by radii, as 1, 2, 3, 4, 5, 6. A straight piece is then marked off to correspond with the divisions on the circular one. By this it is seen that the part XX must be cut away by saw kerfs in order to let the board turn round. It therefore depends upon the thickness of the saw for the number of kerfs, and when that is known the distances apart can be determined as shown on the right in the figure. Here eight kerfs are assumed to be requisite.

To make a kerf for bending round an ellipse, such as that shown at Fig. 4, proceed as shown, CC and OO being the distances for the kerfs; 2 to 2 and 2 to 3 are the lengths of the points EF, while BB is the length of the

points *EE*, making the whole head piece in one. In case it is necessary to joint *D*, leave the ends about inches longer than is necessary, as shown by *N* in the

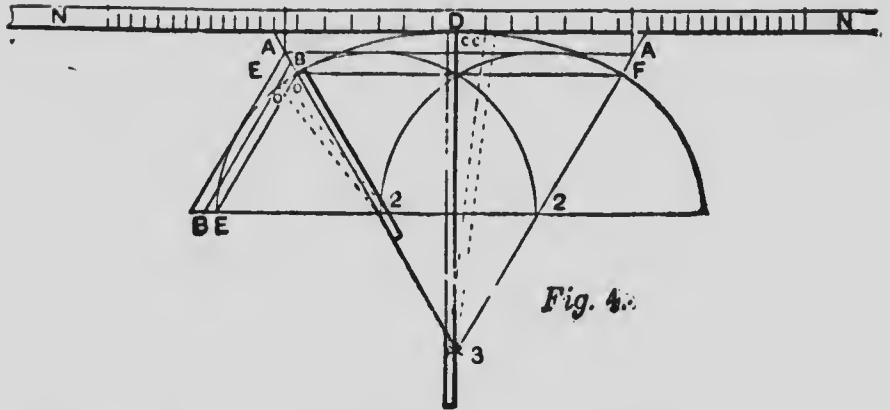


*Fig. 4.*

sketch, so that should a breakage occur this extra length may be utilized.

It is sometimes necessary to bend thick stuff around work that is on a rake, and when this is required, all that is necessary is to run in the kerfs the angle of the rake whatever that may be, as shown at Fig. 5. This rule holds good for all pitches or rakes. Fig. 6 shows a very common way of obtaining the distance to place the kerfs. The piece to be kerfed is shown at *C*; now make one at *E*; hold firm the lower part of *C* and bend




*Fig. 5.*

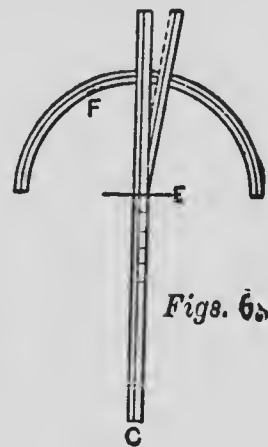


*Figs. 6a*

the upper end on the circle F until the kerf is closed. The line started at E and cutting the circumference of the circle indicates at the circumference the distance the saw kerfs will be apart. Set the dividers to this space, and beginning at the center cut, space the piece to be kerfed both ways. Use the same saw in all cuts and let it be clean and keen, with all dust well cleaned out.

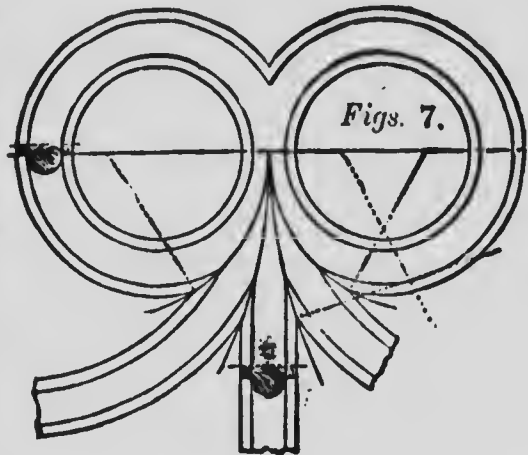


To miter mouldings, where straight lines must merge into lines having a curvature as in Figs. 7 and 8: In all cases, where a straight moulding is intersected with a curved moulding of the same profile at whatever angle, the miter is necessarily other than a straight line. The miter line

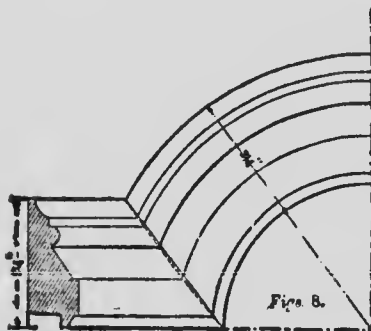

is found by the intersection of lines from the several points of the profile as they occur respectively in the straight and the curved mouldings. In order to find the miter between two such mouldings, first project lines from all of the points of


the profile indefinitely to the right, as shown in the elevation of the sketch. Now, upon the center line of the curved portion, or upon any line radiating from the center around which the curved moulding is to be

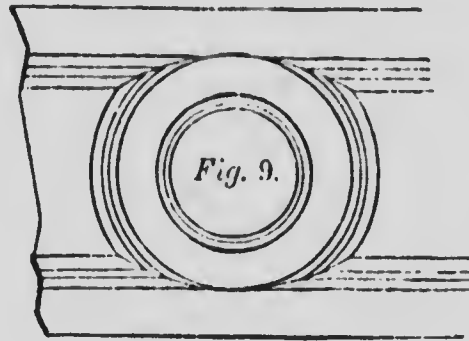

carried, set off the several points of the profile, spacing them exactly the same as they are in the elevation of the straight moulding. Place one leg of the dividers at the center of the circle,


bringing the other leg to each of the several points upon the curved moulding, and carry lines around the curve, intersecting each with a horizontal line from the corresponding point of the level moulding. The dotted line drawn through the intersections at the miter shows what must be the real miter line.

Another odd mitering of this class is shown in Fig. 9. In this it will be seen that the plain faces of the stiles and circular rail form junctions, the mouldings all being mitered. The miters are curved in order

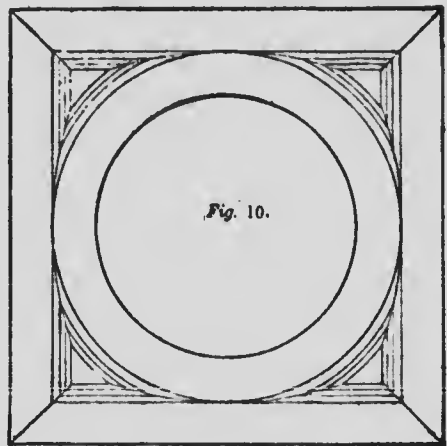



all lines have thus been measured, run an off-hand curve through the checks, and the curve will represent the corresponding hip at the center of its back.

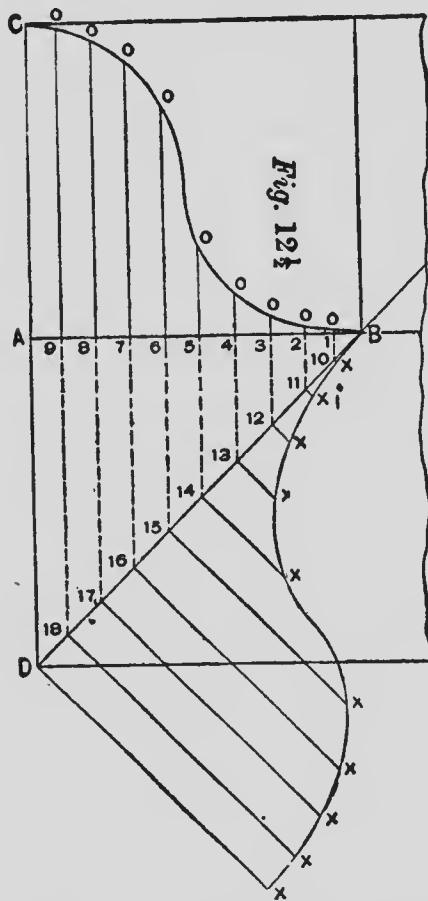


To find the bevel or backing of the hip to coincide with the plane of the common rafter, measure back on the parallel lines to the right of the curve one-half the thickness of the hip and draw another curve, which will be the lines on the side to trim to from the center of the back. A like amount must be added to the plumb cut to fit the corner of deck. Proceed in like manner for the octagon hip, but instead of adding  $\frac{5}{16}$ , add  $\frac{1}{16}$  of an inch as before described.

[While this is worked out on a given rise and run for the

rafter, the rule is applicable to any rise or run, as the workman will readily understand.]

A more elaborate system for obtaining the curve of a hip rafter, where the common rafters have an ogee or concave and convex shape, is shown at Fig. 12 $\frac{1}{2}$ . This

is a very old method, and is shown—with slight variations—in nearly all the old works on carpentry and joinery. Draw the seat of the common rafter, AB, and rise, AC. Then draw the curve of the common rafter, CD. Now divide the base line, AB, into any number of equal spaces, as 1, 2, 3, 4, 5, etc., and draw perpendicular lines to construct the curve CB, as 10, 20, 30, 40, etc. Now draw the seat of the valley, or hip rafter, as BD, and continue the perpendicular lines referred to until they meet BD, thus establishing the points 10, 11, 12, 13, 14, etc. From these points draw lines at right angles to BD, making 10 x equal in length to 10, and 11 x equal to 20;

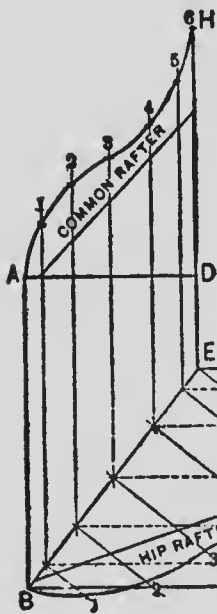

*Figs. 13.*

also 12 x equal to 30, and so on. When this has been done draw through the points indicated by x the curve, which is the profile of the valley rafters.

Another method, based on the same principles as Fig. 12½, is shown at Fig. 13. Let ABCFED represent the plan of the roof. FCG represents the profile of the wide side of common rafter. First divide this common rafter, GC, into any number of parts—in this case 6.

Transfer these points to the miter line EB, or, what is the same, the line in the plan representing the hip rafter. From the points thus established at E, erect perpendiculars indefinitely. With the dividers take the distance from the points in the line FE, measuring to the points in the profile GC, and set the same off on corresponding lines, measuring from EB, thus establishing the points 1, 2, etc.; then a line traced

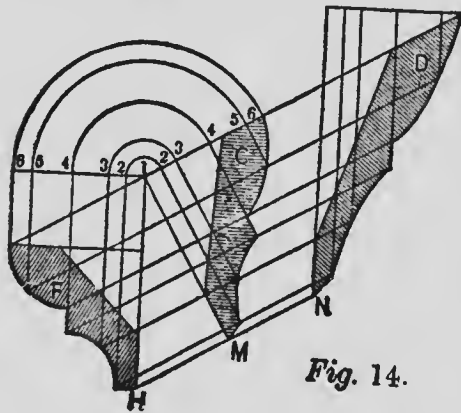


Fig. 14.

through these points will be the required hip rafter.

For the common rafter, on the narrow side, continue the lines from EB parallel with the lines of the plan DE and AB. Draw AD at right angles to these lines. With the

dividers, as before, measuring from FE to the points in GC, set off corresponding distances from AD, thus establishing the points shown between A and H. A line traced through the points thus obtained will be the line of the rafter on the narrow side.

These examples are quite sufficient to enable the workman to draw the exact form of any rafter no matter what the curve of its face may be, or whether it is for a veranda hip, or an angle bracket, for a cornice or niche.

Another class of angular curves the workman will meet with occasionally, is that when raking mouldings are used to work in level mouldings, as for



instance, a moulding down a gable that is to miter. The figures shaded in Fig. 14 represent the moulding in its various phases and angles. Draw the outline of the common level moulding, as shown at F, in the same position as if in its place on the building. Draw lines through as many prominent points in the profile as may be convenient, parallel with the line of rake. From the same points in the moulding draw vertical lines, as shown by IH, 2, 3, 4 and 5, etc. From the point I, square with the lines of the rake, draw IM,

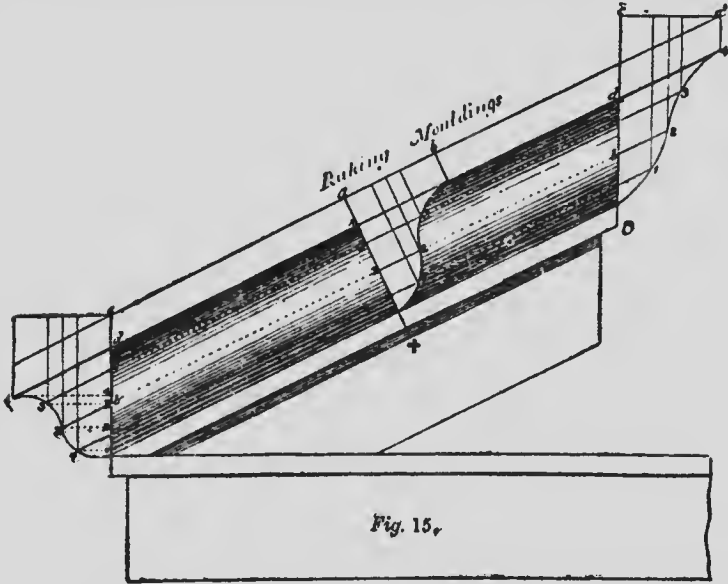



Fig. 15.

as shown, and from I as center, with the dividers transfer the divisions 2, 3, 4, etc., as shown, and from the points thus obtained, on the upper line of the rake draw lines parallel to IM. Where these lines intersect with the lines of the rake will be points through which the outline C may be traced.

In case there is a moulded head to put upon a raking

gable, the moulding D shown at the right hand must be worked out for the upper side. The manner in which this is done is self-evident upon examination of the drawing, and therefore needs no special description.

A good example of a raking moulding and its applications to actual work is shown in Fig. 15, on a different scale. The ogee moulding at the lower end is the regular moulding, while the middle line, *ax*, shows the shape of the raking moulding, and the curve on

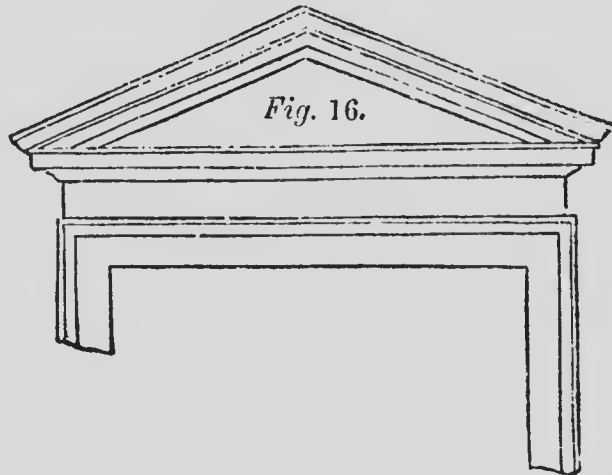

the top end, *cd*, shows the face of a moulding that would be required to return horizontally at that point. The manner of pricking off these curves is shown by the letters and figures.

At Fig. 16 a finished piece of work is shown, where this manner of work will be required, on the returns.

Fig. 17 shows the same moulding applied to a curved window or door head. The manner of pricking the curve is given in Fig. 18.

At No. 2 draw any line, AD, to the center of the

pediment, meeting the upper edge of the upper fillet in D, and intersecting the lines AAA, aa, bbb, ccc,

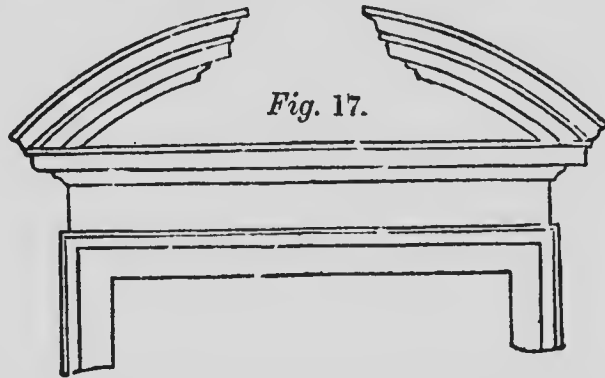


Fig. 17.

BBB in A, a, b, c, B, E. From these points draw lines aa, bb, cc, BB, EE, tangents to their respective arcs;



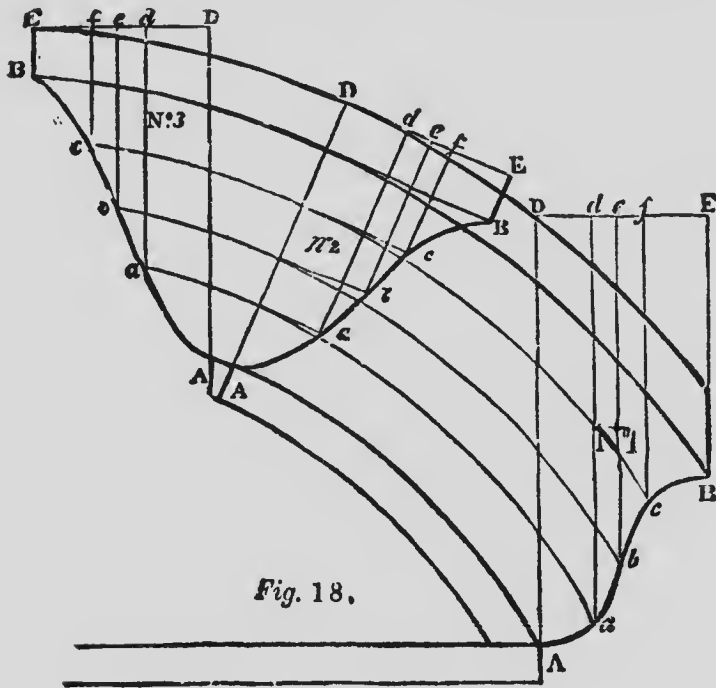


Fig. 18.

on the tangent line DE, from D, make  $Dd$ ,  $De$ ,  $Df$ , DE, respectively equal to the distances  $Dd$ ,  $De$ ,  $Df$ , DE on the level line DE, at No. 1. Through the points  $d$ ,  $e$ ,  $f$ , E, draw  $da$ ,  $eb$ ,  $fc$ , EB, then the curve drawn through the points A,  $a$ ,  $b$ ,  $c$ , B, will be the section of the circular moulding.

Sometimes mouldings for this kind of work are made

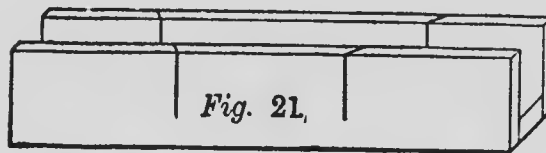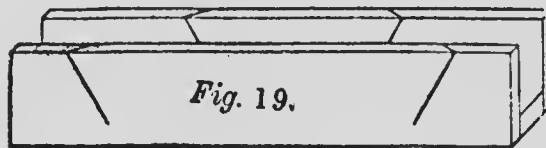

*Fig. 20*



*Fig. 22.*


of thin stuff, and are beveled on the back at the bottom in such a manner that the top portion of the member hangs over, which gives it the appearance of being solid. Mouldings of this kind are called

"spring mouldings," and much care is required in mitring them. This should always be done in a miter box, which must be made for the purpose; often two boxes are required, as shown in Figs. 19-22. The cuts across the box are regular miters, while the angles down the side are the same as the down cut of the rafter, or plumb cut of the moulding. When the box is ready, place the mouldings in it upside down, keeping the moulded side to the front, as seen in Fig. 20,

making sure that the level of the moulding at *c* fits close to the side of the box.

To miter the rake mouldings together at the top, the box shown in Fig. 21 is used. The angles on the top of the box are the same as the down bevel at the top of the rafter, the sides being sawed down square. Put the moulding in the box, as shown in Fig. 22, keeping the bevel at *c* flat on the bottom of the box, and having the moulded side to the front, and the miter for the top is cut, which completes the moulding for one side of the gable. The miter for the top of the moulding for the other side of the gable may then be cut.

When the rake moulding is made of the proper form these boxes are very convenient; but a great deal of the machine-made mouldings are

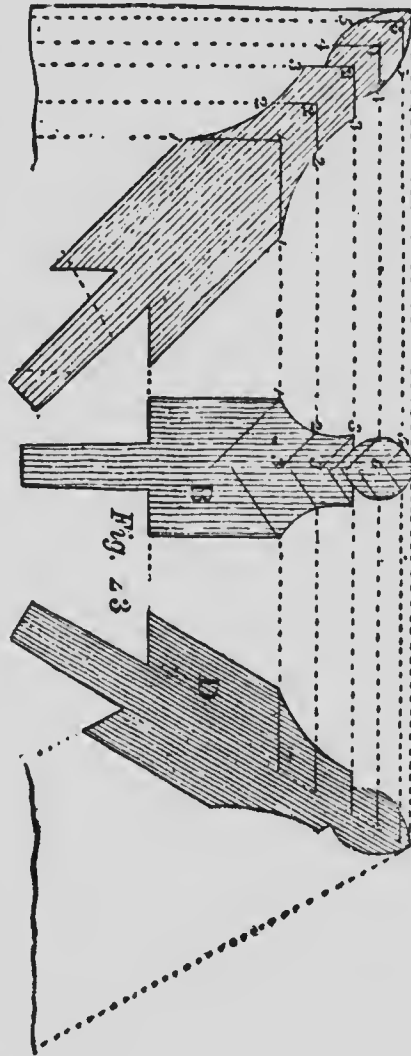

not of the proper form to fit. In such cases the moulding should be made to suit, or they come bad; although many use the mouldings as they come from the factory, and trim the miters so as to make them do.

The instructions given, however, in Figs. 13, 14, 15 and 18 will enable the workman to make patterns for what he requires.

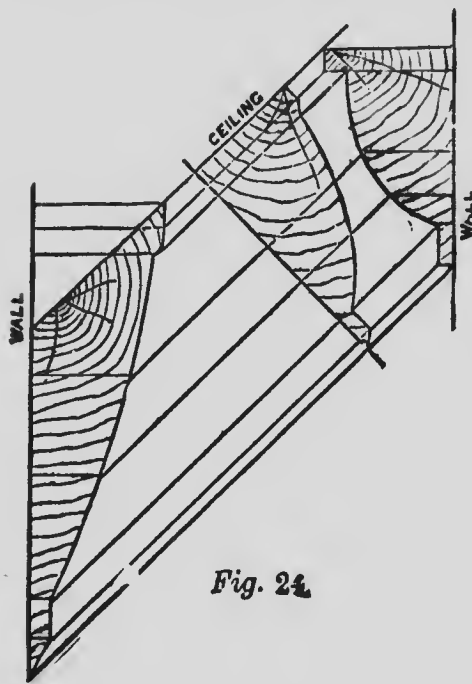


Fig. 24

While the "angle bar" is not much in vogue at the present time, the methods by which it is obtained, may be applied to many purposes, so it is but proper the method should be embodied in this work. In Fig. 23, B is a common sash bar, and C is the angle bar of the same thick-


ness. Take the raking projection, 11, in C, and set the foot of your compass in 1 at B, and cross the middle of the bar at the other 1; then draw the points 2, 2, 3, 3, etc., parallel to 11, then prick your bar at C from the ordinates so drawn at B, which, when traced, will give the angle bar

This is a simple operation, and may be applied to

many other cases, and for enlarging or diminishing mouldings or other work.

The next figure, 24, gives the lines for a raking moulding, such as a cornice in a room with a sloping ceiling. As may be seen from the diagram the three sections shown are drawn equal in thickness to miter at the angles of the room.

The construction should be easily understood. When a straight moulding is mitered with a curved one the line of miter is sometimes straight and sometimes curved, as seen at Fig. 18, and when the mouldings are all curved the miters are also straight and curved, as shown in previous examples.

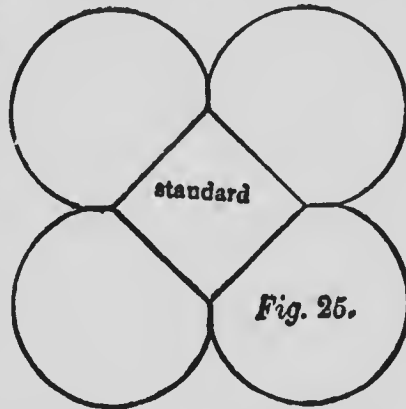

If it is desired to make a cluster column of wood, it is first necessary to make a standard or core, which must have as many sides as there are to be faces of columns.

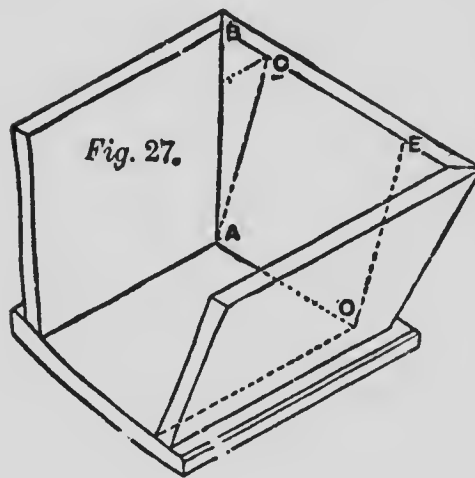


Fig. 26.

Fig. 25 shows how the work is done. This shows a cluster of four columns, which are nailed to a square standard or core. Fig. 26 shows the base of a clustered column. These are blocks turned in the lathe, requiring four of them for each base, which are cut and mitered as shown in Fig. 25. The cap, or capital, is, of course, cut in the same manner.

Laying out lines for hopper cuts is often puzzling, and on this account I will devote more space to this subject than to those requiring less explanations.

Fig. 27 shows an isometric view of three sides of a hopper. The fourth side, or end, is purposely left out, in order to show the exact build of the hopper. It will be noticed that AC and EO show the end of the




work as squared up from the bottom, and that BC shows the gain of the splay or flare. This gives the idea of what a hopper is, though the width of side and amount of flare may be any measurement that may be decided upon. The difficulty in this work is to get

the proper lines for the miter and for a butt cut.

Let us suppose the flare of the sides and ends to be as shown at Fig. 28, though any flare or inclination will answer equally well. This diagram and the plan exhibit the method to be employed, where the sides and ends are to be mitered together. To obtain the bevel to apply for the side cut, use  $A'$  as center,  $B'$  as radius, and  $CDF'$  parallel to  $BF$ . Project from  $B$  to  $D$  parallel to  $XY$ . Join  $AD$ , which gives the bevel required, as shown. If the top edge of the stuff is to be horizontal, as shown at  $B'G'$ , the bevel to apply to the edge will be simply as shown in plan by  $BG$ ; but if




the edge of the stuff is to be square to the side, as shown at  $B'C'$ , Fig. 29, the bevel must be obtained as follows: Produce  $EB'$  to  $D'$ , as indicated, Fig. 29. With  $B$  as center, describe the arc from  $C'$ , which gives the point  $D$ . Project down from  $D$ , making  $DF$

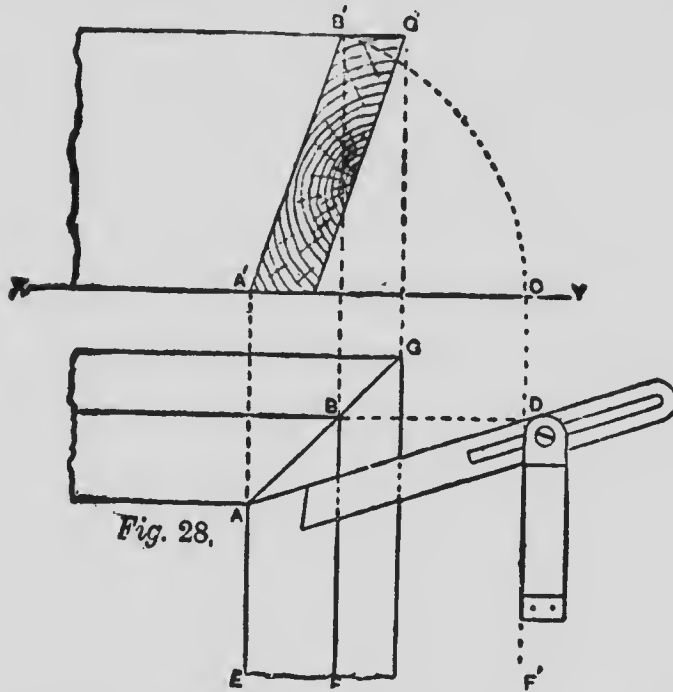

parallel to  $CC$ , as shown. Project from  $C$  parallel to  $XY$ . This will give the point  $D$ . Join  $BD$ , and this will give the bevel line required. At  $A$ , Fig. 31, is shown the application of the bevel to the side of the stuff, and at  $B$  the application of the bevel to the edge of the stuff. When the ends butt to the sides, as indicated at  $H$ , Fig. 30, the bevel, it will be noticed, is obtained in a similar manner to that shown at Fig. 28. It is not often that simply a butt joint is used between

the ends and sides, but the ends are usually housed into the sides, as indicated by the dotted lines shown at H, Fig. 30.

Another system, which was first taught by the celebrated Peter Nicholson, and afterwards by Robert

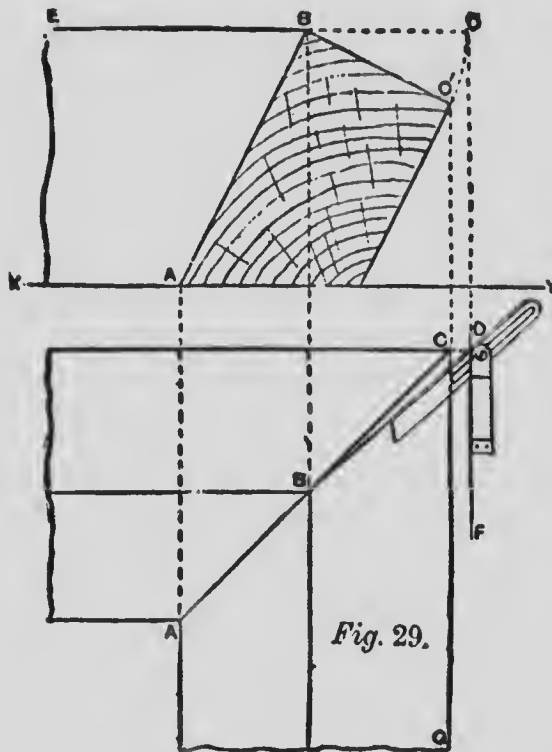


*Fig. 29.*

Riddell, of Philadelphia, is explained in the following: The illustration shown at Fig. 32 is intended to show how to find the lines for cutting butt joints for a hopper. Construct a right angle, as A, B, C, Fig. 32, continue A, B past K. From K, B make

the inclination of the sides of the hopper, 2, 3.

Draw 3, 4 at right angles with 3, 2; take 3 as center, and strike an arc touching the lower line, cutting in 4. Draw from 4, cutting the miter line in 5; from 5 square draw a line cutting in 6. join it and B; this gives bevel W, as the direction of cut on the surface of sides. To find the butt joint, take any two points, A, C, on the

right angle, equally distant from B, make the angle B, K, L, equal that of 3, K, L, shown on the left; from B draw through point L; now take C as a center, and strike an arc, touching line BL. From A draw a line touching the arc at H, and cutting the extended line through B in N, thus fixing N as a point. Then by drawing from C through N, we get the bevel X for the butt joint. Joints on the ends of timbers running horizontally in tapered framed structures, when the plan is square and the inclinations equal, may be found by this method.

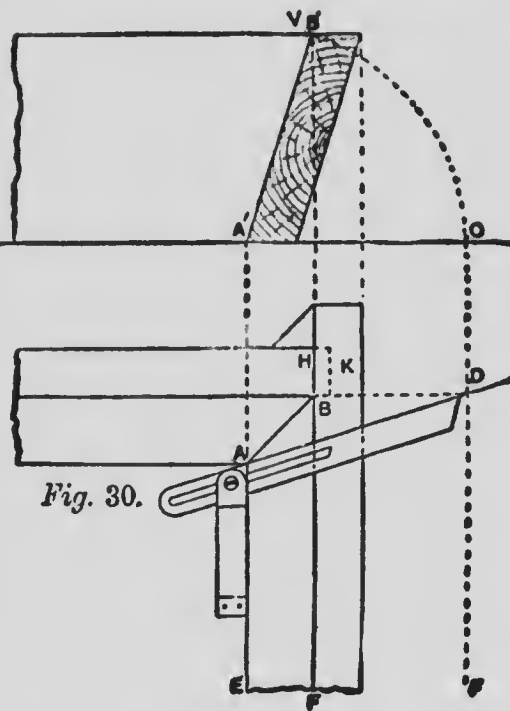


The backing of a hip rafter may also be obtained by this method, as shown at J, where the pitch line is used as at 2, 3, which would be the inclination of the roof.

The solution just rendered is intended only for hoppers having right angles and equal pitches or splays, as hoppers having acute or obtuse angles, must be treated in a slightly different way.

Let us suppose a butt joint for a hopper having an

acute angle, such as shown at A, B, C, Fig. 33, and with an inclination as shown at 2, 3. Take any two points, A, C, equally distant from B. Join A, C, bisect this line in P, draw through P, indefinitely. Find a bevel for the side cut by drawing 3, 4, square with 2, 3; take 3 as a center, and strike an arc, touching the lower line cutting in 4; draw from 4, cutting

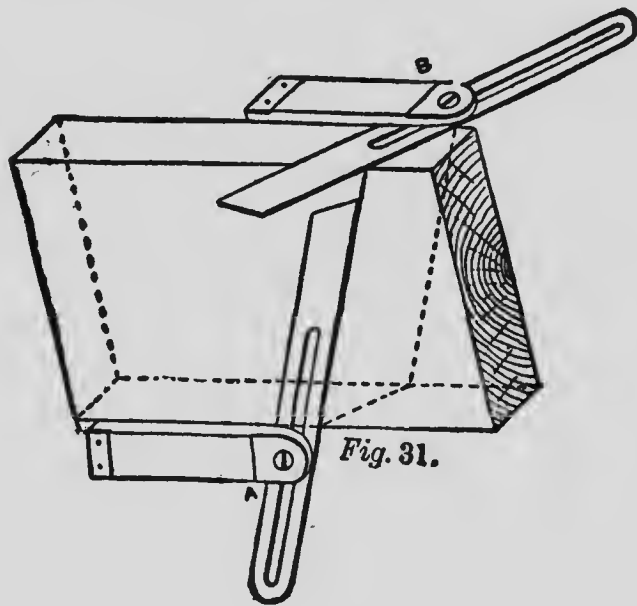

the miter line in 5, and from it square draw a line cutting in 6. Join 6, B, this gives bevel W, for direction of cut on the surface of inclined sides.

The bevel for a butt joint is found by drawing C, 8, square with A, B; make the angle 8, K, L, equal that of 3, K, L, shown on the left. Draw from 8 through point L; take C as a center and strike an arc touching the line 8, L; draw from A, touching the arc at D, cutting

the line from P, in D, making it a point, then by drawing from C, through D, we get the bevel X for the butt joint.

As stated regarding the previous illustration, the backing for a hip in a roof having the pitch as shown at 2, 3, may be found at the bevel J. The same rule

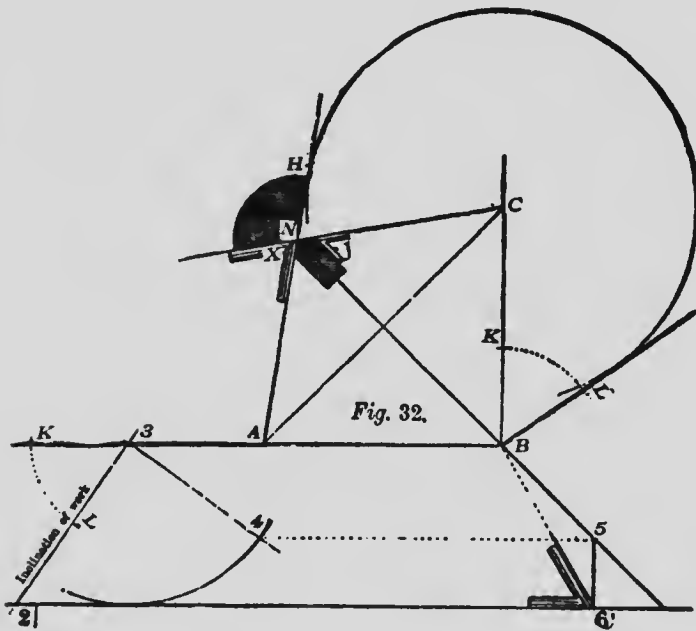


Fig. 32.

also applies to end joints on timbers placed in a horizontal double inclined frame, having an acute angle same as described.


Having described the methods for finding the butt joints in right-angled and acute-angled hoppers, it will be proper now to define a method for describing an obtuse-angled hopper having butt joints.

Let the inclination of the sides of the hopper be




To obtain the bevels or miters is a simple matter to one who has mastered the foregoing, as evidenced by the following:

Fig. 34 shows a right-angled hopper; its sides may stand on any inclination, as AB. The miter line,

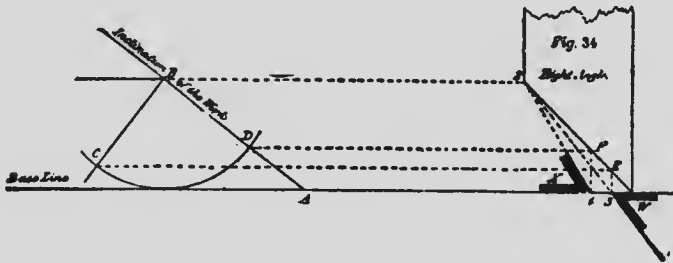

2, W, on the plan, being fixed, draw B, C square with the inclination. Then from B, as center, strike an arc, touching the base line and cutting in CD. From CD draw parallel with the base line, cutting the miters in F and E; and from these points square down the lines, cutting in 3 and 4. From 2 draw through 3; this gives

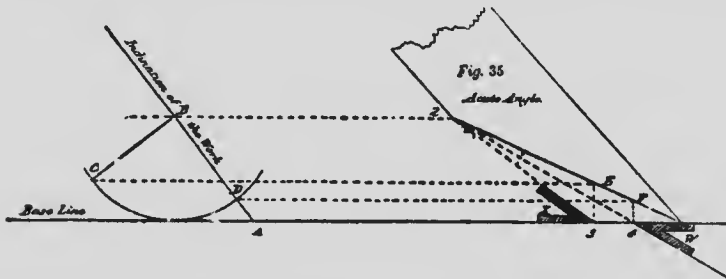


bevel W for the direction of cut on the surface sides. Now join 2, 4, this gives bevel X to miter the edges, which in all cases must be square, in order that bevels may be properly applied.

Fig. 35 shows a plan forming an acute-angled hop-

per, the miter line being 2, W. The sides of this plan are to stand on the inclination AB. Draw BC square with the inclination, and from B, as center, strike an arc, touching the base line and cutting in CD. Draw from CD, cutting the miter line at E and F; from these points square down the lines, cutting in 3 and 4. From 2 draw through 4, which will give bevel W to miter the edges of sides. Now join 2, 3, which gives bevel X for the direction of cut on the surface of sides.


Fig. 36 shows an obtuse angled hopper, its miter line on the plan being 2 W, and the inclination of sides

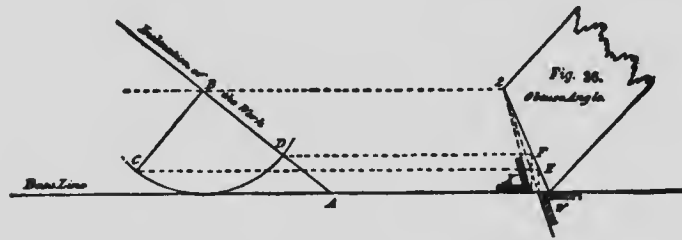

AB. Draw BC square with the inclination, and from B as center strike an arc, touching the base line and cutting CD. Draw from CD, cutting the miter in F and E. From these points square down the lines, cutting the base; then by drawing from 2 through the point below E, we get bevel W for the direction of cut on the surface of sides, and in like manner the point below F being joined with 2, gives bevel X to miter the edges.

It will be noticed that the cuts for the three different angles are obtained on exactly the same principle, without the slightest variation, and so perfectly simple as to be understood by a glance at the drawing. The workman will notice that in each of the angles a




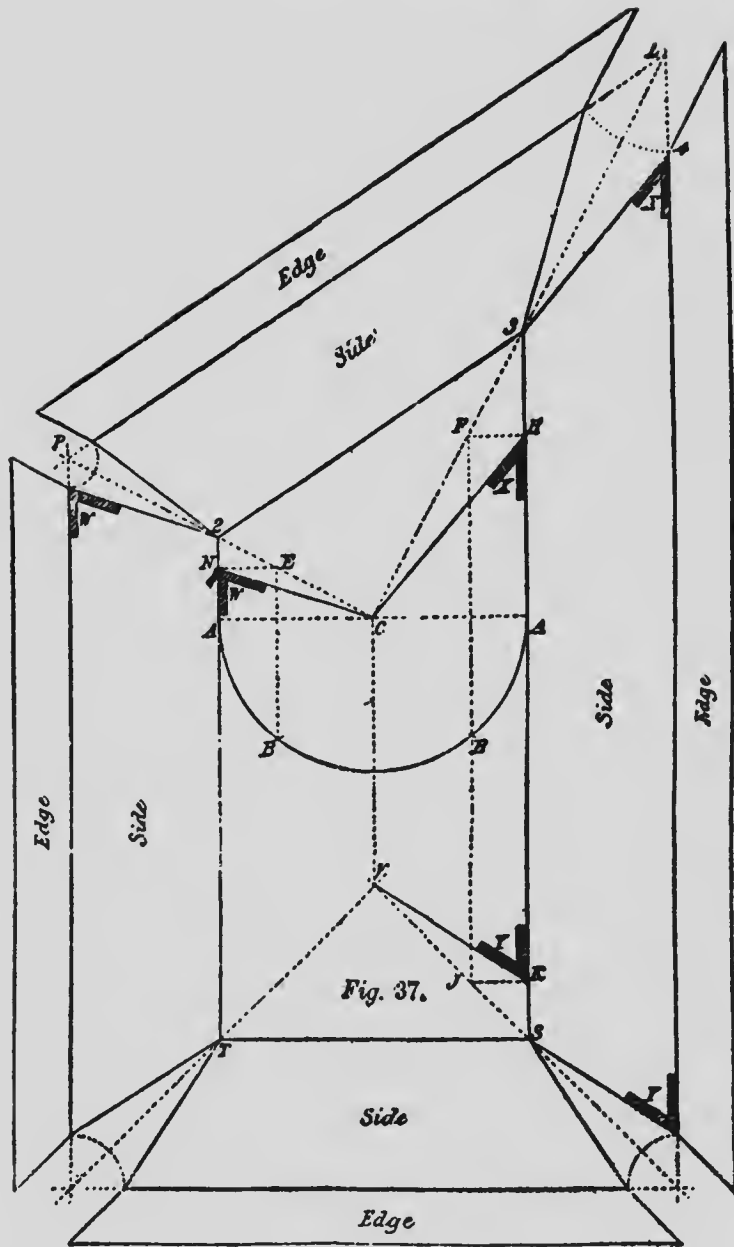

line from C, cutting the miter, invariably gives a direction for the surface of sides, and the line from D directs the miter on their edges.

Unlike many other systems employed, this one meets all and every condition, and is the system that has been employed by high class workmen and millwrights for ages.

One more example on hopper work and I am done with the subject: Suppose it is desired to build a hopper similar to the one shown at Fig. 37, several

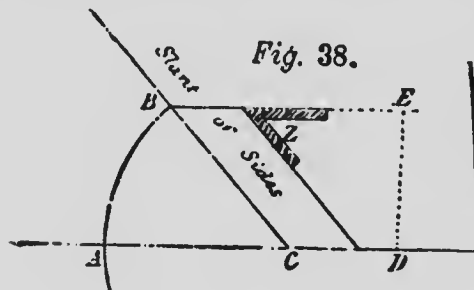

new conditions will be met with, as will be seen by an examination of the obtuse and acute angles, L and P. In order to work this out right make a diagram like

that shown at Fig. 38, where the line AD is the given base line on which the slanting side of hopper or box rises at any angle to the base line, as CB, and the total height of the work is represented by the line B, E. By this diagram it will be seen that the horizontal lines or bevels of the slanting sides are indicated by the bevel Z.

Having got this diagram, which of course is not drawn to scale, well in hand, the ground plan of the hopper may be laid down in such a shape as desired, with the sides, of course, having the slant as given in Fig. 38.

Take T2, 3S, Fig. 37, as a part of the plan, then set off the width of sides equal to C, B, as shown in Fig. 38.

These are shown to intersect at P, L above; then draw lines from P, L through 2, 3, until they intersect at C, as the dotted lines show. Take C as a center, and with the radius A, describe the semi-circle A, A, and with the same radius transferred to C, Fig. 38, describe the arc A, B, as shown. Again, with the same radius, set off A, B, A, B on Fig. 37, cutting the semi-circle at B, as shown. Now draw through B, on the right, parallel with S, 3, cutting at J and F; square over F, H and J, K, and join H, C; this gives bevel X, as the cut for face of sides, which come together at the angle shown at 3. The miters on the edge of stuff are parallel with the dotted line, L, 3. This is the acute corner of the hopper, and as the edges are worked off to the bevel 2, as shown in Fig. 38, the miter must be correct.

Having mastered the details of the acute corner, the square corner at S will be next in order. The first step is to join K, V, which gives the bevel Y, for the cut on the face of sides on the ends, which form the square corners. The method of obtaining these lines is the same as that explained for obtaining them for the acute-angled corner, as shown by the dotted lines, Fig. 35. As the angles, S, T, are both square, being right and left, the same operation answers both, that is, the bevel Y does for both corners.

Coming to the obtuse angle, P, 2, we draw a line B, E, on the left, parallel with A, 2, cutting at E, as shown by dotted line. Square over at E, cutting T, A, 2 at N; join N, C, which will give the bevel W, which is the angle of cut for face of sides. The miters on edges are found by drawing a line parallel with P, 2.

In this problem, like Fig. 34, every line necessary to the cutting of a hopper after the plan as shown by

the boundary lines 2, 3, T, S, is complete and exhaustive, but it must be understood that in actual work the spreading out of the sides, as here exhibited, will not be necessary, as the angles will find themselves when the work is put together. When the plan of the base—which is the small end of the hopper in this case—is given, and the slant or inclination of the sides known, the rest may be easily obtained. In order to become thoroughly conversant with the problem, I would advise the workman to have the drawing made on cardboard, so as to cut out all the outer lines, including the open corners, which form the miters, leaving the whole piece loose. Then make slight cuts in the back of the cardboard, opposite the lines 2, 3, S, T, just deep enough to admit of the cardboard being bent upwards on the cut lines without breaking. Then run the knife along the lines, which indicates the edges of the hopper sides. This cut must be made on the face side of the drawing, so as to admit of the edge being turned downwards. After all cuts are made raise the sides until the corners come closely together, and let the edges fall level, or in such a position that the miters come closely together. If the lines have been drawn accurately and the cuts made on the lines in a proper manner, the work will adjust itself nicely, and the sides will have the exact inclination shown at Fig. 38, and a perfect model of the work will be the result.

This is a very interesting problem, and the working out of it, as suggested, cannot but afford both profit and pleasure to the young workman.


From what has preceded, it must be evident to the workman that the lines giving proper angles and bevels for the corner post of a hopper must of neces-

sity give the proper lines for the corner post for a pyramidal building, such as a railway tank frame, or any similar structure. True, the position of the post is inverted, as in the hopper, its top falls outward, while in the timber structure the top inclines inward; but this makes no difference in the theory, all the operator has to bear in mind is that the hopper in this case is reversed—inverted. Once the proper shape of the corner post has been obtained, all other bevels can readily be found, as the side cuts for joists and braces can be taken from them. A study of these two figures in this direction will lead the student up to a correct knowledge of tapered framing.

## CHAPTER II

### COVERING SOLIDS, CIRCULAR WORK, DOVETAILING AND STAIRS

There are several ways to cover a circular tower roof. Some are covered by bending the boarding around

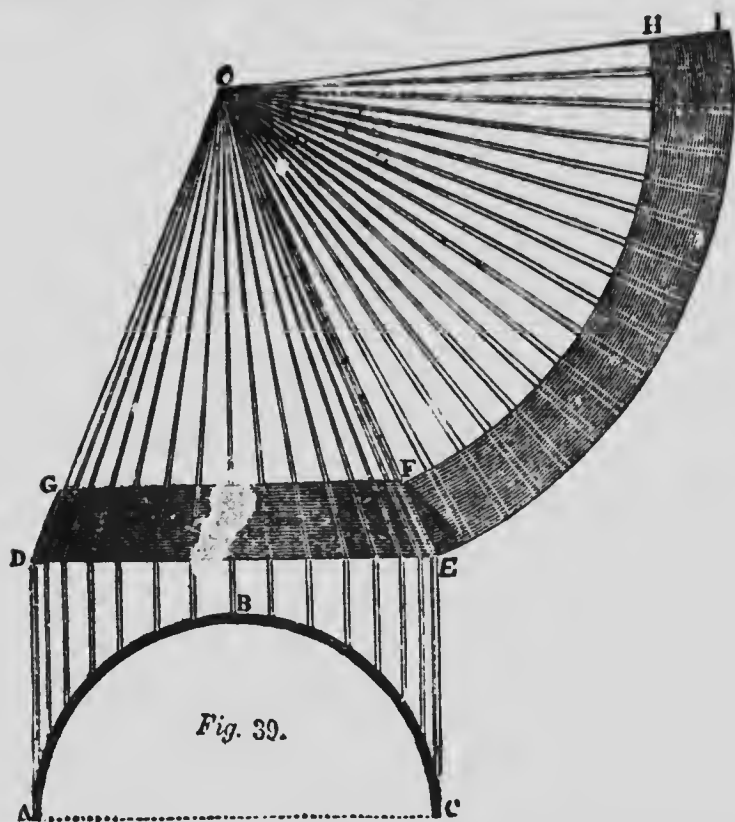

*Fig. 39.*

them, while others have the joints of the covering vertical, or inclined. In either case, the boarding has to be cut to shape. In the first instance, where the joints

are horizontal, the covering must be curved on both edges.

At Fig. 39 I show a part plan, elevation, and development of a conical tower roof. ABC shows half the plan; DO and EO show the inclination and height of the tower, while EH and EI show the development of the lower course of covering. This is obtained by using O as a center, with OE as radius, and striking the curve EI, which is the lower edge of the board, and corresponds to DE in the elevation. From the same center O, with radius OF, describe the curve FH, which is the joint GF on the elevation. The board, EFHI, may be any convenient width, as may also the other boards used for covering, but whatever the width decided upon, that same width must be continued throughout that course. The remaining tiers of covering must be obtained in the same way. The joints are radial lines from the center O. Any convenient length of stuff over the distance of three ribs, or rafters, will answer. This solution is applicable to many kinds of work. The rafters in this case are simply straight scantlings; the bevels for feet and points may be obtained from the diagram. The shape of a "gore," when such is required, is shown at Fig. 40, IJK showing the base, and L, the top or apex. The method of getting it out will be easily understood by examining the diagram. When "gores" are used for covering it will be necessary


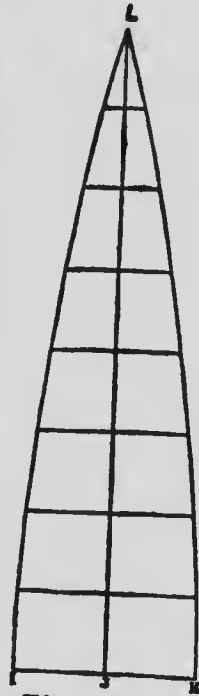


Fig. 40.

to have cross-ribs nailed in between the rafters, and these must be cut to the sweep of the circle, where they are nailed in, so that a rib placed in half way up will require only to be half the diameter of the base, and the other ribs must be cut accordingly.


To cover a domical roof with horizontal boarding we proceed in the manner shown in Fig. 41, where ABC

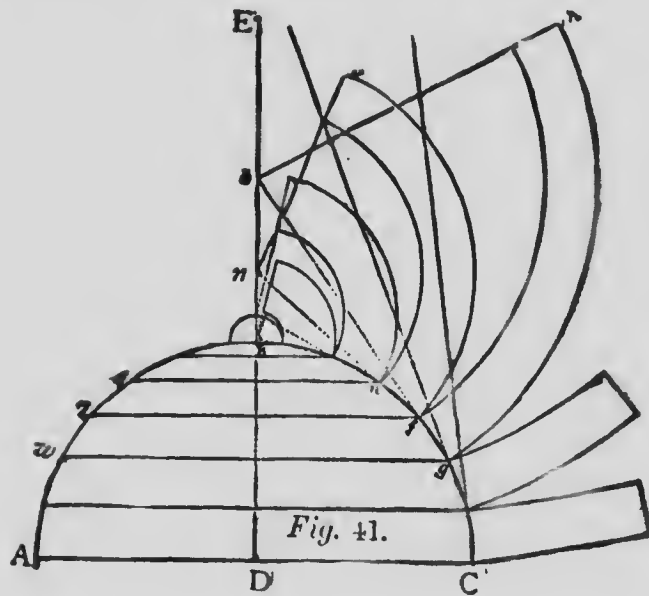

is a vertical section through the axis of a circular dome, and it is required to cover this dome horizontally. Bisect the base in the point D, and draw DBE perpendicular to AC, cutting the circumference in B. Now divide the arc, BC, into equal parts, so that each part will be rather less than the width of a board, and join the points of division by straight lines, which will form an inscribed polygon of so many sides; and through these points draw lines parallel to




the base AC, meeting the opposite sides of the circumference. The trapezoids formed by the sides of the polygon and the horizontal lines may then be regarded as the sections of so many frustrums of cones; whence results the following mode of procedure: Produce, until they meet the line DE, the lines FG, etc., forming the sides of the polygon. Then to describe a board which corresponds to the surface of one of the zones, as FG, of which the trapezoid is a section from

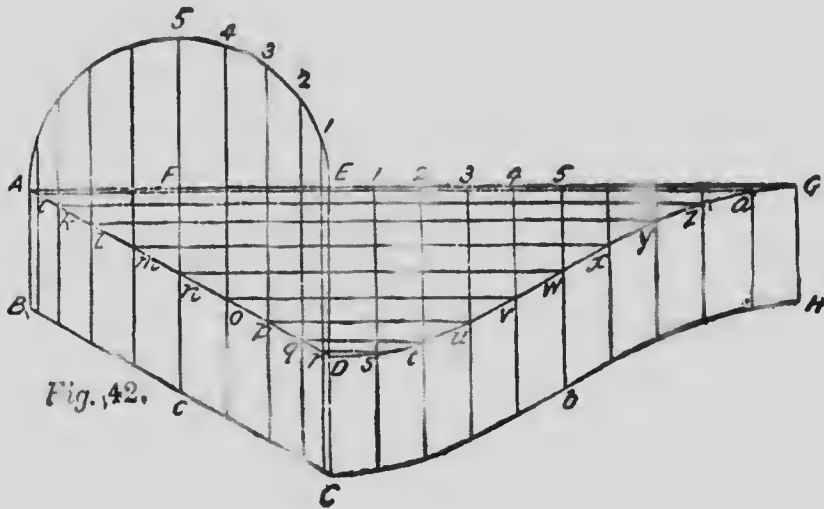

the point L, where the line FG produced meets DE, with the radii EF, EG describe two arcs and cut off the end of the board K on the line of a radius EK. The other boards are described in the same manner.

There are many other solids, some of which it is possible the workman may be called upon to cover, but as space will not admit of us discussing them all, we will illustrate one example, which includes within itself the principles by which almost any other solid

may be dealt with. Let us suppose a tower, having a domical roof, rising from another roof having an inclination as shown at BC, Fig. 42, and we wish to board

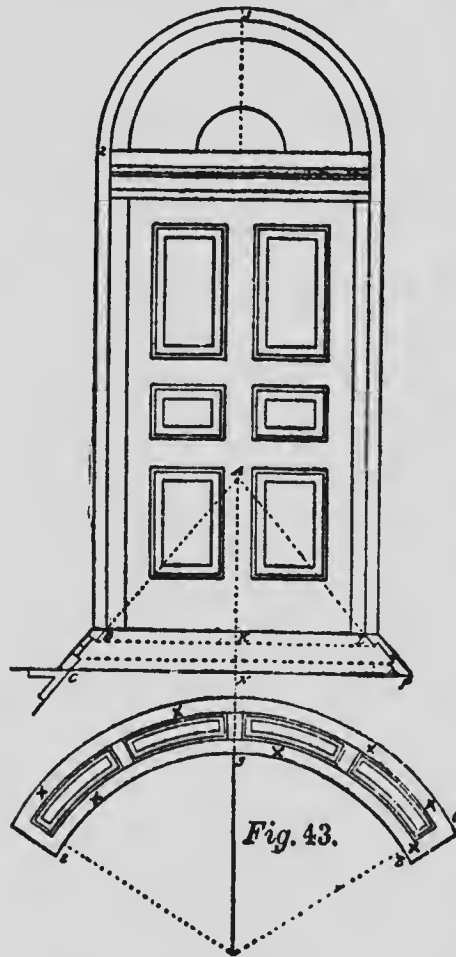


it with the joints of the boards on the same inclination as that of the roof through which the tower rises. To accomplish this, let A, B, C, D, Fig. 42, be the seat of the generating section; from A draw AG perpendicular to AB, and produce CD to meet it in E; on A, E describe the semi-circle, and transfer its perimeter to E, G by dividing it into equal parts, and setting off corresponding divisions on E, G. Through the divisions of the semi-circle draw lines at right angles to AE, producing them to meet the

lines A, D and B, C in *i, k, l, m*, etc. Through the divisions on E, G, draw lines perpendicular to them; then through the intersections of the ordinates of the


semi-circle, with the line AD draw the lines *i, a, k, z, l, y*, etc., parallel to AG, and where these intersect the perpendiculars from EG, in points *a, z, y, x, w, v, u*, etc., trace a curved line, GD, and draw parallel to it the curved line HC; then will DC, HG be the development of the covering required.

Almost any description of dome, cone, ogee or other solid may be developed, or so dealt with under the principle as shown in the foregoing, that the workman, it is hoped, will experience but little difficulty in laying out lines for cutting material to cover any form of curved roof he may be confronted with.

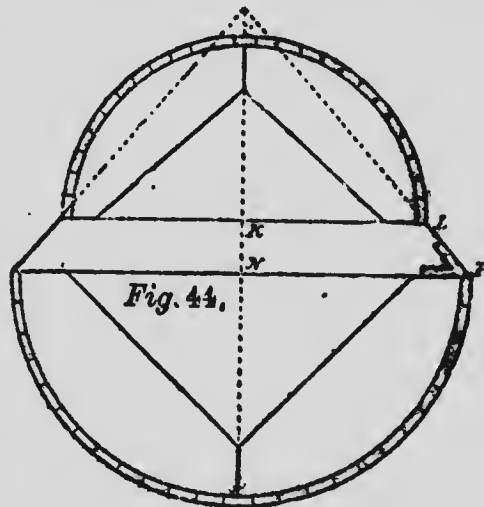

Another class of covering is that of making soffits for splayed doors or windows having circular or segmental heads, such as shown in Fig. 43, which exhibits a door with a circular head and splayed jambs. The head or soffit is also splayed and is paneled as shown. In order to obtain the curved soffit, to show the same splay or angle, from the vertical lines of the door, proceed as follows: Lay out the width of the doorway, showing the splay of the jambs, as at C, B and L, P; extend the angle lines, as shown by the dotted lines, to A, which gives A, B as the radius of the

inside curve, and A, C as radius of the outside curve. These radii correspond to the radii A, B and A, C in Fig. 43; the figure showing the flat plan of the paneled soffit complete. To find the development, Fig. 43, get the stretch-out of the quarter circle 2 and 3, shown in the elevation at the top of the doorway, and

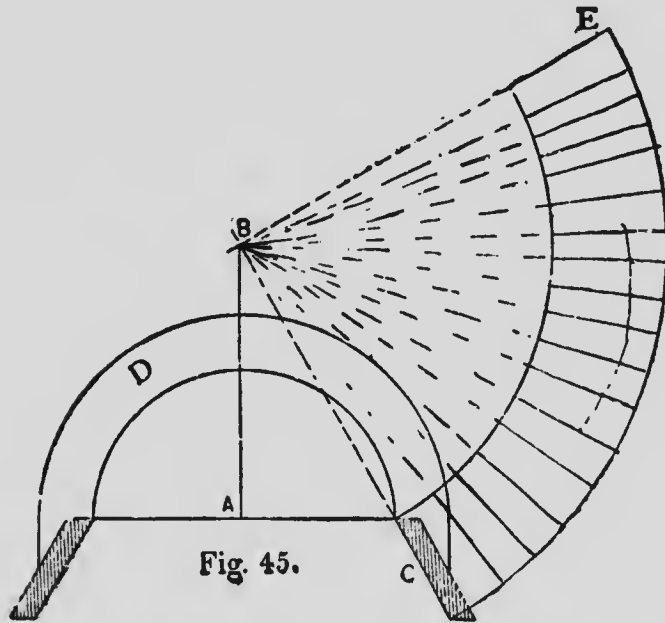


make 2, 3 and 3B, Fig. 43, equal to it, and the rest of the work is very simple.

If the soffit is to be laid off into panels, as shown at Fig. 44, it is best to prepare a veneer, having its edges curved similar to those of Fig. 43, making the veneer of some flexible wood, such as basswood, elm or the like, that will easily bend over a form, such as is shown at Fig. 44. The shape of this form is a portion of a cone, the circle L being less in diameter than the

circle P. The whole is covered with staves, which, of course, will be tapered to meet the situation. The veneer, x, x, etc., Fig. 43, may then be bent over the form and finished to suit the conditions. If the mouldings used in the panel work are bolection mouldings, they cannot be planted in place until after the veneer is taken off the form.

This method of dealing with splayed work is applicable to windows as well as doors, to circular pews in

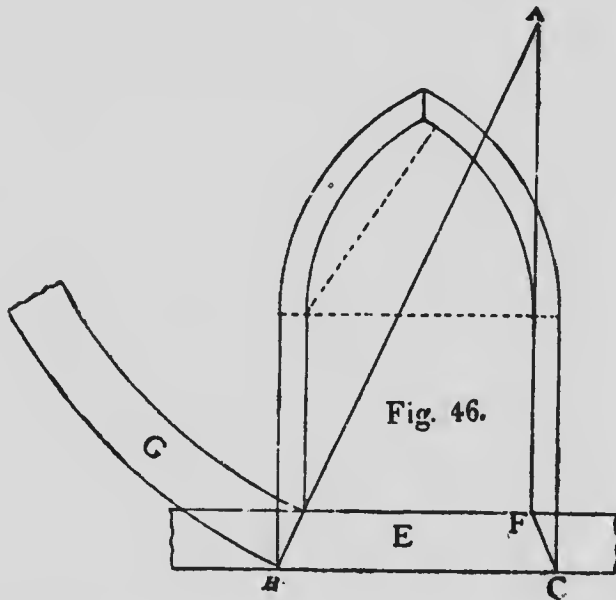

churches and many other places where splayed work is required.

A simple method of finding the veneer for a soffit of the form shown in Fig. 43 is shown at Fig. 45. The splay is seen at C, from which a line is drawn on the angle of the splay to B through which the vertical line A passes. B forms the center from which the veneer

is described. A is the center of the circular head, for both inside and outside curves, as shown at D. The radial lines centering at B show how to kerf the stuff when necessary for bending. The line E is at right angles with the line CB, and the veneer CE is the proper length to run half way around the soffit. The joints are radial lines just as shown.

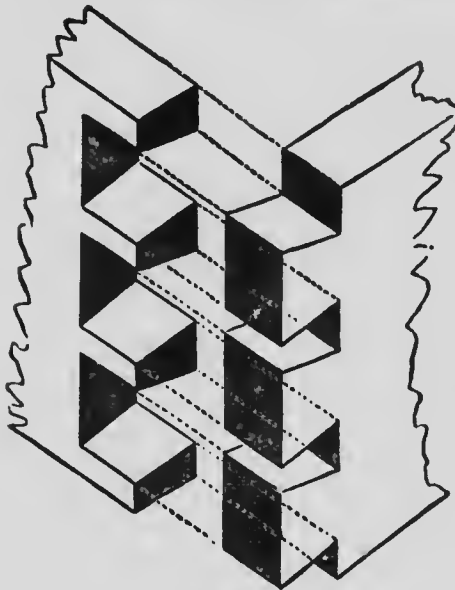


Fig. 47.

A method for obtaining the correct shape of a veneer for a gothic splayed window or door-head, is shown at Fig. 46; E shows the sill, and line BA the angle of splay. BC shows the outside of the splay; erect the inside line F to A, and this point will form the center from which to describe the curve or veneer G. This

veneer will be the proper shape to bend in the soffit on either side of the window head.

The art of dovetailing is almost obsolete among carpenters, as most of this kind of work is now done by cabinet-makers, or by a few special workmen in the factories. It will be well, however, to preserve the art, and every young workman should not rest until he can do a good job of work in dovetailing; he will not find it a difficult operation.

There are three kinds of dovetailing, i.e., the common dovetail, Fig. 47; the lapped dovetail, Fig. 48, and the secret, or mitered dovetail, Fig. 49. These may be subdivided into other kinds of dovetailing, but there will be but little difference.

The common dovetail is the strongest, but shows the ends of the dovetails on both faces of the angles,

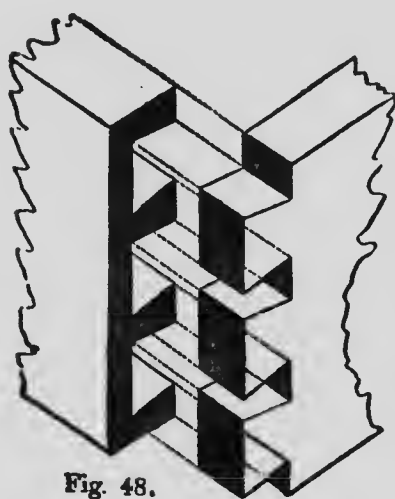


Fig. 48.

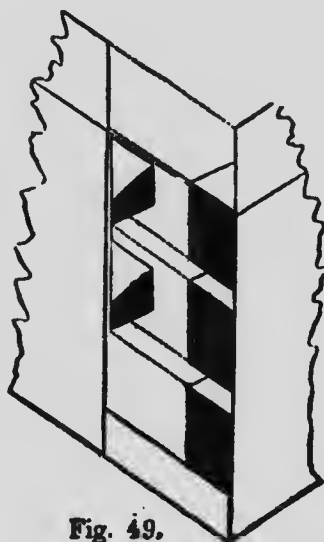


Fig. 49.

and is, therefore, only used in such places as that of a drawer, where the external angle is not seen.

The lapped dovetail, where the ends of the dovetails show on one side of the angle only, is used in such places as the front of a drawer, the side being only seen when opened.

In the miter or secret dovetail, the dovetails are not seen at all. It is the weakest of the three kinds.

At Figs. 50 and 51 I show two methods of dovetailing hoppers, trays and other splayed work. The reference letters A and B show that when the work is together A will stand directly over B. Care must be

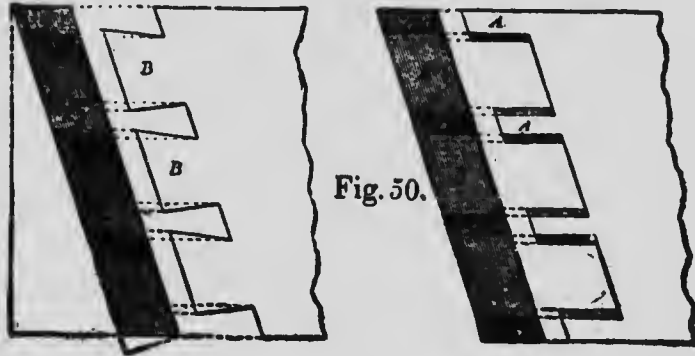


Fig. 50.

taken when preparing the ends of stuff for dovetailing for hoppers, trays, etc., that the right bevels and angles are obtained, according to the rules explained

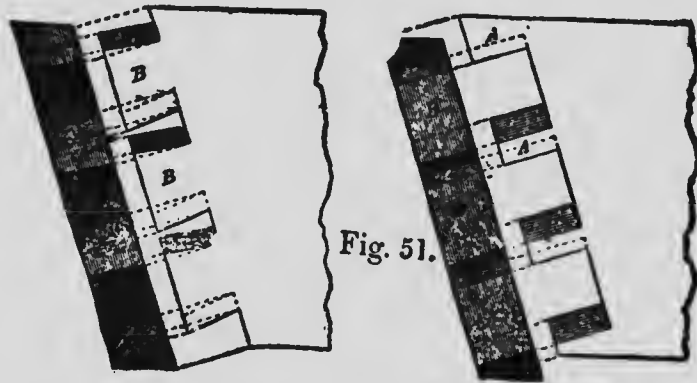


Fig. 51.

for finding the cuts and bevels for hoppers and work of a similar kind, in the examples given previously. All stuff for hopper work intending to be dovetailed




must be prepared with butt joints before the dovetails are laid out. Joints of this kind may be made common, lapped or mitered. In making the latter much skill and labor will be required.

Stair building and handrailing combined is a science in itself, and one that taxes the best skill in the market, and it will be impossible for me to do more than touch the subject, and that in such a manner as to enable the workman to lay out an ordinary straight flight of stairs. For further instructions in stair building I would refer my readers to some one or two of the many works on the subject that can be obtained from any dealer in mechanical or scientific books.

The first thing the stair builder has to ascertain is the dimension of the space the stairs are to occupy; then he must get the height, or the risers, and the width of the treads, and, as architects generally draw the plan of the stairs, showing the space they are to occupy and the number of treads, the stair builder has only to measure the height from floor to floor and divide by the number of risers and the distance from first to last riser, and divide by the number of treads. (This refers only to straight stairs.) Let us take an example: Say that we have ten feet of height and fifteen feet ten inches of run, and we have nineteen treads; thus fifteen feet ten inches divided by nineteen gives us ten inches for the width of the tread, and we have ten feet rise divided by twenty (observe here that there is always one more riser than tread), which gives us six inches for the height of the riser. The pitch-board must now be made, and as all the work has to be set out from it, care must be taken to make it exactly right. Take a piece of board, same as shown

in Fig. 52, about half an inch thick, dress it and square the side and end, A, B, C; set off the height of the rise from A to B, and the width of the tread from B to C; now cut the line AC, and the pitch-board is complete, as shown in Fig. 53. This may be done by the steel square as shown at Fig. 54. To get the width of string-boards draw the line AB, Fig. 53; add to the length of this line about half an inch more at A, the margin to be allowed, and the total will be the width of string-boards. Thus, say that we allow three inches

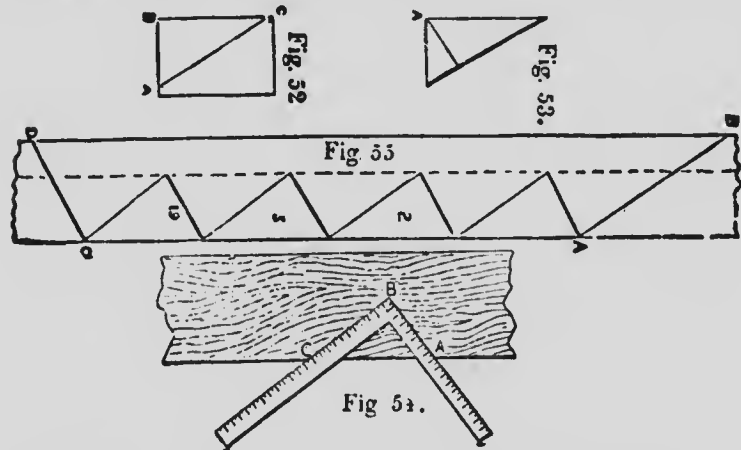

for margin, one-half inch to be left on the under side of string-board, will make the width of string-boards in this case about nine inches. Now get a plank, say one and a half inches, of any thickness that may be agreed upon, the length may be obtained by multiplying the longest side of the pitch-boards, AC, Fig. 52, by the number of risers; but as this is the only class of stairs that the length of string-boards can be obtained in this way I would recommend the beginner to practice the sure plan of taking the pitch-board and applying it as at 1, 2, 3, 19, Fig. 55. Drawing all the steps

this way will prevent a mistake that sometimes occurs, viz. the string-boards being cut too short. Cut the foot at the line AB, and the top, as at CD. This will give about one and a half inches more than the extreme length. Now cut out the treads and risers; the width of stair is, say, three feet, and we have one and a half inches on each side for string-boards. Allow three-eighths of an inch for housing on each side. This will make the length of tread and risers two and one-fourth inches less than the full width of stairs; and as the treads must project their own thickness over rise, which is, say, one and a half inches, the full size of tread will be two feet by eleven and one-half inches, and of the risers two feet nine and three-fourths inches by six inches; and observe that the first riser will be the thickness of the tread less than the others; it will be only four and one-half inches wide. The reason of this riser being less than the others is because it has a tread thickness extra.


I will now leave the beginner to prepare all his work. Dress the risers on one face and one edge; dress the treads on one face and both edges, making them all of equal width; gauge the ends and the face edge to the required thickness, and round off the nosings; dress the string-boards to one face and edge to match each other.

A plan of a stair having 13 risers and three winders below is shown at Fig. 56. This shows how the whole stair may be laid out. It is inclosed between two walls.

The beginner in stair-work had better resort to the old method of using a story-rod for getting the number of risers. Take a rod and mark on it the exact height from top of lower floor to top of next floor, then

divide up and mark off the number of risers required. There is always one more riser than tread in every flight of stairs. The first riser must be cut the thickness of the tread less than the others.

When there are winders, special treatment will be

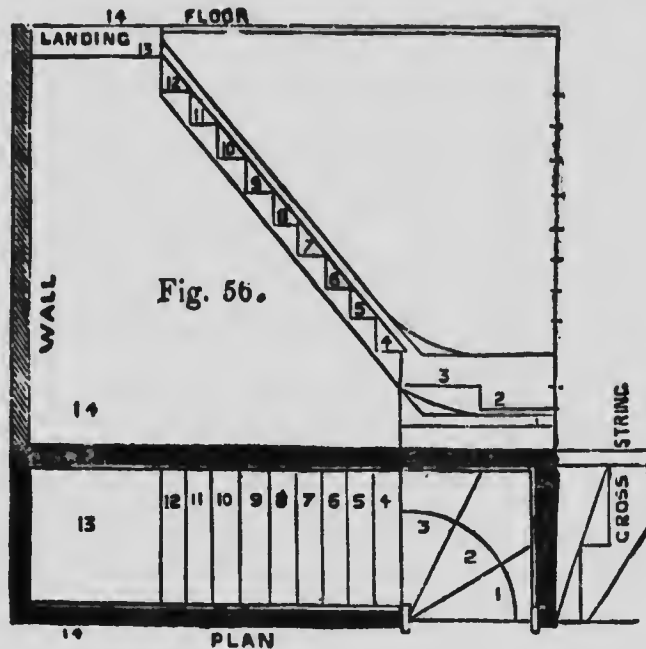

required, as shown in Fig. 56, for the treads, but the riser must always be the same width for each separate flight.


When the stair is straight and without winders, a rod may be used for laying off the steps. The width of the steps, or treads, will be governed somewhat by the space allotted for the run of the stairs.

There is a certain proportion existing between the tread and riser of a stair, that should be kept to as close as possible when laying out the work Architects

say that the exact measurement for a tread and riser should be sixteen inches, or thereabouts. That is, if a riser is made six inches, the tread should be ten inches wide, and so on. I give a table herewith, showing the rule generally made use of by stair builders for determining the widths of risers and treads:

Treads Inches	Risers Inches	Treads Inches	Risers Inches
5	9	12	5½
6	8½	13	5
7	8	14	4½
8	7½	15	4
9	7	16	3½
10	6½	17	3
11	6	18	2½

It is seldom, however that the proportion of the

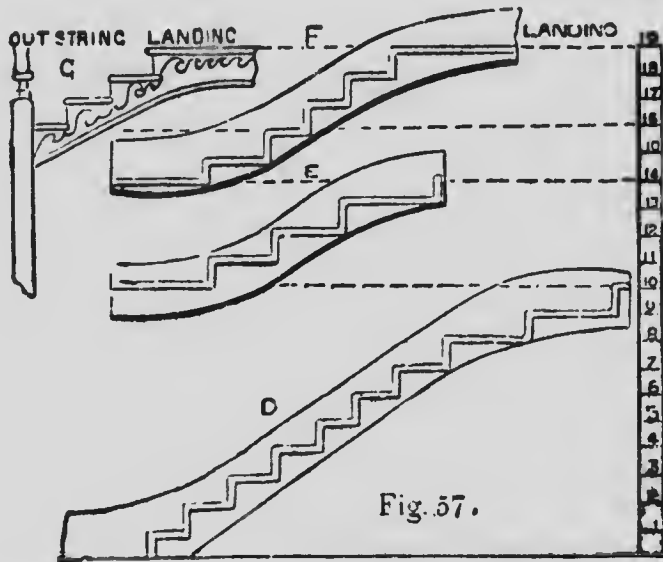

riser and step is exactly a matter of choice—the room

allotted to the stairs usually determines this proportion; but the above will be found a useful standard, to which it is desirable to approximate.

In better class buildings the number of steps is considered in the plan, which it is the business of the architect to arrange, and in such cases the height of the story-rod is simply divided to the number required.

An elevation of a stair with winders is shown at Fig. 57, where the story-rod is in evidence with the number of risers figured off.

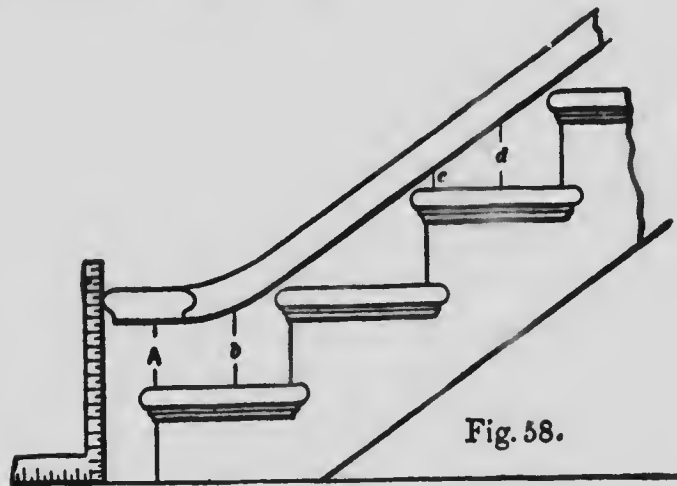


Fig. 58.

Fig. 58 shows a portion of an open string stair, with a part of the rail laid on it at AB, CD, and the newel cap with the projection at A. This shows how the cap should stand over the lower step.

Fig. 59 shows the manner of constructing the step; S represents the string, R the risers, T the tread, O the nosing and cove moulding, and B is a block glued or otherwise fastened to both riser and tread to render

them strong and firm. It will be seen the riser is let into the tread, and has a shoulder on the inside. The bottom of the riser is nailed to the back of the next lower tread, which binds the whole lower part together. The nosing of the stair is generally returned at the open end of the tread, and this covers the end wood of the tread and the joints of the balusters, as shown at Fig. 60.

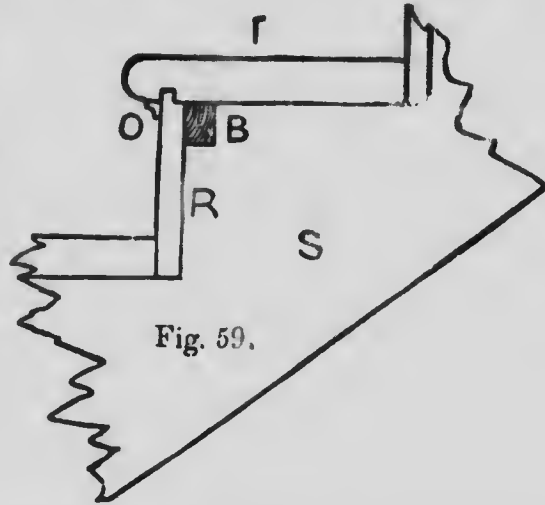


Fig. 59.

When a stair is bracketed, as shown at B, Fig. 60, the point of the riser on its string end should be left

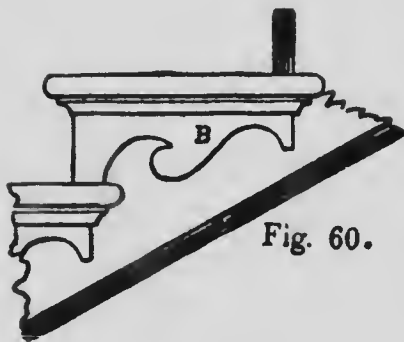


Fig. 60.

standing past the string the thickness of the bracket, and the end of the bracket miters against it, thus avoiding the necessity of showing end wood or joint. The cove should finish inside the length of the bracket, and the nosing should finish just outside the

length of the bracket. When brackets are employed

they should continue along the cylinder and all around the well-hole trimmers, though they may be varied to suit conditions when continuously running on a straight horizontal facia.




## CHAPTER III


### JOINER'S WORK—USEFUL MISCELLANEOUS EXAMPLES

I am well aware that workmen are always on the lookout for details of work, and welcome everything in this line that is new. While styles and shapes change from year to year, like fashion in women's dress, the principles of construction never change, and styles of finish in woodwork that may be in vogue to-day, may be old-fashioned and discarded next year, therefore it may not be wise to load these pages with many examples of finish as made use of to-day. A few examples, however, may not be out of place, so I close this section by offering a few pages of such details as I feel assured will be found useful for a long time to come.

Fig. 1 is a full page illustration of three examples of stairs and newels in modern styles. The upper one is a colonial stairway with a square newel, as shown at A. A baluster is also shown, so that the whole may be copied if required. The second example shows two newels and balusters, and paneled string and spandril AB, also section of paneled work on end of short flight. The third shows a plain open stair, with baluster and newel, the latter starting from first step.

At Fig. 2, which is also a full page, seven of the latest designs for doors are shown. Those marked

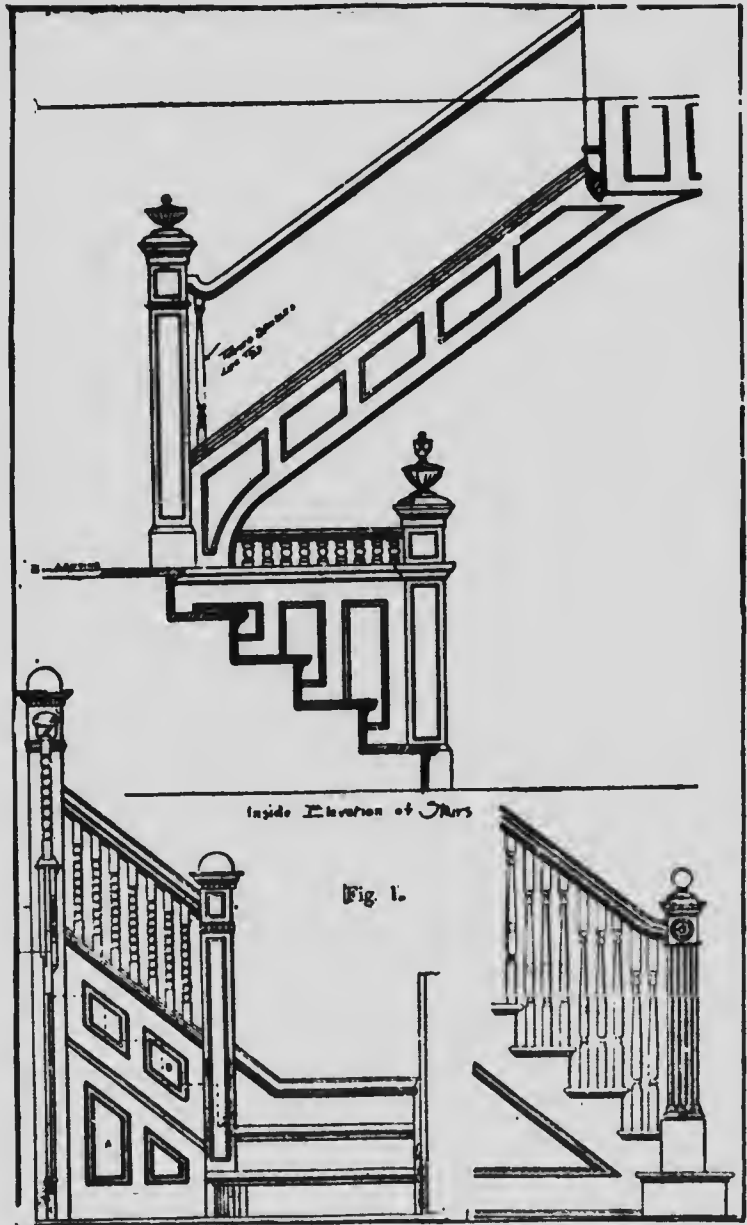

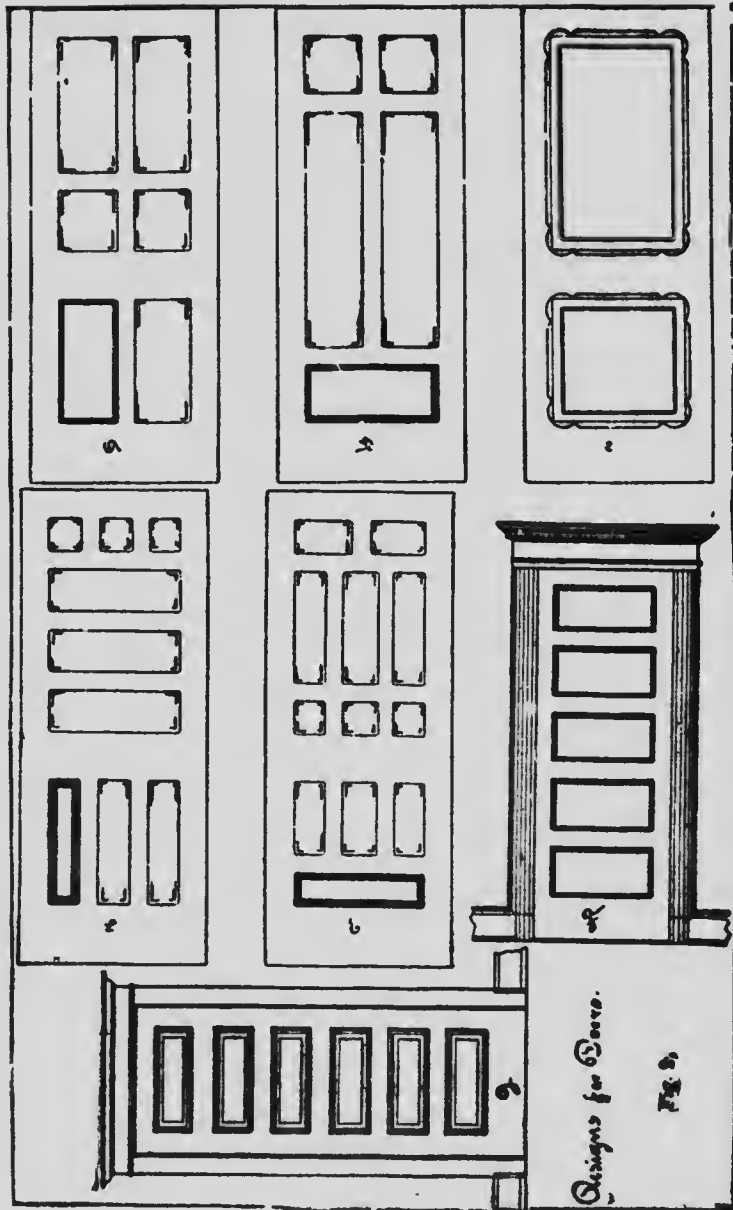

ABCD are more particularly employed for inside work, while F and G may be used on outside work; the five-paneled door being the more popular.

There are ten different illustrations, shown at Fig. 3, of various details. The five upper ones show the general method of constructing and finishing a window frame for weighted sash. The section A shows a part of a wall intended for brick veneering, the upper story being shingled or clapboarded.


The position of windows and method of finishing bottom of frame, both inside and out, are shown in this section, also manner of cutting joists for sill. The same method—on a larger scale—is shown at C, only the latter is intended for a balloon frame, which is to be boarded and sided on the outside.

At B another method for cutting joists for sill is shown, where the frame is a balloon one. This frame is supposed to be boarded inside and out, and grounds are planted on for finish, as shown at the base. There is also shown a carpet strip, or quarter-round. The outside is finished with siding.

The two smaller sections show foundation walls, heights of stories, position of windows, cornices and gutters, and methods of connecting sills to joists.

A number of examples are shown in Fig. 4 that will prove useful. One is an oval window with keys. This is often employed to light vestibules, back stairs or narrow hallways. Another one, without keys, is shown on the lower part of the page. There are three examples of eyebrow dormers shown. These are different in style, and will, of course, require different construction.

The dormer window, shown at the foot of the page,

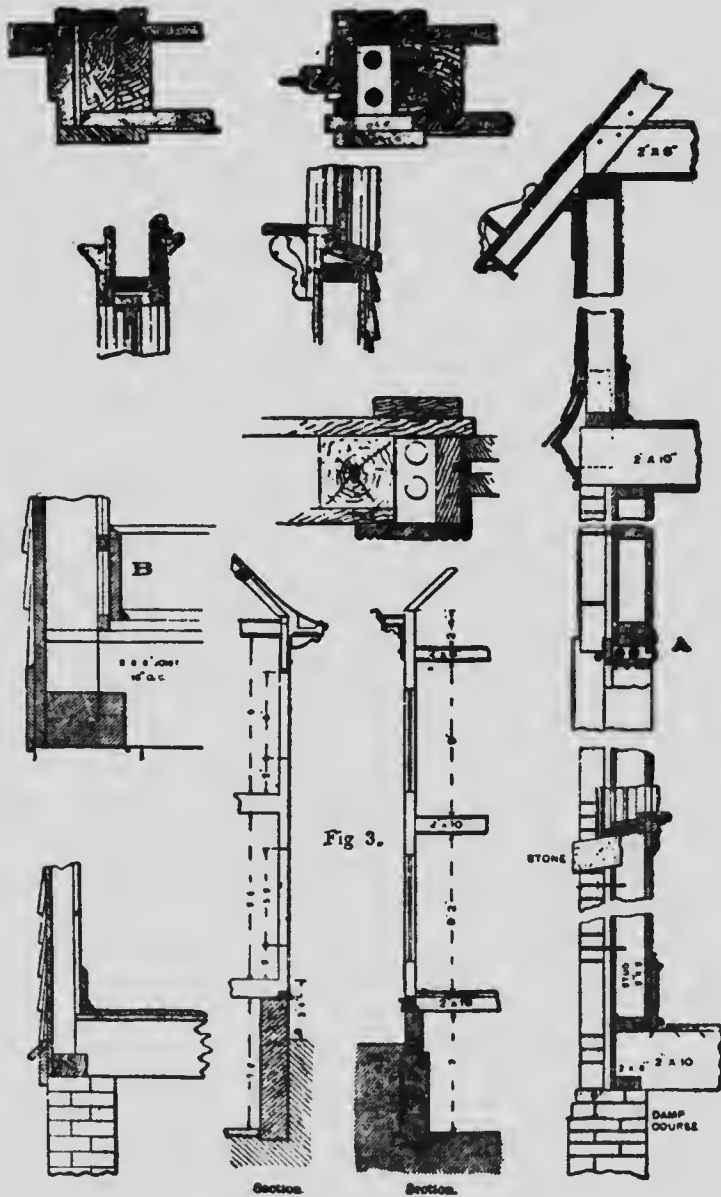

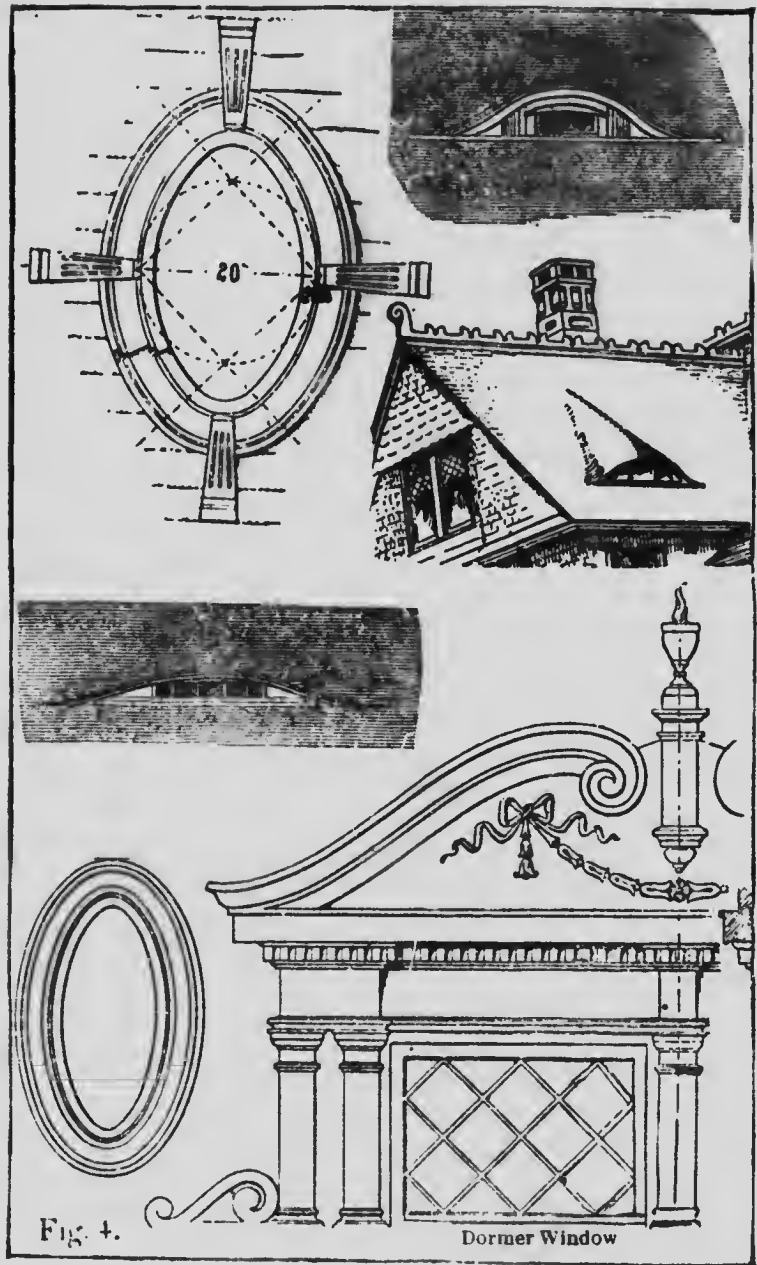


Fig. 4.


Dormer Window

is designed for a house built in colonial style, but may be adapted to other styles.

The four first examples in Fig. 5 show the sections of various parts of a bay window for a balloon frame. The manner of constructing the angle is shown, also the sill and head of window, the various parts and manner of working them being given. A part of the section of the top of the window is shown at E, the inside finish being purposely left off. At F is shown an angle of greater length, which is sometimes the case in bay windows. The manner of construction is quite simple. The lower portion of the page shows some fine examples of turned and carved work. These will often be found useful in giving ideas for turned work for a variety of purposes.

Six examples of shingling are shown in Fig. 6. The first sketch, A, is intended for a hip, and is a fairly good example, and if well done will insure a water-tight roof at that point. In laying out the shingles for this plan the courses are managed as follows: No. 1 is laid all the way out to the line of the hip, the edge of the shingle being planed off, so that course No. 2, on the adjacent side will line perfectly tight down upon it. Next No. 3 is laid and is dressed down in the same manner as the first, after which No. 4 is brought along the same as No. 2. The work proceeds in this manner, first right and then left.

In the second sketch, B, the shingles are laid on the hip in a way to bring the grain of the shingles more nearly parallel with the line of the hip. This method overcomes the projection of cross-grained points. Another method of shingling hips is shown at C and D. In putting on shingles by this method a line is snapped four inches from angle of hip on both sides

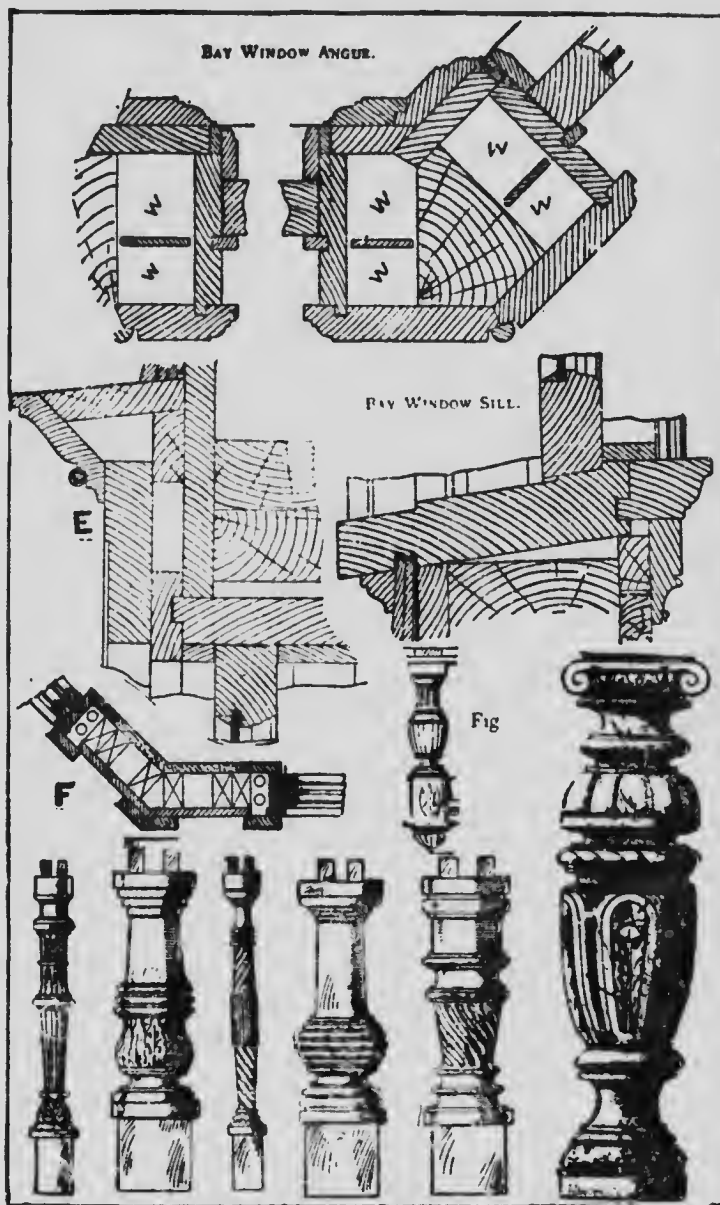




of the ridge, as indicated by the dotted lines in C, then bring the corner of the shingles of each course to the line as shown. When all through with the plain shingling, make a pattern to suit, and only cut the top to shape, as the bottoms or butts will break joints every time, and the hip line will lay square with the hip line, as shown at D; thus making a first-class water-tight job, and one on which the shingles will not curl up, and it will have a good appearance as well.

At E a method is shown for shingling a valley, where no tin or metal is employed. The manner of doing this work is as follows: First take a strip 4 inches wide and chamfer it on the edges on the outside, so that it will lay down smooth to the sheeting, and nail it into the valley. Take a shingle about 4 inches wide to start with and lay lengthwise of the valley, fitting the shingle on each side. The first course, which is always double, would then start with the narrow shingle, marked B, and carried up the valley, as shown in the sketch. Half way between each course lay a shingle, A, about 4 or 5 inches wide, as the case requires, chamfering underneath on each side, so that the next course will lie smooth over it.

If tin or zinc can be obtained, it is better it should be laid in the valley, whether this method be adopted or not.

The sketch shown at F is intended to illustrate the manner in which a valley should be laid with tin, zinc or galvanized iron. The dotted lines show the width of the metal, which should never be less than fourteen inches to insure a tight roof. The shingles should lap over as shown, and not less than four inches of the valley, H, should be clear of shingles

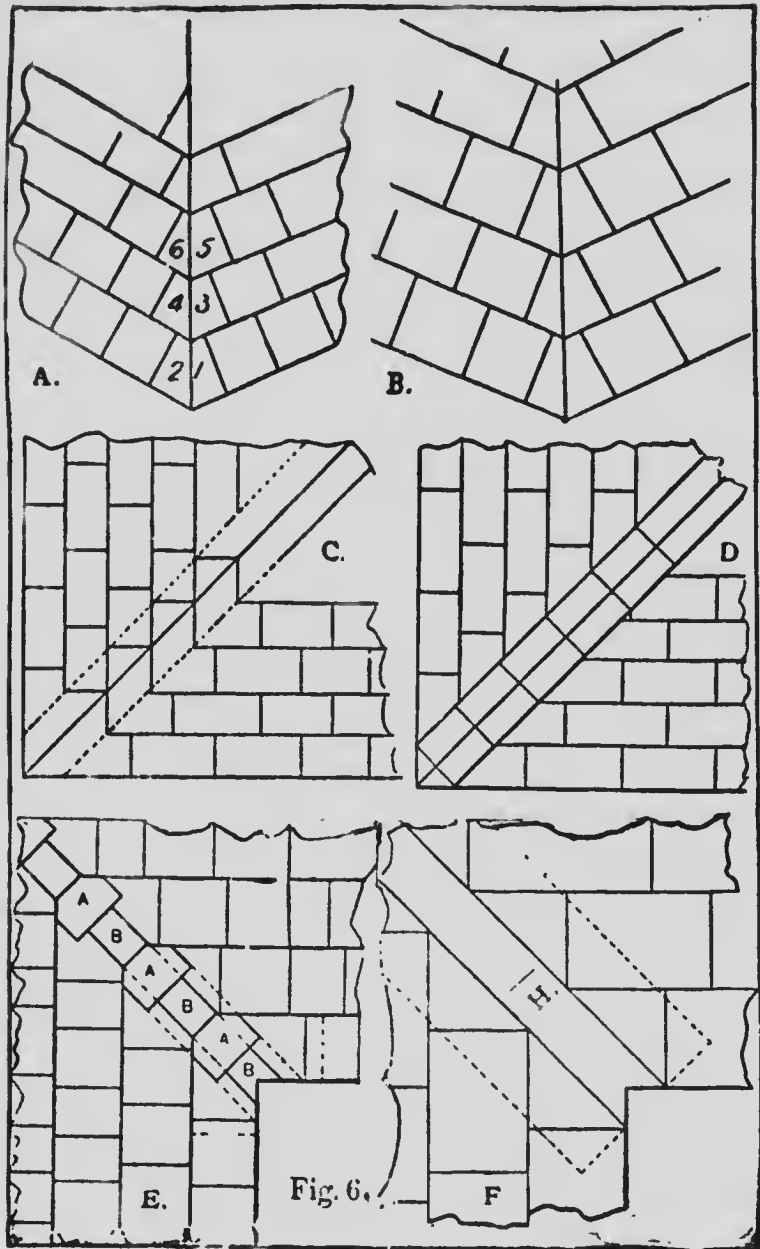


in order to insure plenty of space for the water to flow during a heavy rain storm. A great deal of care should be taken in shingling and finishing a valley, as it is always a weak spot in the roof.



# MICROCOPY RESOLUTION TEST CHART

(ANSI and ISO TEST CHART No. 2)

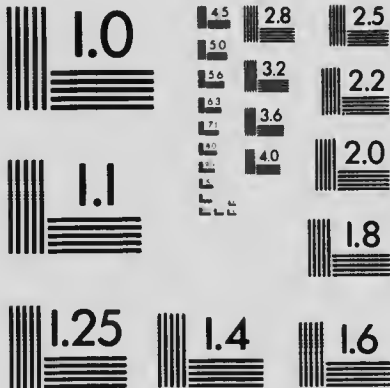

**APPLIED IMAGE Inc**

1653 East Main Street  
Rochester, New York 14609 USA  
(716) 482 - 0300 - Phone  
(716) 288 - 5989 - Fax



## PART IV

### USEFUL TABLES AND MEMORANDA FOR BUILDERS

Table showing quantity of material in every four  
linear feet of exterior wall in a balloon frame build-  
ing, height of wall being given:

Length of Studs.	Size of Sills.	Size of Studs, Braces, etc.	Quantity of Rough Lumber	Quantity of Inch Boarding.	Siding in sup. feet	Tar Paper in sup. feet.
8	6x 6	2x4 studs.	42	36	40	74
10	6x 8	4x4 braces.	52	44	50	80
12	6x10	4x4 plates.	62	53	60	96
14	6x10	1x6 ribbons.	69	62	70	112
16	8x10		82	71	80	128
18	8x10	studs.	87	80	90	144
20	8x12	16 inches from	93	83	100	160
22	9x12	centers.	109	97	110	176
24	10x12		119	106	120	192
18	10x10	2x6 studs.	122	80	90	144
20	10x12	6x6 braces.	137	88	100	160
22	10x12	4x6 plates.	145	97	110	176
24	12x12	1x6 ribbons.	162	106	120	192
26	10x14		169	114	130	203
28	10x14	studs 16 inch centers.	176	123	140	224
30	12x14		198	132	150	240

Table showing amount of lumber in rafters, collar-piece and boarding, and number of shingles to four lineal feet of roof, measured from eave to eave over ridge. Rafters 16-in.ch centers:

Width of House, Feet.	Size of Rafters.	Size of Collar-piece.	Quantity of Lumber in Rafter and Collar-piece.	Quantity of Boarding, Feet.	No. of Shingles.
14	2x4	2x4	39	61	560
16	2x4	2x4	45	70	640
18	2x4	2x4	50	79	720
20	2x4	2x4	56	88	800
22	2x4	2x4	62	97	880
24	2x4	2x4	67	106	960
26	2x6	2x6	84	88	800
28	2x6	2x6	92	97	880
30	2x6	2x6	101	106	960
			109	115	1040
			117	124	1120
			126	133	1200

A proper allowance for waste is included in the above. Roof, one-fourth pitch.

Table showing the requisite sizes of girders and joists for warehouses, the span and distance apart being given:

Distance apart.	SPAN OF GIRDERS.				Joists.	Remarks.
	6 Feet.	8 Feet.	10 Feet.	12 Feet.		
Feet.	Inches.	Inches.	Inches.	Inches.	Inches.	
10	8x12	12x13	12x16	14x18	2½x10	Girders to have a bearing at each end and joists 6 in.
12	9x12	12x14	12x18	16x18	3x10	
14	10x12	12x15	14x18	.....	3x12	



## USEFUL TABLES

181

Table as before, adapted for churches, public halls,  
etc.

Distance Apart.	SPAN OF GIRDERS.				Joists.	Remarks.
	6 Feet.	8 Feet.	10 Feet.	12 Feet.		
Feet.	Inches.	Inches.	Inches.	Inches.	Inches.	
12	6x10	8x12	12x14	12x16	2 x 8	Bearings of girders and joists as above.
13	9x11	9x12	11x15	12x17	2 x 9	
14	6x12	10x12	12x15	11x18	2 x 9	
15	7x12	11x12	11x16	12x16	2 x 10	
16	8x12	12x12	12x16	13x18	2 x 10	
17	8x12	9x14	12x17	14x18	2 x 12	
18	9x12	10x14	11x18	.....	2 x 12	
19	9x12	11x14	12x18	.....	2½ x 12	
20	10x12	12x14	13x18	.....	2½ x 12	
21	10x12	11x15	14x18	.....	2½ x 12	
22	11x12	12x15	.....	.....	3 x 12	Both tables are calcu- lated for yel- low pine.
23	11x12	11x16	.....	.....	3 x 12	
24	10x13	12x16	.....	.....	3 x 13	
25	10x13	12x17	.....	.....	3 x 13	
26	10x14	12x18	.....	.....	3 x 14	
27	10x14	12x18	.....	.....	3 x 14	

Table showing quantity of lumber in every four  
lineal feet of partition, studs being placed 16 centers,  
waste included:

Height of Partition, Feet.	Quantity of Studs 2x4 Feet.	If 2x6 Feet.
8	20	30
9	23	34
10	26	38
11	29	42
12	32	46
13	35	51
14	38	55
15	41	59
16	44	64

Lumber Measurement Table

Length.		Length.		Length.		Length.		Length.		Length.	
2x4		2x6		2x8		2x10		3x6		3x8	
12	8	12	12	12	16	12	20	12	18	12	24
14	9	14	14	14	19	14	23	14	21	14	28
16	11	16	16	16	21	16	27	16	24	16	32
18	12	18	18	18	24	18	30	18	27	18	36
20	13	20	20	20	27	20	33	20	30	20	40
22	15	22	22	22	29	22	37	22	33	22	44
24	16	24	24	24	32	24	40	24	36	24	48
26	17	26	26	26	35	26	43	26	39	26	52
3x10		3x12		4x4		4x6		4x8		6x6	
12	30	12	36	12	16	12	24	12	32	12	36
14	35	14	42	14	19	14	28	14	37	14	42
16	40	16	48	16	21	16	32	16	43	16	48
18	45	18	54	18	24	18	36	18	48	18	54
20	50	20	60	20	27	20	40	20	53	20	60
22	55	22	66	22	29	22	44	22	59	22	66
24	60	24	72	24	32	24	48	24	64	24	72
26	65	26	78	26	35	26	52	26	69	26	78
6x8		8x8		8x10		10x10		10x12		12x12	
12	48	12	64	12	80	12	100	12	120	12	144
14	56	14	75	14	93	14	117	14	140	14	168
16	64	16	85	16	107	16	133	16	160	16	192
18	72	18	96	18	120	18	150	18	180	18	216
20	80	20	107	20	133	20	167	20	200	20	240
22	88	22	117	22	147	22	183	22	220	22	264
24	96	24	128	24	160	24	200	24	240	24	288
26	104	26	139	26	173	26	217	26	260	26	312

## Strength of Materials

Resistance to extension and compression, in pounds per square inch section of some materials.

Name of the Material.	Resistance to Extension.	Resistance to Compression	Tensile Strength in Practice.	Comp. Strength in Practice
White pine...	10,000	6,000	2,000	1,200
White oak....	15,000	7,500	3,000	1,500
Rock elm.....	16,000	8,000	3,200	1,600
Wrought iron	60,000	50,000	12,000	10,000
Cast iron.....	20,000	100,000	4,000	20,000

In practice, from one-fifth to one-sixth of the strength is all that should be depended upon

Table of Superficial or Flat Measure

By which the contents in *Superficial Feet*, of Boards, Plank, Paving, etc., of any *Length* and *Breadth*, can be obtained, by multiplying the decimal expressed in the table by the length of the board, etc.

Breadth Inches.	Area of a lin- eal foot.	Breadth inches.	Area of a lin- eal foot.	Breadth inches.	Area of a lin- eal foot.	Breadth inches.	Area of a lin- eal foot.
1/4	.0208	3 1/4	.2708	6 1/4	.5208	9 1/4	.7708
1/2	.0417	3 1/2	.2916	6 1/2	.5416	9 1/2	.7917
3/4	.0625	3 3/4	.3125	6 3/4	.5625	9 3/4	.8125
1	.0834	4	.3334	7	.5833	10	.8334
1 1/4	.1042	4 1/4	.3542	7 1/4	.6042	10 1/4	.8542
1 1/2	.125	4 1/2	.375	7 1/2	.625	10 1/2	.875
1 3/4	.1459	4 3/4	.3958	7 3/4	.6458	10 3/4	.8959
2	.1667	5	.4167	8	.6667	11	.9167
2 1/4	.1875	5 1/4	.4375	8 1/4	.6875	11 1/4	.9375
2 1/2	.2084	5 1/2	.4583	8 1/2	.7084	11 1/2	.9584
2 3/4	.2292	5 3/4	.4792	8 3/4	.7292	11 3/4	.9792
3	.25	6	.5	9	.75	12	1.0

Round and Equal-Sided Timber Measure

Table for ascertaining the number of Cubical Feet, or solid contents, in a Stick of Round or Equal-Sided Timber, Tree, etc.

1/4 girt in in.	Area in feet.	1/4 girt in in.	Area in feet.	1/4 girt in in.	Area in feet.	1/4 girt in in.	Area in feet.	1/4 girt in in.	Area in feet.
6	.25	10 3/4	.803	15 1/2	1.668	20 1/4	2.898	25	4.34
6 1/4	.272	11	.84	15 3/4	1.722	20 1/2	2.917	25 1/4	4.428
6 1/2	.294	11 1/4	.878	16	1.777	20 3/4	2.99	25 1/2	4.516
6 3/4	.317	11 1/2	.918	16 1/4	1.833	21	3.062	25 3/4	4.605
7	.34	11 3/4	.959	16 1/2	1.89	21 1/4	3.13	26	4.694
7 1/4	.364	12	1.	16 3/4	1.948	21 1/2	3.209	26 1/4	4.785
7 1/2	.39	12 1/4	1.042	17	2.006	21 3/4	3.285	26 1/2	4.876
7 3/4	.417	12 1/2	1.085	17 1/4	2.066	22	3.362	26 3/4	4.969
8	.444	12 3/4	1.129	17 1/2	2.126	22 1/4	3.438	27	5.062
8 1/4	.472	13	1.174	17 3/4	2.187	22 1/2	3.516	27 1/4	5.158
8 1/2	.501	13 1/4	1.219	18	2.25	22 3/4	3.598	27 1/2	5.252
8 3/4	.531	13 1/2	1.265	18 1/4	2.313	23	3.673	27 3/4	5.348
9	.562	13 3/4	1.313	18 1/2	2.376	23 1/4	3.754	28	5.444
9 1/4	.594	14	1.361	18 3/4	2.442	23 1/2	3.835	28 1/4	5.542
9 1/2	.626	14 1/4	1.41	19	2.506	23 3/4	3.917	28 1/2	5.64
9 3/4	.659	14 1/2	1.46	19 1/4	2.574	24	4.	28 3/4	5.74
10	.694	14 3/4	1.511	19 1/2	2.64	24 1/4	4.084	29	5.84
10 1/4	.73	15	1.562	19 3/4	2.709	24 1/2	4.168	29 1/4	5.941
10 1/2	.766	15 1/4	1.615	20	2.777	24 3/4	4.254	29 1/2	6.044

**Shingling**

To find the number of shingles required to cover 100 square feet deduct 3 inches from the length, divide the remainder by 3, the result will be the exposed length of a shingle; multiplying this with the average width of a shingle, the product will be the exposed area. Dividing 14,400, the number of square inches in a square, by the exposed area of a shingle will give the number required to cover 100 square feet of roof.

In estimating the number of shingles required, an allowance should always be made for waste.

Estimates on cost of shingle roofs are usually given per 1,000 shingles.

**Table for Estimating Shingles**

Length of Shingles.	Exposure to Weather, Inches.	No. of Sq. Ft. of Roof Covered by 1000 Shingles.		No. of Shingles Required for 100 Sq. Ft. of Roof.	
		4 In. Wide.	6 In. Wide.	4 In. Wide.	6 In. Wide.
15 in.	4	111	167	900	600
18	5	139	208	720	480
21	6	167	250	600	400
24	7	194	291	514	343
27	8	222	333	450	300

**Siding, Flooring, and Laths**

One-fifth more siding and flooring is needed than the number of square feet of surface to be covered, because of the lap in the siding matching.

1,000 laths will cover 70 yards of surface, and 11 pounds of lath nails will nail them on. Eight bushels of good lime, 16 bushels of sand, and 1 bushel of hair, will make enough good mortar to plaster 100 square yards.

**Excavations**

Excavations are measured by the yard (27 cubic feet) and irregular depths or surfaces are generally averaged in practice.

**Number of Nails Required in Carpentry Work**

- To case and hang one door, 1 pound.  
 To case and hang one window,  $\frac{3}{4}$  pound.  
 Base, 100 lineal feet, 1 pound.  
 To put on rafters, joists, etc., 3 pounds to 1,000 feet.  
 To put up studding, same.  
 To lay a 6-inch pine floor, 15 pounds to 1,000 feet.

**Sizes of Boxes for Different Measures**

A box 24 inches long by 16 inches wide, and 28 inches deep will contain a barrel, or 3 bushels.

A box 24 inches long by 16 inches wide, and 14 inches deep will contain half a barrel.

A box 16 inches square and  $8\frac{1}{2}$  inches deep, will contain 1 bushel.

A box 16 inches by  $8\frac{1}{2}$  inches wide and 8 inches deep, will contain half a bushel.

A box 8 inches by  $8\frac{1}{2}$  inches square and 8 inches deep, will contain 1 peck.

A box 8 inches by 8 inches square and  $4\frac{1}{2}$  inches deep will contain 1 gallon.

A box 8 inches by 4 inches square and  $4\frac{1}{2}$  inches deep, will contain half a gallon.

A box 4 inches by 4 inches square and  $4\frac{1}{2}$  inches deep, will contain 1 quart.

A box 4 feet long, 3 feet 5 inches wide, and 2 feet 8 inches deep, will contain 1 ton of coal.

**Masonry**

Stone masonry is measured by two systems, quarryman's and mason's measurements.

By the quarryman's measurements the actual contents are measured—that is, all openings are taken out and all corners are measured single.

By the mason's measurements, corners and piers are doubled, and no allowance made for openings less than 3' 0" x 5' 0" and only half the amount of openings larger than 3' 0" x 5' 0".

Range work and cut work is measured superficially and in addition to wall measurement.

An average of six bushels of sand and cement per perch of rubble masonry.

Stone walls are measured by the perch ( $24\frac{3}{4}$  cubic feet, or by the cord of 128 feet). Openings less than 3 feet wide are counted solid; over 3 feet deducted, but 18 inches are added to the running measure for each jamb built.

Arches are counted solid from their spring. Corners of buildings are measured twice. Pillars less than 3 feet are counted on 3 sides as lineal, multiplied by fourth side and depth.

It is customary to measure all foundation and dimension stone by the cubic foot. Water tables and base courses by lineal feet. All sills and lintels or ashlar by superficial feet, and no wall less than 18 inches thick.

The height of brick or stone piers should not exceed 12 times their thickness at the base.

Masonry is usually measured by the perch (containing 24.75 cubic feet), but in practice 25 cubic feet are considered a perch of masonry.

Concreting is usually measured by the cubic yard (27 cubic feet).

A cord of stone, 3 bushels of lime and a cubic yard of sand, will lay 100 cubic feet of wall.

Cement, 1 bushel, and sand, 2 bushels, will cover  $3\frac{1}{2}$  square yards 1 inch thick,  $4\frac{1}{2}$  square yards  $\frac{3}{4}$  inch thick, and  $6\frac{3}{4}$  square yards  $\frac{1}{2}$  inch thick; 1 bushel of cement and 1 of sand will cover  $2\frac{1}{4}$  square yards 1 inch thick, 3 square yards  $\frac{3}{4}$  inch thick and  $4\frac{1}{2}$  square yards  $\frac{1}{2}$  inch thick.

**Brick Work**

Brick work is generally measured by 1,000 bricks laid in the wall. In consequence of variations in size of bricks, no rule for volume of laid brick can be exact. The following scale is, however, a fair average:

7 com. bricks to a super. ft. 4 in. wall.						
14	"	"	"	"	"	9 " "
21	"	"	"	"	"	13 " "
28	"	"	"	"	"	18 " "
35	"	"	"	"	"	22 " "

Corners are not measured twice, as in stone work. Openings over 2 feet square are deducted. Arches are counted from the spring. Fancy work counted  $1\frac{1}{2}$  bricks for 1. Pillars are measured on their face only.

A cubic yard of mortar requires 1 cubic yard of sand and 9 bushels of lime, and will fill 30 hods.

One thousand bricks closely stacked occupy about 56 cubic feet.

One thousand old bricks, cleaned and loosely stacked, occupy about 72 cubic feet.

One superficial foot of gauged arches requires 10 bricks.

Pavements, according to size of bricks, take 38 brick on flat and 60 brick on edge per square yard, on an average.

Five courses of brick will lay 1 foot in height on a chimney, 6 bricks in a course will make a flue 4 inches wide and 12 inches long, and 8 bricks in a course will make a flue 8 inches wide and 16 inches long.

### Slating

A square of slate or slating is 100 superficial feet.

In measuring, the width of eaves is allowed at the widest part. Hips, valleys and cuttings are to be measured lineal, and 6 inches extra is allowed.

The thickness of slates required is from  $\frac{3}{8}$  to  $\frac{5}{8}$  of an inch, and their weight varies when lapped from  $\frac{1}{2}$  to  $6\frac{3}{4}$  pounds per square foot.

The "laps" of slates vary from 2 to 4 inches, the standard assumed to be 3 inches.

#### To Compute the Number of Slates of a Given Size Required per Square

Subtract 3 inches from the length of the slate, multiply the remainder by the width and divide by 2. Divide 14,400 by the number so found and the result will be the number of slates required.

Table showing number of slates and pounds of nails required to cover 100 square feet of roof.

Sizes of Slate	Length of Exposure.	No. Required.	Nails Required.
14 in. x 28 in.	12 $\frac{1}{2}$ in.	83	.6 lbs.
12 x 24	10 $\frac{1}{2}$	114	.833
11 x 22	9 $\frac{1}{2}$	138	1.
10 x 20	8 $\frac{1}{2}$	165	1.33
9 x 18	7 $\frac{1}{2}$	214	1.5
8 x 16	6 $\frac{1}{2}$	277	2.
7 x 14	5 $\frac{1}{2}$	377	2.66
6 x 12	4 $\frac{1}{2}$	533	3.8



Approximate Weight of Materials for Roofs

Material.	Average Weight, lb. per Sq. Ft.
Corrugated galvanized iron, No. 20, unboarded.....	2½
Copper, 16 oz. standing seam.....	1½
Felt and asphalt, without sheathing.....	2
Glass, ¼ in. thick.....	1½
Hemlock sheathing, 1 in. thick.....	2
Lead, about ¼ in. thick.....	6 to 8
Lath-and-plaster ceiling (ordinary).....	6 to 8
Mackite, 1 in. thick, with plaster.....	10
Neponset roofing felt, 2 layers.....	½
Spruce sheathing, 1 in. thick.....	2½
Slate, 1½ in. thick, 3 in. double lap.....	6½
Slate, ½ in. thick, 3 in. double lap.....	4½
Shingles, 6 in. x 18 in., ½ to weather.....	2
Skylight of glass, 1½ to ½ in., including frame.....	4 to 10
Slag roof 4-ply.....	4
Terne Plate, IC, without sheathing.....	½
Terne Plate, IX, without sheathing.....	¾
Tiles (plain), 10½ in. x 6½ x ¾ in.—5¼ in. to weather.....	18
Tiles (Spanish) 14½ in. x 10½ in.—7¼ in. to weather..	8½
White-pine sheathing, 1 in. thick.....	2½
Yellow-pine sheathing, 1 in. thick.....	4

Snow and Wind Loads

Data in regard to snow and wind loads are necessary in connection with the design of roof trusses.

Snow Load.—When the slope of a roof is over 12 inches rise per foot of horizontal run, a snow and accidental load of 8 pounds per square foot is ample. When the slope is under 12 inches rise per foot of run, a snow and accidental load of 12 pounds per square foot should be used. The snow load acts vertically, and therefore should be added to the dead load in designing roof trusses. The snow load may be neglected when a high wind pressure has been considered, as a great wind storm would very likely remove all the snow from the roof.

Wind Load.—The wind is considered as blowing in a horizontal direction, but the resulting pressure upon the roof is always taken normal (at right angles) to the slope. The wind pressure against a vertical plane depends on the velocity of the wind, and, as ascertained by the United States Signal Service at Mount Washington, N. H., is as follows:

<i>Velocity.</i> (Mi. per Hr.)	<i>Pressure.</i> (Lb. per Sq. Ft.)	
10.....	0.4.....	Fresh breeze.
20.....	1.6.....	Stiff breeze.
30.....	3.6.....	Strong wind.
40.....	6.4.....	High wind.
50.....	10.0.....	Storm.
60.....	14.4.....	Violent storm.
80.....	25.6.....	Hurricane.
100.....	40.0.....	Violent hurricane.

The wind pressure upon a cylindrical surface is one-half that upon a flat surface of the same height and width.

Since the wind is considered as traveling in a horizontal direction, it is evident that the more nearly vertical the slope of the roof, the greater will be the pressure, and the more nearly horizontal the slope, the less will be the pressure. The following table gives the pressure exerted upon roofs of different slopes, by a wind pressure of 40 pounds per square foot on a vertical plane, which is equivalent in intensity to a violent hurricane.

## UNITED STATES WEIGHTS AND MEASURES

### Land Measure

1 sq. acre = 10 sq. chains = 100,000 sq. links = 6,272,640 sq. in.  
 1 " " = 160 sq. rods = 4,840 sq. yds. = 43,560 sq. ft.

*Note.*—208.7103 feet square, or 69.5701 yards square, or 220 feet by 198 feet square=1 acre.

**Cubic or Solid Measure**

- 1 cubic yard = 27 cubic feet.
- 1 cubic foot = 1,728 cubic inches.
- 1 cubic foot = 2,200 cylindrical inches.
- 1 cubic foot = 3,300 spherical inches.
- 1 cubic foot = 6,600 conical inches.

**Linear Measure**

- 12 inches (in.)..... = 1 foot .....ft.
- 3 feet..... = 1 yard .....yd.
- 5.5 yards..... = 1 rod.....rd.
- 40 rods..... = 1 furlong .....fur.
- 8 furlongs..... = 1 mile.....mi.

in.	ft.	yd.	rd.	fur.	mi.
36 =	3 =	1			
108 =	16.5 =	5.5 =	1		
7,920 =	660 =	220 =	40 =	1	
63,360 =	5,280 =	1,760 =	320 =	8 =	1

**Square Measure**

- 144 square inches (sq. in.) = 1 square foot ..... sq. ft.
  - 9 square feet..... = 1 square yard ..... sq. yd.
  - 30 $\frac{1}{4}$  square yards..... = 1 square rod.....sq. rd.
  - 160 square rods..... = 1 acre .....A.
  - 640 acres..... = 1 square mile.....sq. mi.
- | Sq. mi. | A.    | Sq. rd.   | Sq. yd.     | Sq. ft.      | Sq. in.       |
|---------|-------|-----------|-------------|--------------|---------------|
| 1 =     | 640 = | 102,400 = | 3,097,600 = | 27,878,400 = | 4,014,489,600 |

**Miscellaneous Measures and Weights**

- 1 perch of stone = 1 ft.  $\times$  1 ft. 6 in.  $\times$  16 ft. 6 in. = 24.75 ft. cubic.
- 1 cord of wood, clay, etc., = 4 ft.  $\times$  4 ft.  $\times$  8 ft. = 128 ft. cubic.
- 1 chaldron = 36 bushels or 57.25 ft. cubic.
- 1 cubic foot of sand, solid, weighs 112 $\frac{1}{2}$  lbs.
- 1 cubic foot of sand, loose, weighs 95 lbs.
- 1 cubic foot of earth, loose, weighs 93 $\frac{3}{4}$  lbs.
- 1 cubic foot of common soil weighs 124 lbs.
- 1 cubic foot of strong soil weighs 127 lbs.
- 1 cubic foot of clay weighs 120 to 135 lbs.
- 1 cubic foot of clay and stone weighs 160 lbs.
- 1 cubic foot of common stone weighs 160 lbs.
- 1 cubic foot of brick weighs 95 to 120 lbs.
- 1 cubic foot of granite weighs 160 to 180 lbs.
- 1 cubic foot of marble weighs 166 to 170 lbs.
- 1 cubic yard of sand weighs 3,037 lbs.
- 1 cubic yard of common soil weighs 3,429 lbs.

## Safe Bearing Loads

Brick and Stone Masonry.		Lb. per Sq. In.
<i>Brick Work.</i>		
Bricks, hard, laid in lime mortar.....		100
Hard, laid in Portland cement mortar.....		200
Hard, laid in Rosendale cement mortar.....		150
<i>Masonry.</i>		
Granite, capstone.....		700
Squared stonework.....		350
Sandstone, capstone.....		350
Squared stonework.....		175
Rubble stonework, laid in lime mortar.....		80
Rubble stonework, laid in cement mortar.....		150
Limestone, capstone.....		500
Squared stonework.....		250
Rubble, laid in lime mortar.....		80
Rubble, laid in cement mortar.....		150
Concrete, 1 Portland, 2 sand, 5 broken stone.....		150
Foundation Soils.		Tons per Sq. Ft.
Rock, hardest in native bed.....		100 —
Equal to best ashlar masonry.....		25-40
Equal to best brick.....		15-20
Clay, dry, in thick beds.....		4- 6
Moderately dry, in thick beds.....		2- 4
Soft.....		1- 2
Gravel and coarse sand, well cemented.....		8-10
Sand, compact and well cemented.....		4- 6
Clean, dry.....		2- 4
Quicksand, alluvial soil, etc.....		.5- 1

## Capacity of Cisterns for Each 10 Inches in Depth

Twenty-five feet in diameter holds.....	3059 gallons
Twenty feet in diameter holds.....	1958 gallons
Fifteen feet in diameter holds.....	1101 gallons
Fourteen feet in diameter holds.....	959 gallons
Thirteen feet in diameter holds.....	827 gallons
Twelve feet in diameter holds.....	705 gallons
Eleven feet in diameter holds.....	592 gallons
Ten feet in diameter holds.....	489 gallons
Nine feet in diameter holds.....	396 gallons
Eight feet in diameter holds.....	31 gallons
Seven feet in diameter holds.....	239 gallons
Six and one-half feet in diameter holds.....	206 gallons
Six feet in diameter holds.....	176 gallons
Five feet in diameter holds.....	122 gallons
Four and one-half feet in diameter holds.....	99 gallons

Four feet in diameter holds.....	78 gallons
Three feet in diameter holds.....	44 gallons
Two and one-half feet in diameter holds.....	30 gallons
Two feet in diameter holds.....	19 gallons

Number of Nails and Tacks per Pound

Name.	NAILS. Size.	No. per lb.	Name.	TACKS. Length.	No. per lb.
3 penny, fine	1 1/8 inch	760 nails	1 oz.....	1/8 inch.....	16,000
3	1 1/4	480	1 1/2	3-16	10,666
4	1 1/2	300	2	1/4	8,000
5	1 3/4	200	2 1/2	5-16	6,400
6	2 1/8	160	3	3/8	5,333
7	2 1/4	128	4	7-16	4,000
8	2 1/2	92	6	9-16	2,666
9	2 3/4	72	8	3/8	2,000
10	3	60	10	11-16	1,600
12	3 1/4	44	12	3/4	1,333
16	3 1/2	32	14	13-16	1,143
20	4	24	16	7/8	1,000
30	4 1/4	18	18	15-16	888
40	5	14	20	1	800
50	5 1/2	12	22	1 1-16	727
6	fence 2	80	24	1 1/8	666
8	2 1/2	50			
10	3	34			
12	3 1/4	29			

Wind Pressures on Roofs  
(Pounds per Square Foot.)

Rise, Inches per Foot of Run.	Angle with Horizontal.	Pitch. Proportion of Rise to Span.	Wind Pressure, Normal to Slope.
4	18° 25'	1/4	16.8
6	26° 33'	1/3	23.7
8	33° 41'	2/5	29.1
12	45° 0'	2/3	36.1
16	53° 7'	4/5	38.7
18	56° 20'	3/4	39.3
24	63° 27'	1	40.0

In addition to wind and snow loads upon roofs, the weight of the principals or roof trusses, including the other features of the construction, should be figured in the estimate. For light roofs, having a span of not over 50 feet, and not required to support any ceiling, the weight of the steel construction may be taken at 5 pounds per square foot; for greater spans, 1 pound per square foot should be added for each 10 feet increase in the span.

11

12

13

14

15

16

17

[Faint, illegible text covering the majority of the page]

HOUSE PLAN SUPPLEMENT

PERSPECTIVE VIEWS  
AND FLOOR PLANS

OF

Twenty-Five Low and  
Medium Priced Houses

Full and Complete Working Plans and Specifications of any of these houses will be mailed at the low prices named, on the same day the order is received.

OTHER PLANS

We illustrate in "Modern Carpentry;" "Practical Uses of the Steel Square," Vol. II; and "Common Sense Hand Railing;" 75 other plans, 25 in each book, none of which are duplicates of those we illustrate herein.

For further information, address

THE PUBLISHERS

*Send All Orders for Plans to*

*The*  
RADFORD ARCHITECTURAL  
COMPANY

CHICAGO, ILLINOIS: 192 West 22d Street  
RIVERSIDE, ILLINOIS: Green Block

## 25 HOUSE DESIGNS 25

Without extra cost to our readers, we have added to this volume the perspective view and floor plans of twenty-five low and medium priced houses, such as 90 per cent. of the home builders to-day wish to build. In the drawing of these plans special effort has been made to provide for the most economical construction, thereby giving the home builder and the contractor the benefit of the saving of many dollars, for in no case have we put any useless expense upon the building, simply to carry out some pet idea. Every plan illustrated will show by the complete working plans and specification. But we give you designs that will work out to the best advantage and will give you the most for your money; besides, every bit of space has been utilized to the best advantage.

This supplement, as well as all other books published by this company, has for its foundation the best equipped architectural establishment ever maintained for the purpose of furnishing the public with complete working plans and specifications at the remarkably low price of only \$5.00 per set. Every plan is designed by a licensed architect, who stands at the head of his profession in this particular class of work. The Radford Houses are now being erected in every country of the world where frame houses are built, which bespeaks for our plans more than anything we can say.



### What We Give You

The first question you will ask is, "What do we get in these complete working plans and specifications? Of what do they consist? Are they the cheap, printed plans on tissue paper without details or specifications?"

We do not blame you for wishing to know what you will get for your money. The plans we send out are the regular blue-printed plans drawn one-quarter inch scale to the foot, showing all the elevations, floor plans and necessary interior details. We use the very best quality heavy Gallia Blue Print Paper, number 1000-X, using great care in the blue-printing to have every line and figure perfect and distinct.



## What We Furnish in Blue Prints

### Foundation and Cellar Plan


This sheet shows the shape and size of all walls, piers, footings, posts, etc., and of what materials they are constructed; shows the location of all windows, doors, chimneys, ash pits, partitions and the like. The different wall sections are given, showing their construction and measurements from all the different points.

### Floor Plans

These plans show the shape and size of all rooms, halls, and closets; the location and size of all doors and windows; the position of all plumbing fixtures, gas lights, registers, pantry work, etc., and all the measurements that are necessary are given.

### Elevations

A front, right, left and rear elevation are furnished with all the plans. These drawings are complete and accurate in every respect. They show the shape, size and location of all doors and windows, porches, cornices, towers, bays and the like, and, in fact, give you an exact scale picture of the house as it should be at completion. Full wall sections are given, showing the construction from foundation to roof—the height of stories between the joists, height of plates, pitch of roof, etc.

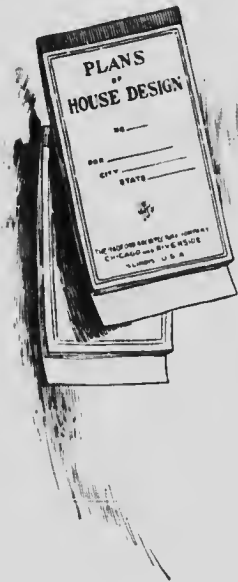

### Roof Plan

This plan is furnished where the roof construction is at all intricate. It shows the location of all hips, valleys, ridges, decks, etc.

All the above drawings are made to scale one-quarter inch to the foot.

### Details

All necessary details of the interior work, such as door and window casings and trim, base, stools, picture moulding, doors, newel posts, balusters, rail, etc., accompany each set of plans. Part is shown in full size, while some of the larger work, such as stair construction, is drawn to a scale of one and one-half inch to the foot.

These blue prints are substantially and artistically bound in cloth and heavy water-proof paper, making a handsome and durable covering and protection for the plans.

## Specifications

The specifications are typewritten on Lakeside Bond Linen Paper and are bound in the same artistic manner as the plans, the same cloth and waterproof paper being used. They consist of from about sixteen to twenty pages of closely typewritten matter, giving full instructions for carrying out the work. All directions necessary are given in the clearest and most explicit manner, so that there can be no possibility of a misunderstanding.



## Basis of Contract

These working plans and specifications can be made the basis of contract between the home builder and the contractor. They will prevent mistakes which cost money, and they will prevent disputes which are unforeseen and never settled satisfactorily to both parties. When no plans are used, the contractor is often obliged to do some work which he did not figure on, and the home builder often does not get as much for his money as he expected, simply because there was no basis on which to work and upon which to base the contract.

No misunderstandings can arise when a set of our plans and specifications are before the contractor and the home builder, showing the interior and exterior construction of the house as agreed upon in the contract. Many advantages may be claimed for the complete working plans and specifications. They are time savers, and therefore money savers. Workingmen will not have to wait for instructions when a set of plans is left on the job. They will prevent mistakes in cutting lumber, in placing door and window frames, and in many other places when the contractor is not on the work and the men have received only partial or indefinite instructions. They also give instructions for the working of all material to the best advantage.



## Free Plans for Insurance Adjustment

You take every precaution to have your house covered by insurance, but do you make any provision for the adjustment of the loss should you have a fire? There is not one man in ten thousand who will provide for this embarrassing situation. You can call to mind instances in your own locality where settlements have been delayed because the insurance companies wanted some proof which could not be furnished.



They demand proof of loss before paying insurance money, and they are entitled to it. We have provided for this and have inaugurated the following plan, which cannot but meet with favor by whoever builds a house from our plans:


Immediately upon receipt of information from you that your house has been destroyed by fire, either totally or partially, we will

forward you, free of cost, a duplicate set of plans and specifications, and in addition we will furnish an affidavit giving the number of the design and date when furnished, to be used for the adjustment of the insurance.

Without one cent of cost to you and without one particle of trouble, we keep a record of the number of the house design and the date it was furnished, so that, in time of loss, all it will be necessary for you to do is to drop us a line and we will furnish the only reliable method of getting a speedy and satisfactory adjustment. This may be the means of saving you hundreds of dollars besides much time and worry.

## Our Liberal Prices

Many have marveled at our ability to furnish such excellent and complete working plans and specifications at such low prices. We do not wonder at this, because we charge but five dollars for a more complete set of working plans and specifications than you would receive if ordered in the regular manner, and when drawn especially for you, at a cost of from fifty to seventy-five dollars. On account of our large business



and unusual equipment, and owing to the fact that we divide the expense

of these plans among so many, it is possible for us to sell them at these low prices. The margin of profit is very close, but it enables us to sell thousands of sets of plans, which save many times their cost to both the owner and the contractor in erecting even the smallest dwelling.

## Our Reliability

Our reliability is beyond question. We have been in the business for many years, having grown from a small institution to our present large capacity, publishing many books and furnishing plans and specifications for many thousands of houses in all parts of the United States, Canada, Europe, Australia, and South Africa. We presume this book may fall into the hands of some one who does not know us; therefore, if you have never heard of us and are not familiar with our reliability and business methods, inquire of your lumber dealer or banker. This article is unnecessary to those who have had previous dealings with us. If you are afraid to send the money direct to us, send it with your order to The Federal Trust and Savings Bank, of Chicago, Ill. (capital and surplus, \$2,500,000), or to the Riverside State Bank of Riverside, Ill., with instructions not to turn it over to us unless they know we are perfectly reliable and will do as we agree.

We have built up our business on these lines. We have merited a continuance of patronage from our customers. We have received the benefit of their words of commendation to their friends. We always do exactly as we agree.

## Our Guarantee

Perhaps there are many who feel that they are running some risk in ordering plans at a distance. We wish to assure our customers that there is no risk whatever. If, upon receipt of plans, you do not find them exactly as we represent them, if you do not find them complete and accurate in every respect, if you do not find them as well prepared as those furnished by any architect in the United States, or any that you have ever seen, we will refund your money upon the return of the plans from you in perfect condition.

All of our plans are prepared by licensed architects standing at the head of their profession, and the standard of their work is the very highest.



We could not afford to make this guarantee if we were not positive that we were furnishing the best plans put out in this country even though our price is not more than one-seventh to one-tenth of the price usually charged.

## Lumber Bill

We do not furnish a Lumber bill. We state this here particularly, as some people have an idea that a Lumber bill should accompany each



set of plans and specifications. In the first place, our plans are gotten up in a very comprehensive manner, so that any carpenter can easily take off the lumber bill without any difficulty. We realize that there are hardly two sections of the country where exactly the same kinds of materials are used, and, moreover, a lumber bill which we might furnish would not be applicable in all sections of the country. We furnish plans and specifications for houses which are built as far north as the Hudson Bay and as far south as the Gulf of Mexico. They are built upon the Atlantic and Pacific coasts, and you can also find them in Australia and South Africa. Each country and section of a country has its peculiarities as to sizes and qualities, therefore it would be useless for us to make a list that would not be universal. Our houses when completed may look the same, whether they are built in Canada or in Florida, but the same materials will not be used, for the reason that the customs of the people and the climatic conditions will dictate the kind and amount of materials to be used in their construction.

## Estimated Cost

It is impossible for any one to estimate the cost of a building and have the figures hold good in all sections of the country. We do not claim to be able to do it. The estimated cost of the houses we illustrate is based on the most favorable conditions in all respects, and does not include plumbing and heating. We do not know your local conditions, and should we claim to know the exact cost of a building in your locality, a child would know that our statement was false. We advise

consultation with your local responsible material dealers and reliable contractors, for they, and they alone, know your local conditions. We wish to be frank with you, and therefore make no statement that we cannot substantiate in every respect. If any plan in this book, or in any other book we publish, pleases you; if the arrangement of the rooms is satisfactory, and if the exterior is pleasing and attractive, then we make this claim—that it can be built as cheaply as if any other architect designed it, and we believe cheaper. We have studied economy in construction, and our knowledge of all the material that goes into the house qualifies us to give you the best for your money. We give you a plan that pleases you, one that is attractive, and one where every foot of space is utilized at the least possible cost. Can any architect do more, even at seven to ten times the price we charge you for plans?

### Reversing Plans

We receive many requests from our patrons for plans exactly according to the designs illustrated, with the one exception of having them reversed or faced in the opposite direction. It is impossible for us to make this change and draw new plans, except at a cost of about eight times our regular prices. We see no reason why our regular plans will not answer your purpose. Your carpenter can face the house exactly as you wish it, and the plans will work out as well facing in one direction as in another. We can, however, if you wish, and so instruct us, make you a reversed blue print and furnish it at our regular price, but in that case all the figures and letters will be reversed, and therefore liable to cause as much confusion as if your carpenter reversed the plan himself while constructing the house. We would advise, however, in all cases where the plan is to be reversed and there is the least doubt about the contractor not being able to work from the plans as we have them, that two sets of blue prints be purchased, one regular and the other reversed, and in such cases we will furnish two sets of blue prints and one set of specifications for only fifty per cent. added to our regular cost, making the \$5.00 plan cost only \$7.50.



### Special Department

We have established a special department under the supervision of a licensed architect, to handle all special plans which our patrons may

like to have drawn. We realize that often some special or original idea is wished carried out, and to provide for this we have our architects and draughtsmen. The price we charge is very reasonable. Should you wish the services of this department, it would be necessary for you to send us as full and complete information as possible, accompanied by a rough sketch illustrating as near as you can your ideas and requirements. Immediately upon receipt of this information from you, we will make you a price on these plans and specifications carrying out your own ideas, and if our price proves to be satisfactory, we will submit pencil sketch subject to your corrections and additions before proceeding to complete the plans. We must, however, have an understanding that we are under contract to do this work, for we cannot afford to do all the preliminary work without some guarantee that it will be accepted after we have agreed to make the plans entirely satisfactory to you. We will, however, make estimate on the cost of any special work, so that you will know exactly what it will cost you before we proceed with the plans.



## How to Send Money

Remittances can be made by Post Office Money Order, Express Money Order, Bank Draft, United States or Canadian Bills. Take great care to write your address plainly, and be sure and write your name and address on the upper left-hand corner of the envelope. In addition, write plainly in your letter your name and address, the name of your city, county and State, if you are a resident of the United States, or if a resident of any other country, the name of the county, district or Province; also the street and number when necessary. We receive a great amount of money which it is impossible for us to trace on account of the incomplete or indistinct writing of name or address, and oftentimes the entire omission of both.



No. 1097

P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1097

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,000 to \$1,300 according to the locality in which it is built.




# FLOOR PLAN OF DESIGN No. 1097

## SIZE

Width, 32 feet.


Length, 42 feet.

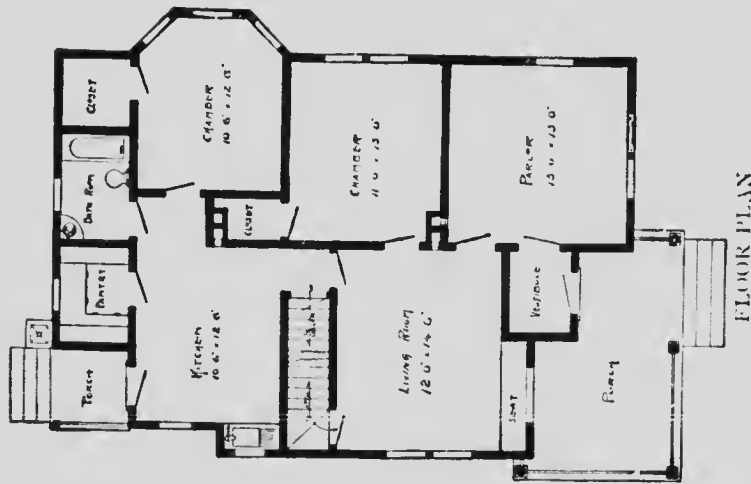

Blue prints consist of cellar and foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about twenty pages of typewritten matter.

No. 1021

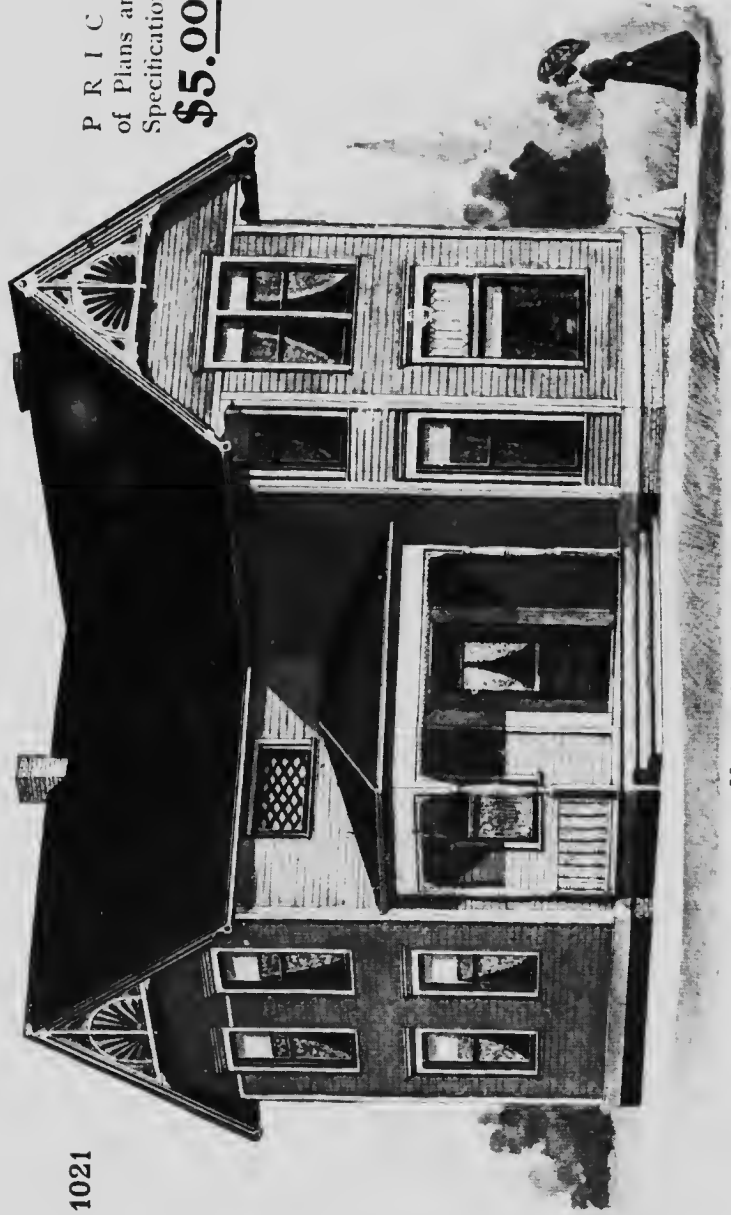


P R I C E  
of Plans and  
Specifications  
**\$5.00**

House Design No. 1021

Full and complete working plans and specifications for this house will be furnished for \$5.00.  
Cost of this house is from \$1,000 to \$1,225, according to the locality in which it is built.


Cost of this house is from \$1,000 to \$1,225, according to the locality in which it is built.

### FLOOR PLANS OF DESIGN No. 1021

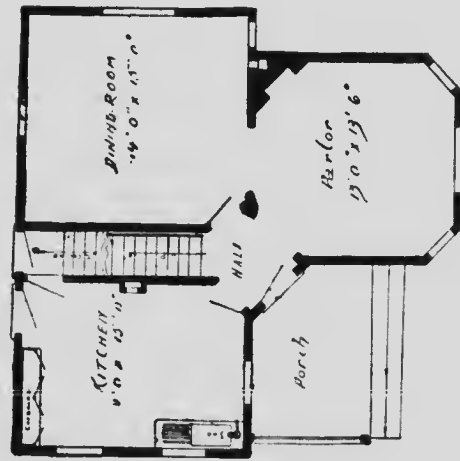

FIRST FLOOR PLAN

SIZE  
Length, 30 feet.  
Width, 30 feet.

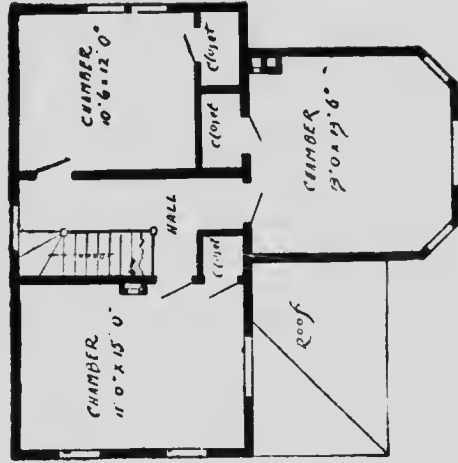

SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of twenty pages of typewritten matter.

No. 1073

P R I C E  
of Plans and  
Specifications  
**\$8.00**



HOUSE DESIGN No. 1073


Full and complete working plans and specifications of this house will be furnished for \$8.00. Cost of this house is from \$2,800 to \$3,100 according to the locality in which it is built.

# FLOOR PLANS OF DESIGN No. 1073


**SIZE**  
 Width, 46 feet.  
 Length, 64 feet,  
 exclusive of porches.

Blue prints consist of  
 cellar and foundation plan;  
 first and second floor plans;  
 front, rear, two side elevations;  
 wall sections and all  
 necessary interior details.

Specifications consist of  
 about twenty pages of type-  
 written matter.

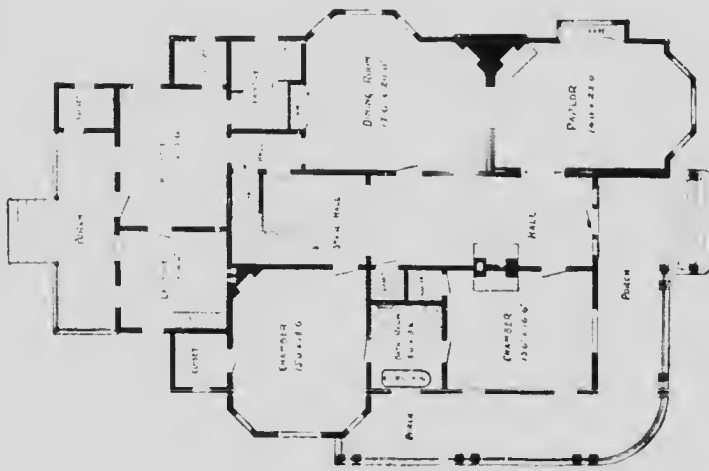

FIRST FLOOR PLAN

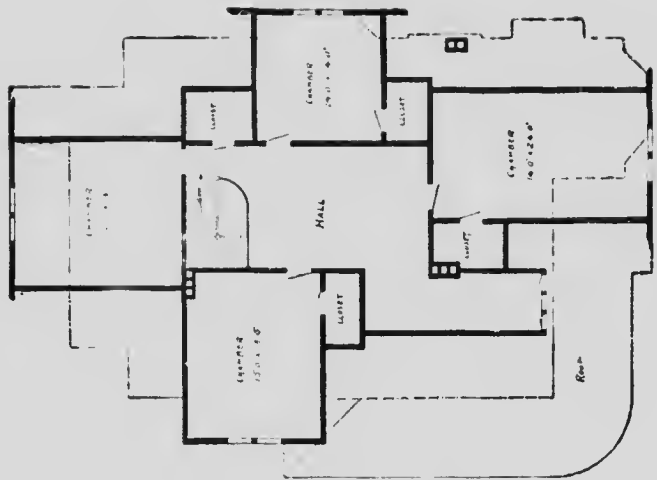

SECOND FLOOR PLAN

No. 1042

P L C E  
of Plans and  
Specifications  
**\$5.00**



*W. N. K. K. K. K. K.*

HOUSE DESIGN No. 1042

Full and complete working plans and specifications for this house will be furnished for \$5.00. Cost of this house is from \$600 to \$750 according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1042

## SIZE

Width, 24 feet.

Length, 32 feet.




17

Blue Prints consist of foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of fifteen pages of • rewritten matter.

No. 1074

P R I C E  
of Plans and  
Specifications  
**\$5.00**

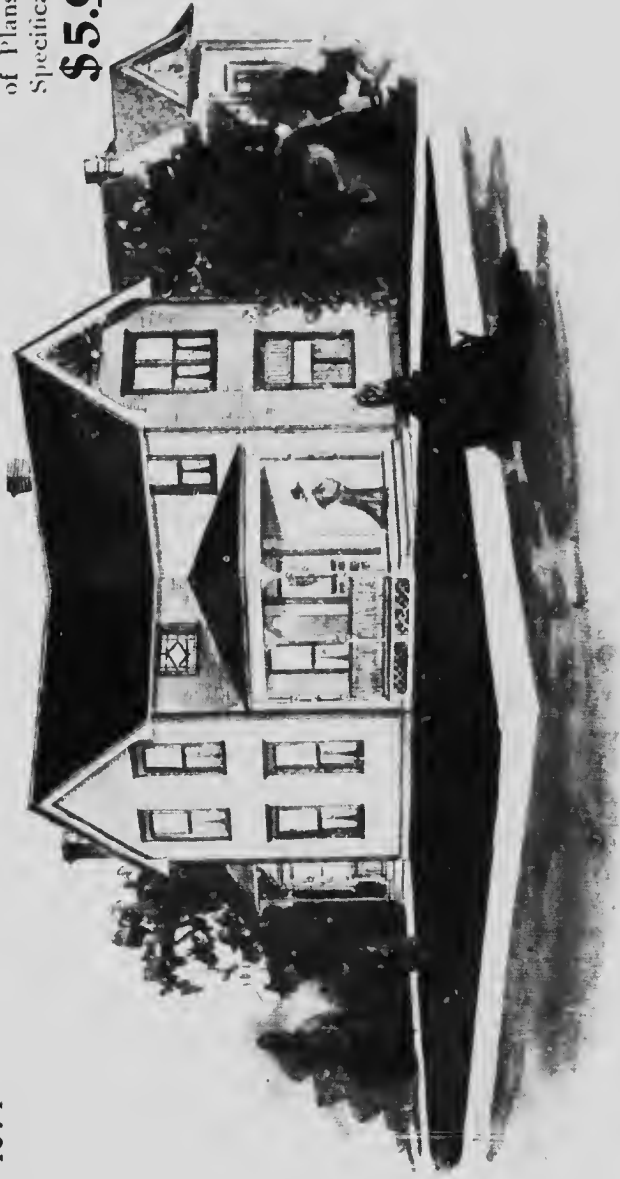

HOUSES No. 1074.


Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$1,000 to \$1,250 according to the locality in which it is built.



COST OF THIS HOUSE IS FROM \$1,000 TO \$1,200, INCLUDING THE NECESSARY


# FLOOR PLANS OF DESIGN No. 1074

SIZE  
Width, 30 feet.  
Length, 44 feet.

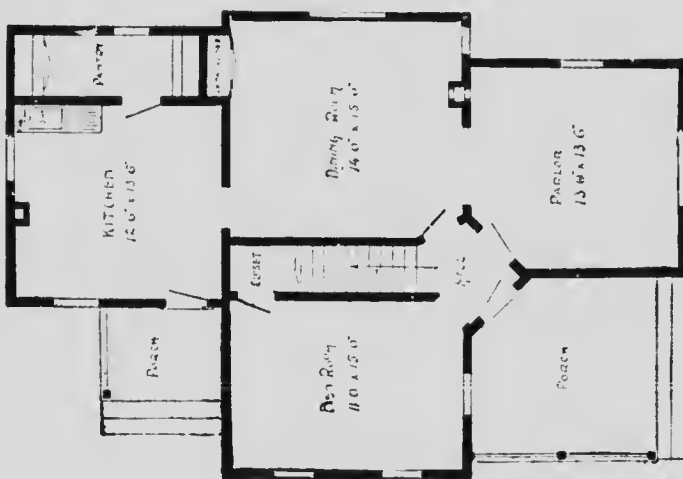

FIRST FLOOR PLAN

Blue prints consist of foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about twenty pages of typewritten matter.

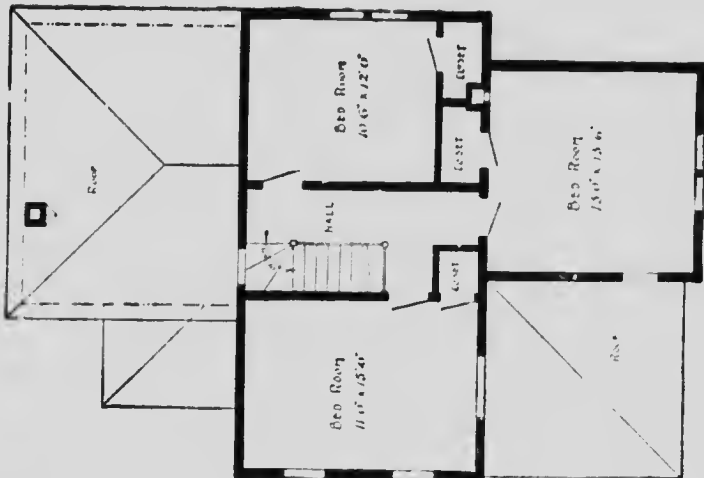

SECOND FLOOR PLAN

No. 1096

P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1096

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,250 to \$1,500 according to the locality in which it is built.


Cost of this house is from \$1,250 to \$1,600 according to the finish in which it is built.

# FLOOR PLAN OF DESIGN No. 1096

## SIZE

Width, 33 feet.

Length, 50 feet.

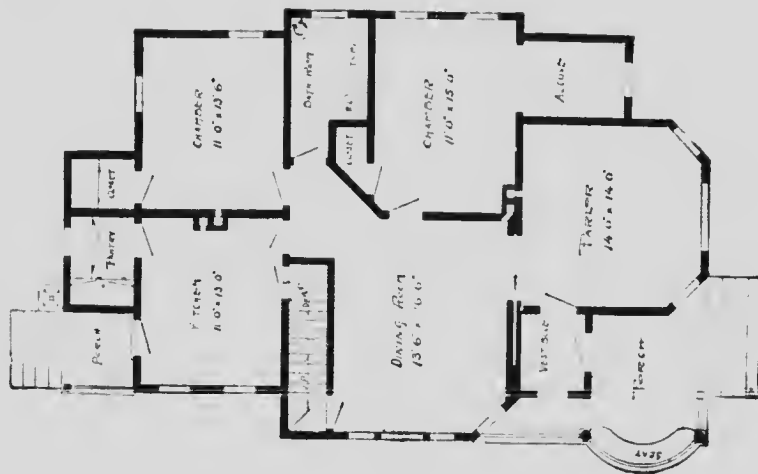

FLOOR PLAN

Blue prints consist of foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

No. 1058


P I C E  
of plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1058

Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$600 to \$800 according to the locality in which it is built.

FLOOR PLANS OF DESIGN No. 1058

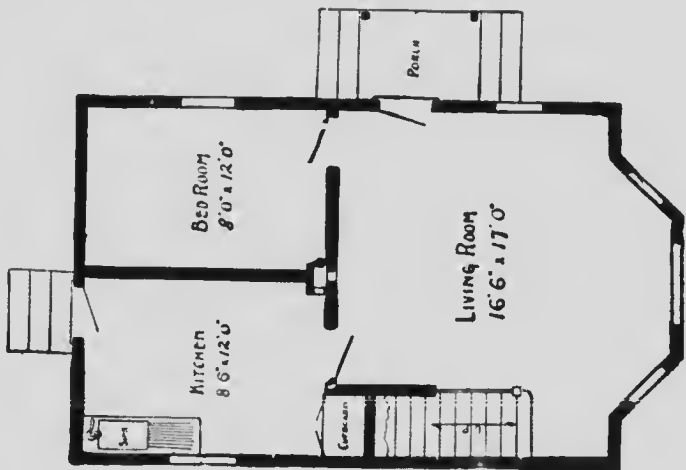


FIRST FLOOR PLAN

Blue prints consist of foundation plan; first and second floor plan; front, rear, two side elevations, wall sections and all necessary interior details. Specifications consist of fifteen pages of typewritten matter.

SIZE

Width, 18 feet.  
Length, 30 feet,  
exclusive of porch.

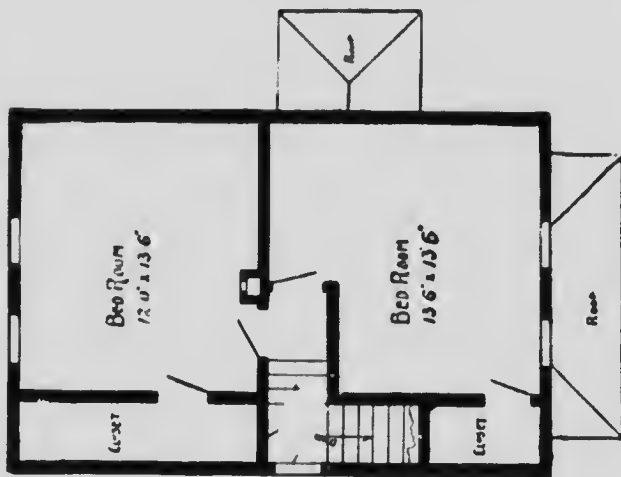

SECOND FLOOR PLAN

No. 1045

P R I C E  
of Plans and  
Specifications  
**\$5.00**




HOUSE DESIGN No. 1045  
Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$1,350 to \$1,500, according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1045

## SIZE

Width, 30 feet.

Length, 46 feet,  
exclusive of porch

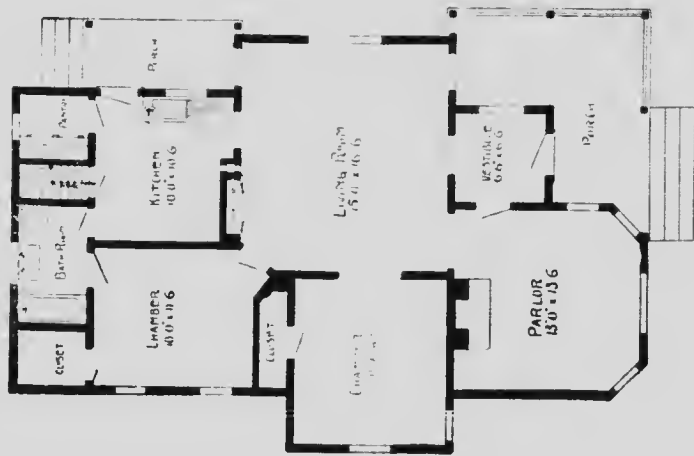


FLOOR PLAN

Blue prints consist of cellar and foundation plan; floor and roof plans; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

No. 1038

P R I C E  
of Plans and  
Specifications  
**\$5.00**

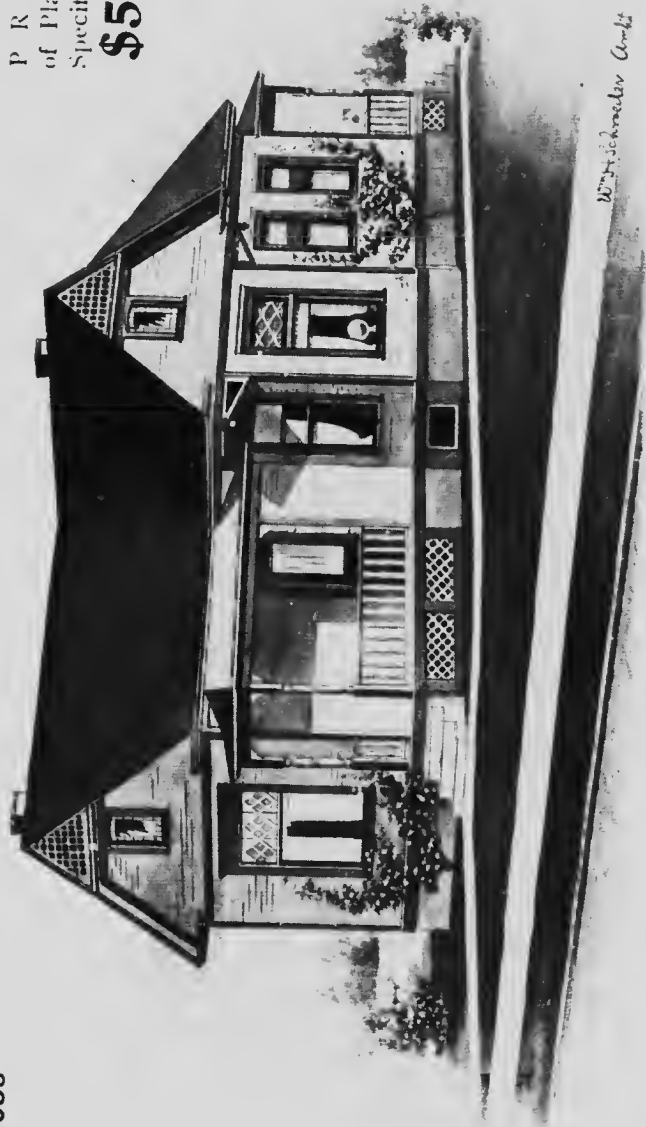


*Wm. J. Schneider Architect*

HOUSE DESIGN No. 1038

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,100 to \$1,350 according to the locality in which it is built.



FLOOR PLAN OF DESIGN No. 1038.

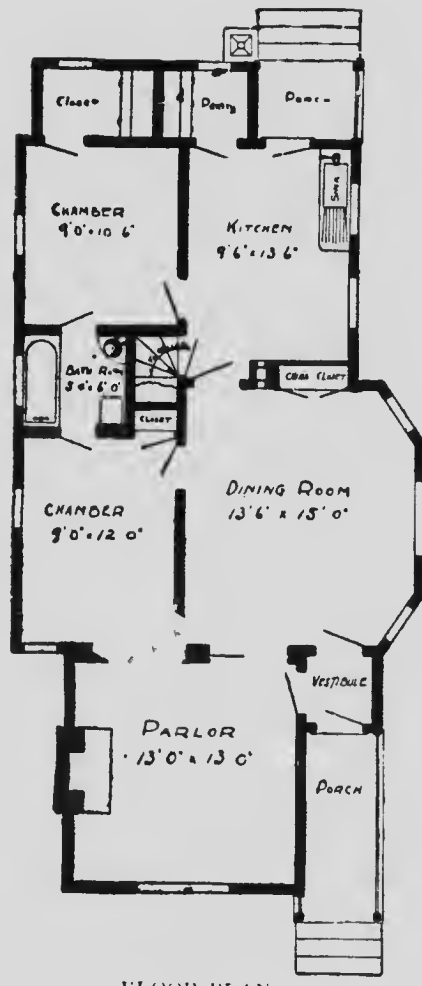

FLOOR PLAN

SIZE

Width, 24 feet. Length, 48 feet, exclusive of porches.

Blue prints consist of cellar and foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about fifteen pages of typewritten matter.

No. 1041

P R I C E  
of Plans and  
Specifications  
**\$ .500**




Horse Design No. 1041


Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$2,250 to \$2,600 according to the locality in which it is built.

# FLOOR PLANS OF DESIGN No. 1041

SIZE  
 Width, 28 feet.  
 Length, 42 feet,  
 exclusive of porches.

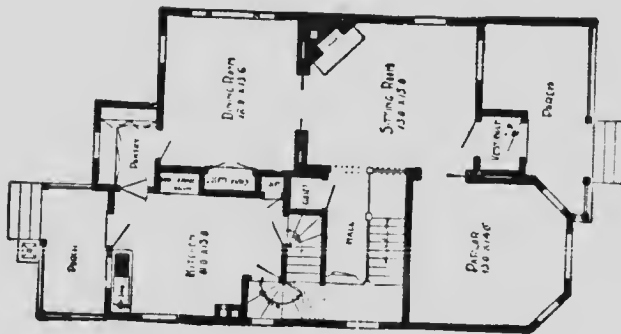

FIRST FLOOR PLAN

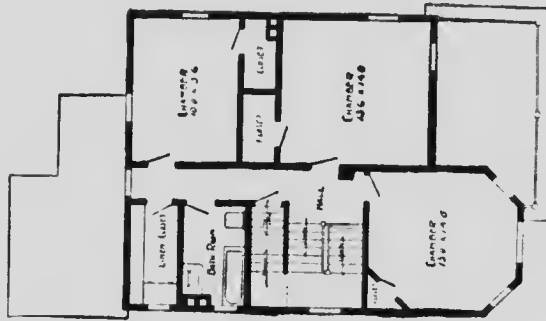

SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plans; first and second floor plans; roof plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of twenty pages of typewritten matter.

**No. 1039**


**P R I C E**  
of Plans and  
Specifications  
**\$5.00**



**House Design No. 1039**


Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$3,650 to \$1,150 according to the locality in which it is built.

FLOOR PLANS OF DESIGN No. 1039

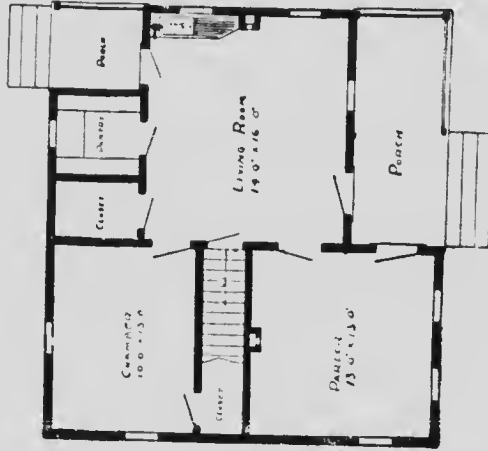

FIRST FLOOR PLAN

SIZE  
Width, 30 feet.  
Length, 28 feet.

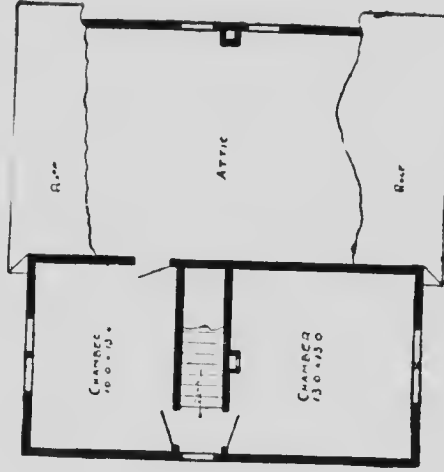

SECOND FLOOR PLAN

Blue prints consist of foundation plan; first and second floor plan; front, rear, two side elevations; wall sections and all necessary interior details.  
Specifications consist of about fifteen pages of typewritten matter.

No. 1040

P R I C E  
of Plans and  
Specifications  
**\$5.00**




Horse Design No. 1040

Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$2,000 to \$2,250 according to the locality in which it is built.


Cost of this house is from \$2,000 to \$2,250 according to the locality in which it is built.

# FLOOR PLANS OF DESIGN No. 1040

SIZE  
Width, 29 feet.  
Length, 40 feet,  
exclusive of porches.

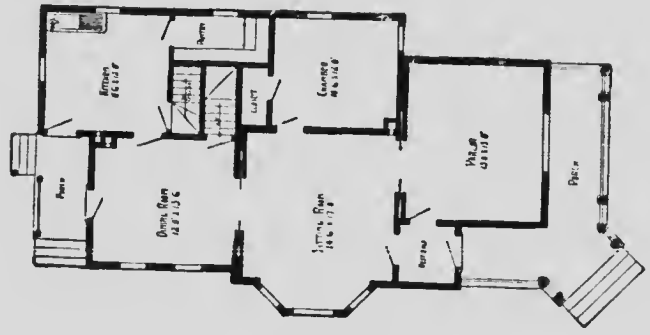

FIRST FLOOR PLAN

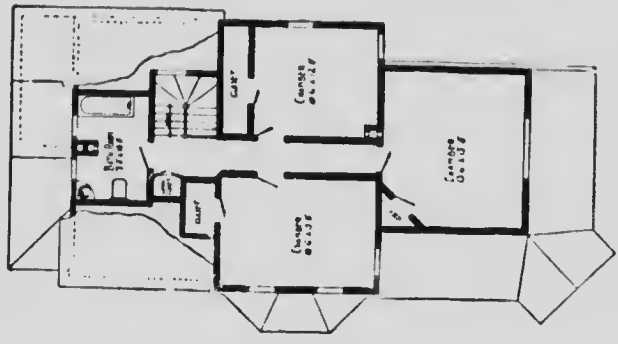

SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plans; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about twenty pages of typewritten matter.

**No. 1034**

**P R I C E**  
of Plans and  
Specifications  
**\$5.00**



**House Design No. 1034**

Full and complete working plans and specifications of this house will be furnished for **\$5.00**.  
Cost of this house is from **\$1,100** to **\$1,375**, according to locality in which it is built.




Cost of this house is from \$1,100 to \$1,375, according to locality in which it is built.

### FLOOR PLANS OF DESIGN No. 1034

#### SIZE


Width, 24 feet.

Length, 41 feet.

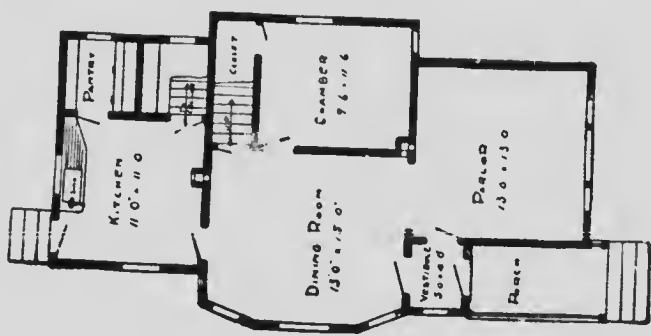

FIRST FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of twenty pages of typewritten matter.

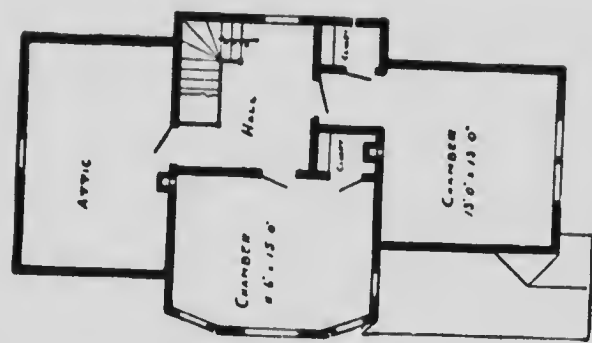

SECOND FLOOR PLAN

No. 1005


P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1005

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$800 to \$1,050 according to the locality in which it is built.

FLOOR PLANS OF DESIGN No. 1005

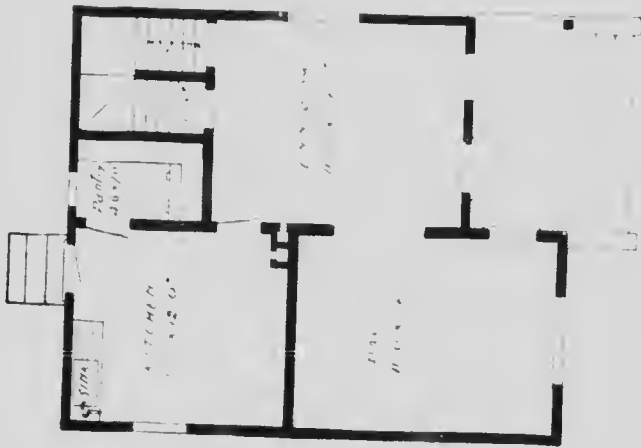

FIRST FLOOR PLAN

S 1 / 1

Width, 24 feet  
Length, 28 feet.



SECOND FLOOR PLAN

Blue prints consist of foundation plan, first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.


No. 1003

P R I C E  
of Plans and  
Specifications  
**\$5.00**




HOUSE DESIGN No. 1003

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$750 to \$900 according to the locality in which it is built.

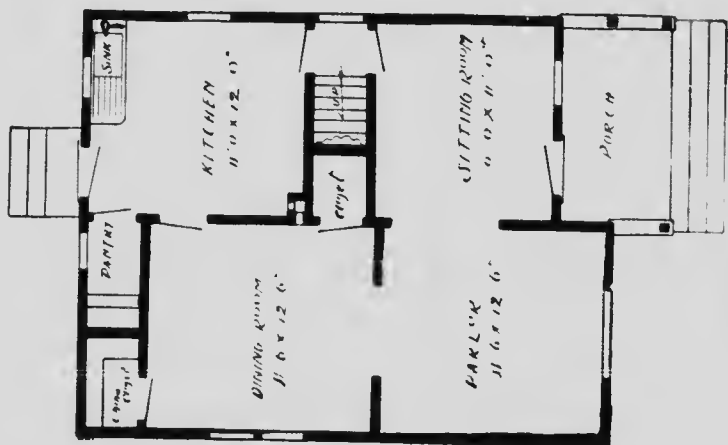

FIRST FLOOR PLAN

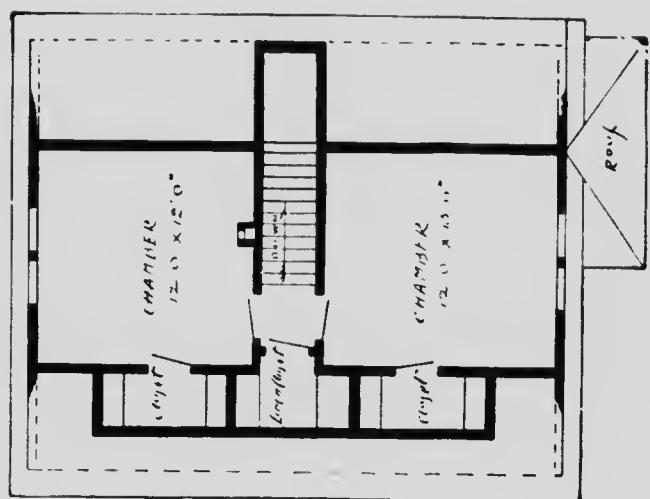

SECOND FLOOR PLAN

FLOOR PLANS OF  
DESIGN No. 1003


SIZE

Width, 24 feet.  
Length, 30 feet,  
exclusive of porches.

Blue prints consist of  
foundation plan, first and  
second floor plans; front,  
rear, two side elevations;  
wall sections and all necessary interior details. Specifications consist  
of about fifteen pages of typewritten matter

No. 1043

P R I C E  
of Plans and  
Specifications  
**\$5.00**

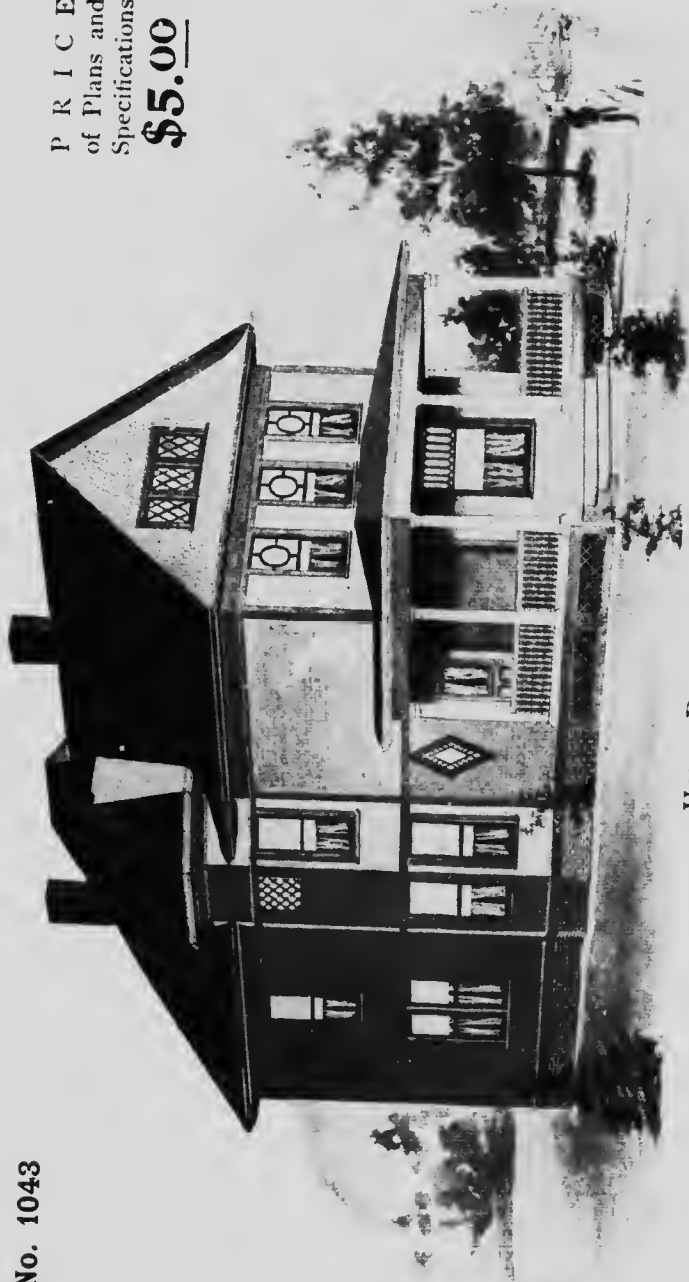

Horse Design No. 1043.

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,950 to \$2,250 according to the locality in which it is built.


# FLOOR PLANS OF DESIGN

No. 1043

## SIZE:

Width, 26 feet.

Length, 44 feet, exclusive of porch.

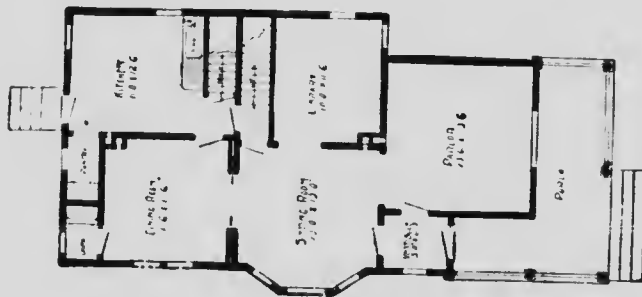

FIRST FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about twenty pages of typewritten matter.



SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about twenty pages of typewritten matter.

**No. 1013**

**P R I C E**  
of Plans and  
Specifications  
**\$5.00**



**HOUSE DESIGN No. 1013**

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,000 to \$1,250, according to locality in which it is built.




# FLOOR PLANS OF DESIGN No. 1013


## SIZE

Width, 24 feet.

Length, 32 feet 6 inches.

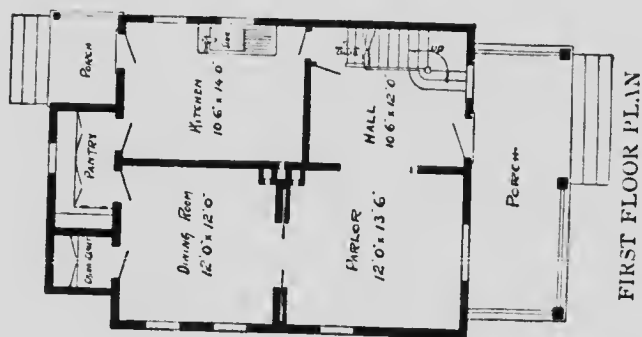

FIRST FLOOR PLAN

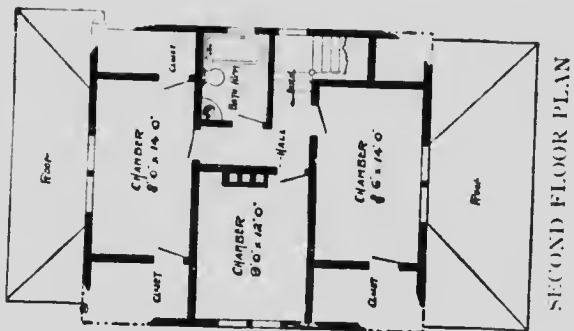

SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.  
 Specifications consist of about twenty pages of typewritten matter.

No. 1001


P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1001

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$1,250 to \$1,500 according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1001

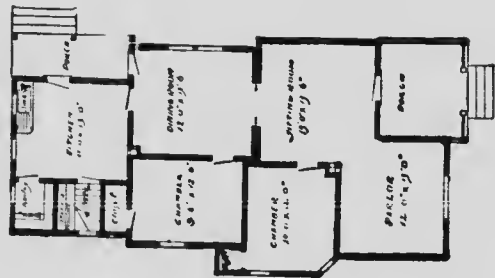

FLOOR PLAN

## SIZE

Width, 27 feet. Length, 50 feet, exclusive of porches.

Blue prints consist of cellar and foundation plan; floor plan; roof plan; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about fifteen pages of typewritten matter.

No. 1051


P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1051

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$700 to \$900 according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1051

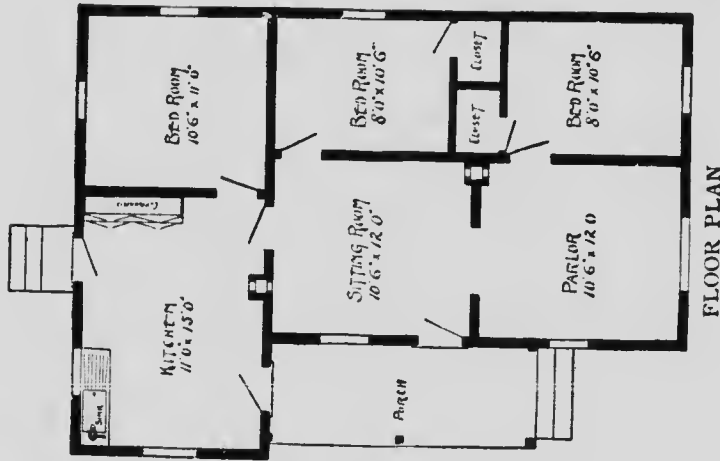


## SIZE

Width, 27 feet. Length, 37 feet.

Blue prints consist of foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

No. 1046

P R I C E  
of Plans and  
Specifications  
**\$5.00**

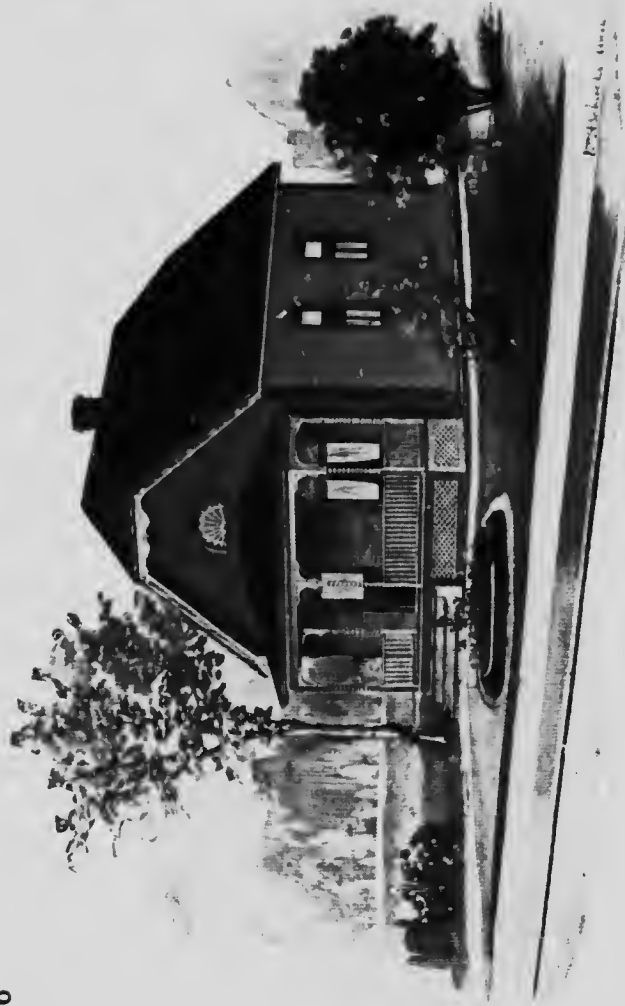


HOUSE DESIGN No. 1046

Full and complete working plans and specifications of this house will be furnished for \$5.00.  
Cost of this house is from \$600 to \$700, according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1046

S1/E

Width, 22 feet. Length, 28 feet, exclusive of porch.

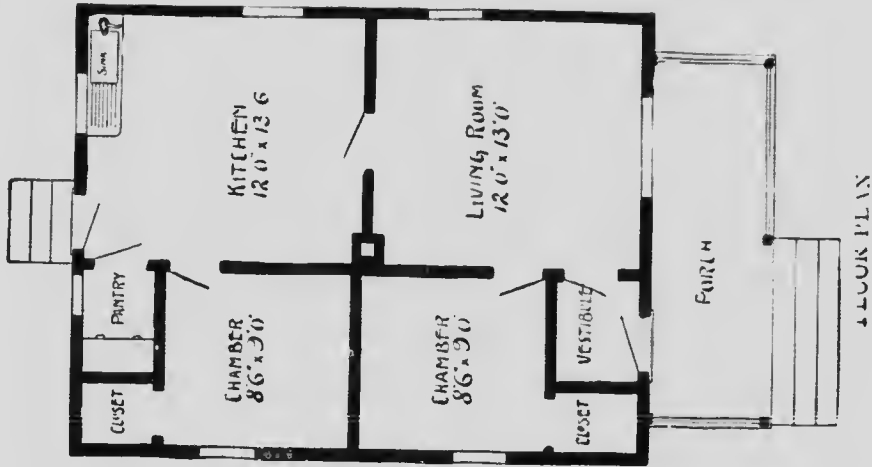

Blue prints consist of foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

No. 1016

P R I C E  
of Plans and  
Specifications  
**\$5.00**




HOUSE DESIGN, No. 1016

Full and complete working plans and specifications of this house will be furnished for **\$5.00**.  
Cost of this house is from \$1,500 to \$1,800 according to the locality in which it is built.



FLOOR PLAN OF DESIGN No. 1016.

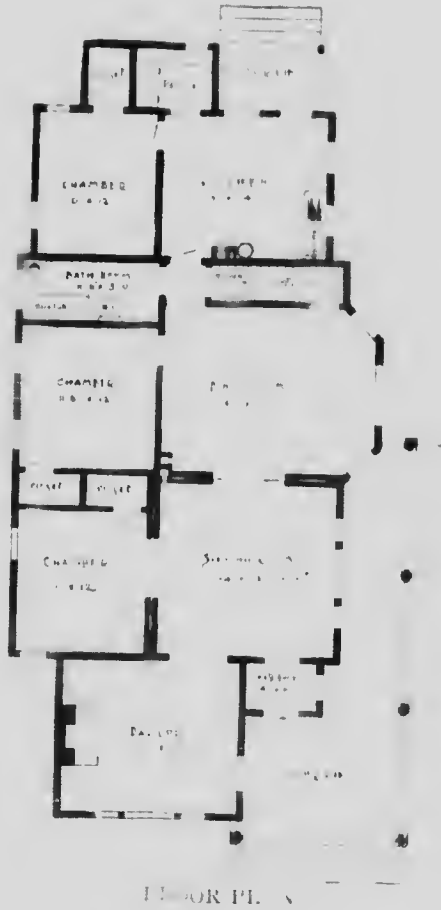

51/21.

Overall length, 60 feet, exclusive of porches.

Blue prints consist of cellar and foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of \_\_\_\_\_ pages of typewritten matter.

No. 1024


P R I C E  
of Plans and  
Specifications  
**\$5.00**



HOUSE DESIGN No. 1024

Full and complete working plans and specifications for this house will be furnished for \$5.00.  
Cost of this house is from \$1,000 to \$1,200, according to the locality in which it is built.

# FLOOR PLAN OF DESIGN No. 1024

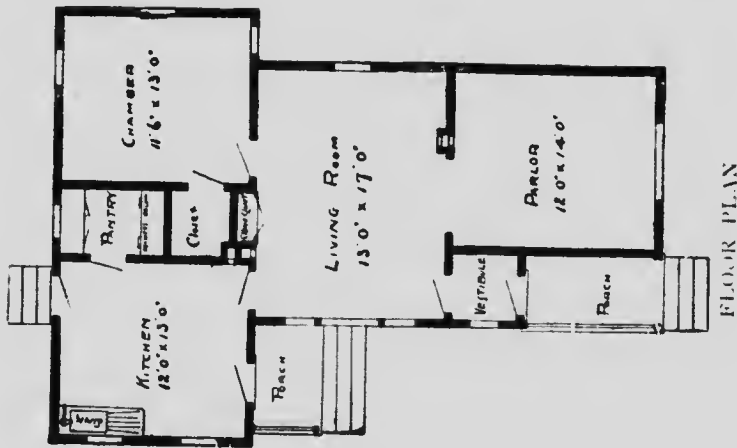

## SIZE


Width, 30 feet. Length, 42 feet.

Blue prints consist of foundation plan; floor plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

FLOOR PLAN

No. 1060


P R I C E  
of Plans and  
Specifications  
**\$12.00**

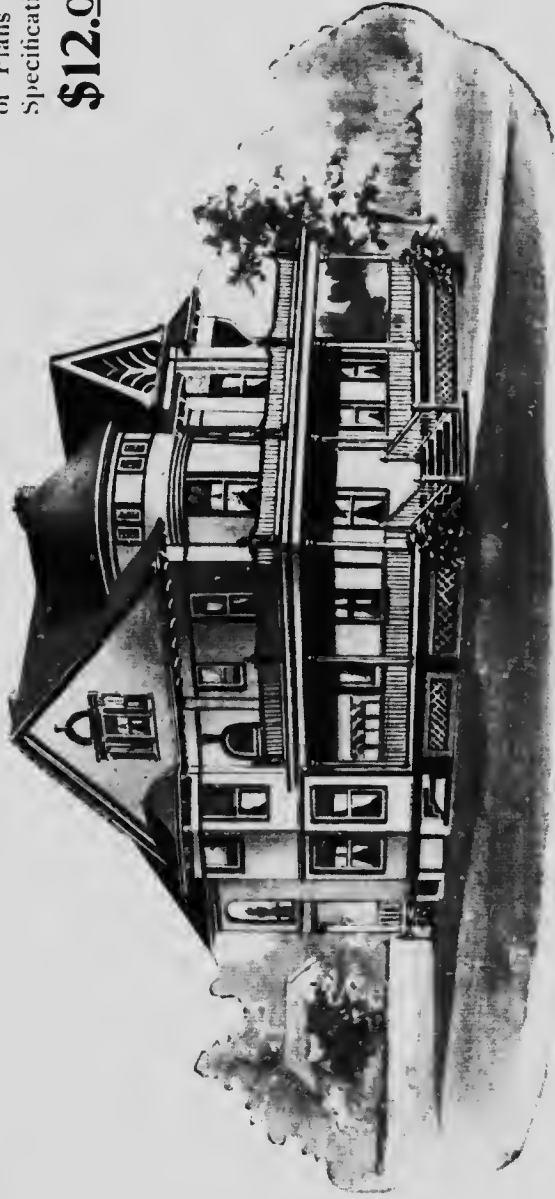

HOUSE DESIGN No. 1060


Full and complete working plans and specifications of this house will be furnished for \$12.00. Cost of this house is from \$4,000 to \$4,250, according to the locality in which it is built.

FLOOR PLANS OF DESIGN No. 1060

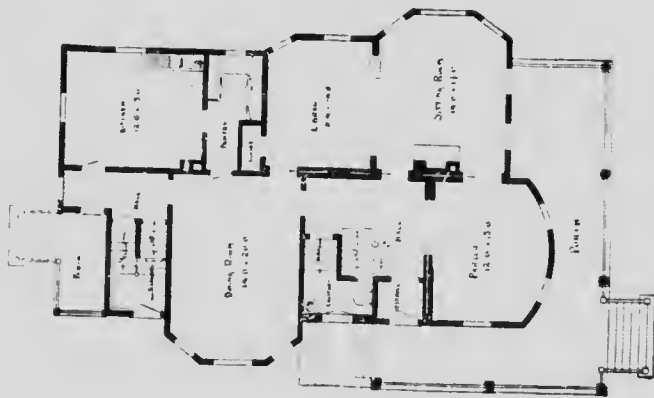

FIRST FLOOR PLAN

SIZE  
 Width, 39 feet.  
 Length, 54 feet,  
 exclusive of porches.

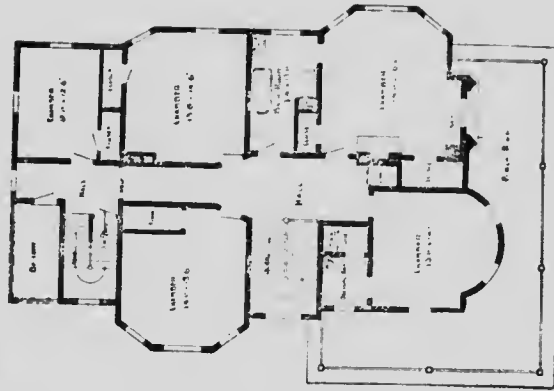


SECOND FLOOR PLAN

Blue prints consist of cellar and foundation plan; first and second floor plans; attic and roof plan; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about twenty pages of typewritten matter.




**FLOOR PLANS OF  
DESIGN No. 1072**

**SIZE**  
Width, 26 feet.  
Length, 42 feet,  
exclusive of porch.

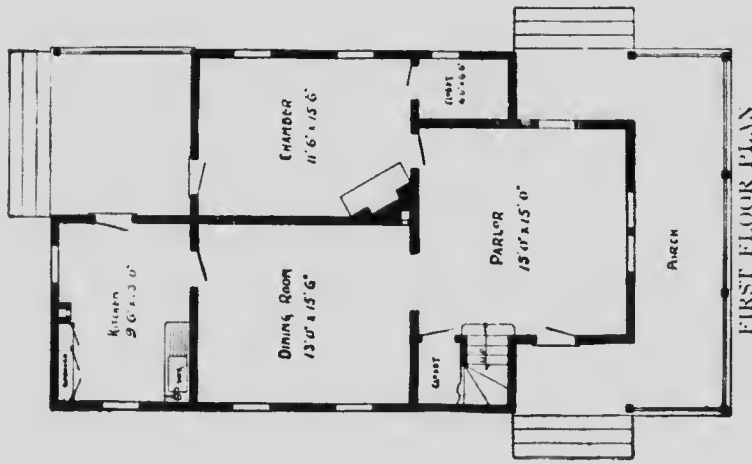

FIRST FLOOR PLAN

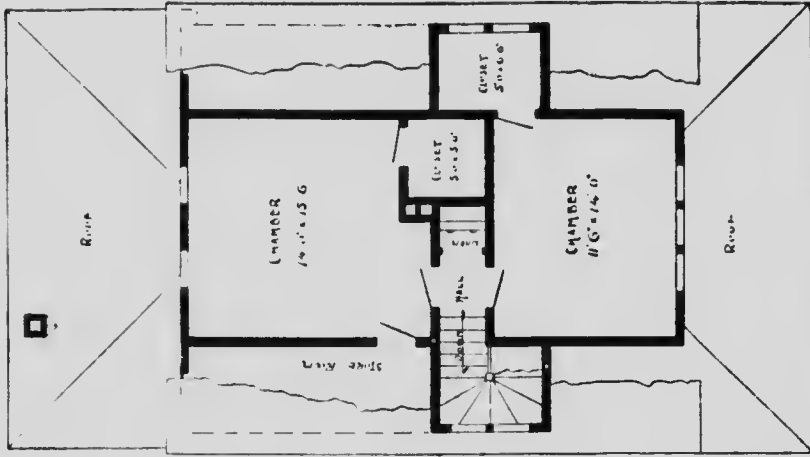

SECOND FLOOR PLAN

Blue prints consist of foundation plan, first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details. Specifications consist of about fifteen pages of typewritten matter.

No. 1088

P R I C E  
of Plans and  
Specifications  
**\$5.00**




HOUSE DESIGN No. 1088

Full and complete working plans and specifications of this house will be furnished for \$5.00. Cost of this house is from \$900 to \$1,250 according to the locality in which it is built.




## FLOOR PLANS OF DESIGN No. 1088

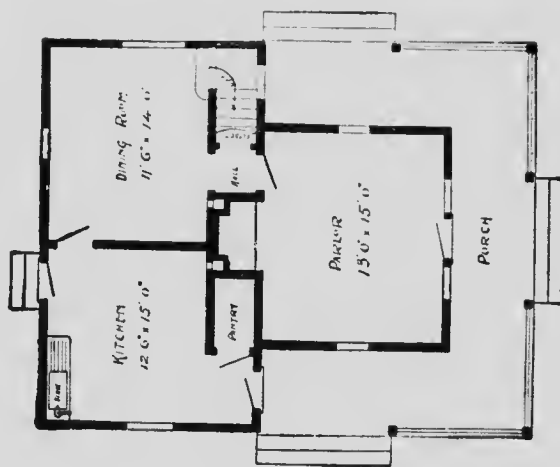

FIRST FLOOR PLAN

### SIZE

Width, 28 feet.  
Length, 29 feet 6 in.,  
exclusive of porch.

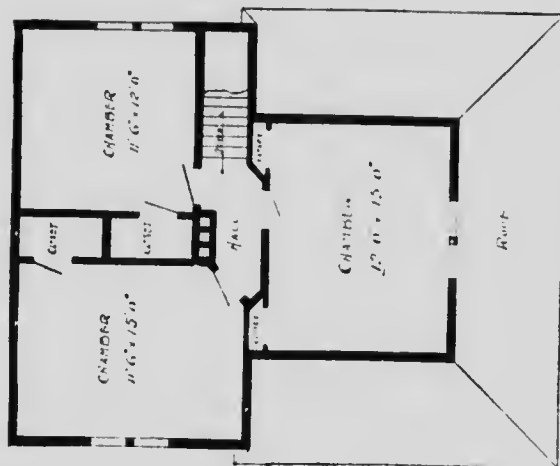

SECOND FLOOR PLAN

Blue prints consist of foundation plan; first and second floor plans; front, rear, two side elevations; wall sections and all necessary interior details.

Specifications consist of about fifteen pages of typewritten matter.

# Common-Sense Stairbuilding and Handrailing

Illustrated

By **FRED T. HODGSON**

**T**HIS new volume contains three distinct treatises on the subject, each of which is complete in itself. The system of forming the lines for obtaining the various curves, wreaths, ramps and face moulds for handrails are the simplest in use and those employed by the most successful handrailleurs. Mr. Hodgson has placed this unusually intricate subject before his readers in a very plain and easily understood manner, and any workman having a fair knowledge of "lines" and who can construct an ordinary straight stairway can readily grasp the whole system of "handrailing" after a small study of this work.

The building of stairs and properly making and placing over them a graceful handrail and suitable balusters and newel posts is one of the greatest achievements of the joiner's art and skill, yet it is an art that is the least understood of any of the constructive processes the carpenter or joiner is called upon to accomplish. In but very few of the plans made by an architect are the stairs properly laid down or divided off; indeed, most of the stairs as laid out and planned by the architect are impossible ones, owing to the fact that the circumstances that govern the formation of the rail are either not understood or not noticed by the designer, and the expert handrailer often finds it difficult to conform the stairs and rail to the plan. Generally, however, he gets so close to it that the character of the design is seldom changed.

The stairs are the great feature of a building as they are the first object that meets the visitor and claims his attention, and it is essential, therefore, that the stair and its adjuncts should have a neat and graceful appearance, and this can only be accomplished by having the rail properly made and set up.

This little book gives such instructions in the art of handrailing as will enable the young workman to build a rail so that it will assume a handsome appearance when set in place. There are eleven distinct styles of stairs shown, but the same principle that governs the making of the simplest rail, governs the construction of the most difficult, so, once having mastered the simple problems in this system, progress in the art will become easy, and a little study and practice will enable the workman to construct a rail for the most tortuous stairway.

The book is copiously illustrated with nearly one hundred working diagrams together with full descriptive text.

Price, \$1.00. Address all orders to

**THE RADFORD ARCHITECTURAL CO.**

Chicago Office: 190 W. 22d St. RIVERSIDE, ILL., U.S.A.

New York Office: 822-824 Broadway

# PRACTICAL USES OF THE STEEL SQUARE

**A** MODERN TREATISE by Fred T. Hodgson. An exhaustive work including a brief history of the Square; a description of many of the Squares that are now, and have been in the market, including some very ingenious devices for laying out Bevels for Rafters, Braces and other inclined work; also chapters on the Square as a calculating machine, showing how to measure Solids, Surfaces and Distances—very useful to builders and estimators. Chapters on roofing and how to form them by the aid of the Square; Octagon, Hexagon, Hip, and other Roofs are shown and explained, and the manner of getting the rafters and jacks given. Chapters on heavy timber framing, showing how the Square is used for laying out Mortises, Tenons, Shoulders, Inclined Work, Angle Corners and similar work.

The work abounds with hundreds of fine illustrations and explanatory diagrams, which will prove a perfect mine of instruction for the mechanic, young or old.

Two large volumes, bound in fine cloth, printed on a superior quality of paper from new large type.

**Price, 2 Volumes, Cloth Binding, \$2.00**

**Publishers' Note.** We wish to state this work is entirely new and must not be mistaken for Mr. Hodgson's former works on the "Steel Square," which were published some twenty years ago. Be sure and get "Practical Uses of the Steel Square," by Fred T. Hodgson. Address all orders to

**The Radford Architectural Co.**

**RIVERSIDE, ILL., U. S. A.**

**Chicago Office: 190 W. 22d Street  
New York Office: 822-824 Broadway**

# The Radford American Homes

100 House Plans

*Illustrated*

---

This is a new book of low and medium priced  
house plans.

It contains all of the latest styles  
of architecture.

This book is handsomely bound in English  
cloth, cover embossed in three colors,  
gilt top.

256 pages.

---

**Price: \$1.00, postage paid**

---

**The Radford Architectural Co.**

Chicago

Riverside, Ill., U. S. A.

New York

# The Radford Ideal Homes

100 House Plans

*Illustrated*

---

This is the book of house plans which has met with such wonderful success.

It contains 100 low and medium priced house designs.

Handsomely bound in English cloth, cover embossed in colors.

Size, 8 x 11 inches.

---

**Price: \$1.00, postage paid**

---

**The Radford Architectural Co.**

Chicago

Riverside, Ill., U. S. A.

New York

