
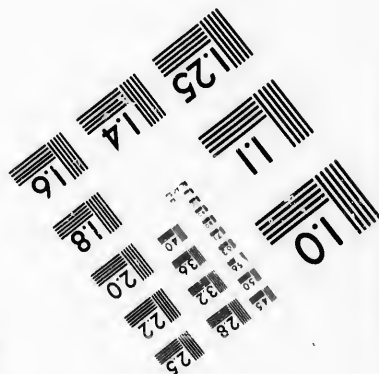



IMAGE EVALUATION TEST TARGET (MT-3)



Photographic
Sciences
Corporation

23 WEST MAIN STREET
WEBSTER, N.Y. 14580
(716) 872-4503

**CIHM/ICMH
Microfiche
Series.**

**CIHM/ICMH
Collection de
microfiches.**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

© 1986

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- ☐ Coloured covers/
Couverture de couleur
- ☐ Covers damaged/
Couverture endommagée
- ☐ Covers restored and/or laminated/
Couverture restaurée et/ou pelliculée
- ☐ Cover title missing/
Le titre de couverture manque
- ☐ Coloured maps/
Cartes géographiques en couleur
- ☐ Coloured ink (i.e. other than blue or black)/
Encre de couleur (i.e. autre que bleue ou noire)
- ☐ Coloured plates and/or illustrations/
Planches et/ou illustrations en couleur
- ☐ Bound with other material/
Relié avec d'autres documents
- ☐ Tight binding may cause shadows or distortion
along interior margin/
La reliure serrée peut causer de l'ombre ou de la
distorsion le long de la marge intérieure
- ☐ Blank leaves added during restoration may
appear within the text. Whenever possible, these
have been omitted from filming/
Il se peut que certaines pages blanches ajoutées
lors d'une restauration apparaissent dans le texte,
mais, lorsque cela était possible, ces pages n'ont
pas été filmées.

- ☐ Coloured pages/
Pages de couleur
- ☒ Pages damaged/
Pages endommagées
- ☐ Pages restored and/or laminated/
Pages restaurées et/ou pelliculées
- ☒ Pages discoloured, stained or foxed/
Pages décolorées, tachetées ou piquées
- ☐ Pages detached/
Pages détachées
- ☒ Showthrough/
Transparence
- ☐ Quality of print varies/
Qualité inégale de l'impression
- ☐ Includes supplementary material/
Comprend du matériel supplémentaire
- ☐ Only edition available/
Seule édition disponible
- ☐ Pages wholly or partially obscured by errata
slips, tissues, etc., have been refilmed to
ensure the best possible image/
Les pages totalement ou partiellement
obscurcies par un feuillet d'errata, une pelure,
etc., ont été filmées à nouveau de façon à
obtenir la meilleure image possible.

☒ Additional comments: [Printed ephemera] [2] p.
Commentaires supplémentaires:

This item is filmed at the reduction ratio checked below/
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	12X	14X	16X	18X	20X	22X	24X	26X	28X	30X	32X
							✓				

The copy filmed here has been reproduced thanks to the generosity of:



Library of the Public
Archives of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol ➡ (meaning "CONTINUED"), or the symbol ▼ (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

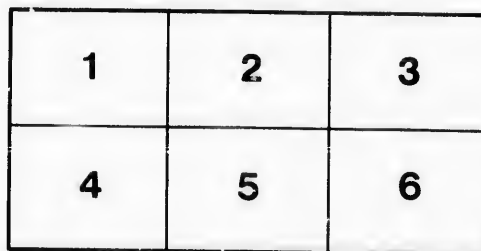

L'exemplaire filmé fut reproduit grâce à la générosité de:


La bibliothèque des Archives
publiques du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole ➡ signifie "A SUIVRE", le symbole ▼ signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

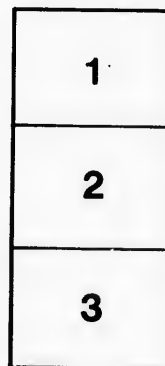

GOBIET'S COKE-OVEN.

Patented December 21st, 1875.

J. KOENIGSBERG,

Sole Agent for the United States and Canada.

MACHINERY HALL, A. 57.

P. O. BOX, 184 HUNTINGDON, PENNA.

Within a few years coke has become a leading fuel for blast furnaces. As this country is favored with an abundance of good quality of coal, great indifference has been shown in the making of coke; it is generally made in the open air, by simply firing a heap of coal, or in coke ovens constructed on very primitive plans. The value of coke oven is confined rigidly to the economy of labor in the process of coking, in saving of carbon, and in production of a dense and pure coke.

By his constructing a great number of coke ovens in Belgium, Prussia and Austria, the inventor has been in a position to study and appreciate the defects inherent to each system, and he has invented a coke oven wherein the imperfections recognized in the other systems are avoided, and to which he has given the improvements discovered by a long practice in this line of business. His invention has entirely succeeded, and his coke ovens are in general use in Europe. This year they were introduced in this country, and a small row was erected for the Kemble Coal and Iron Company, at Riddlesburg, Bedford County, Pa. The Broad Top coal used there is semi-bituminous, (very dry) and yielded in these ovens 80 per cent. of silver gray, dense, pure and sonorous coke, equal to the best coke in this country. In the same ovens, several charges of Clearfield County coal (bituminous) and Jefferson County coal (highly bituminous) have been coked, and gave a beautiful coke.

The following is a resumé of the advantages of these coke ovens:

1. Regular and complete combustion of the gases of carbonization.
2. Highly bituminous, as well as dry coal, can be coked with advantage and economy.
3. Each oven heats itself by its own gases; no reheating is necessary after started once, and is entirely independent of the adjoining ovens. The repairing of one or several ovens does not cause the others to be stopped.
4. Diminution of the duration of the coking process.
5. Produce 65 to 80 per cent. and more coke, according to the quality of coal.
6. Production of a fine silver gray, dense and sonorous coke.
7. Very great durability of coke ovens, proved by the existing ones.
8. The attendance is easy and cheap.
9. The time for charging and discharging is from 8 to 10 minutes only.

This invention consists in combining with a coke oven generally 24 feet long, 2 to 6 feet wide, and 4 to 7 feet high, a series of flues, these flues being made to communicate with the interior of the oven in such a manner that the heated gases which escape from the oven envelope in burning condition said oven from all sides, and thereby a uniform heat is produced and the formation of coke is materially facilitated.

The ovens are generally arranged in single groups from 10 to 25, connected to a common chimney. In front of them the discharging machine is placed. These ovens are entirely independent, one from the other, and have nothing in common except the main flue and the partition wall between each other, so that each oven can be worked separately, if desired.

Each oven is provided with two supply funnels (charging holes), which extend down through the top, and which are covered with cast-iron shutters, lined with fire-clay, so that they can be closed immediately after the oven has been charged. Previous to introducing the coal the ovens are heated to a white heat, and as the coals are passing to these heated ovens they evolve a quantity of gas which is immediately ignited by its entry in the upper side flue, and passes in a burning condition all around each oven, so as to envelope the same in a complete sheet of fire and heat it uniformly at all points. The gases which rise in one of the ovens escape through the lateral channels into the upper side flues, which extend along one side of the oven, and which communicate through channels at their outer ends with the lower flues. From these lower flues the burning gases pass through channels into the bottom flues, the channels being situated at the inner ends of the side flues, so that the burning gases must travel through the flues in a zig-zag course. The bottom flues are situated beneath the sole of the oven, and they extend from the centre towards the outside of the walls enclosing the ovens, where said flues connect by channels with the return bottom flues, which communicate at their inner ends by ascending channels with the lower side flues of the other side of the oven.

From the outer end of these lower side flues the burning gases ascend through channels into the upper side flues, which communicate at their inner ends through ascending channels with the main flue. By forcing the gases through all these above described flues it will be seen that the burning gases, in passing through these flues, will heat each oven uniformly from all sides and no additional fuel is required to keep up the necessary heat in the ovens.

From each junction of the ascending channels with the main flue extends a lateral flue towards the outside of the brick wall enclosing the ovens, where the same is closed by suitable covers. Through these lateral flues access can be had to the ascending channels, and the circulation of the burning gases can be regulated by suitable dampers, which can be operated through the lateral flues.

In order to keep up the heat of the ovens to the required degree, it is desirable to effect the operations of charging and discharging the ovens in the shortest possible time. The ovens are charged by means of carts, which run on iron tracks on the top of the ovens, said carts being of sufficient capacity to contain enough coal for charging one-half of each oven, and while each oven is provided with two supply funnels, a sufficient quantity of coal can be introduced into the same by opening both funnels simultaneously, and dumping a load of coal into each at the same time.

For the purpose of discharging the ovens a machine is used, which runs on a track at the side of the structure, and is provided with a plunger fitting the ovens. This machine discharges one oven in three minutes.

The ovens are provided with doors at both ends, said doors being made of cast-iron and lined with fire-clay. Each of them is provided with a small door, working on hinges, to enable the firemen to spread the coal in the oven after they have been dumped. In each of the partition walls, between the adjoining ovens, are two sets of air flues, which communicate with the side flues of the oven for the purpose of introducing the requisite quantity of oxygen to support combustion of gases. In said side flues are also openings for the purpose of observing the process of combustion, and to clean out the flues if necessary. These openings have to be kept closed. By these means the ovens, after they have been once heated up, can be kept going for an indefinite time without requiring any additional fuel to heat them, and, if one or more of the ovens should become defective, they can be thrown out of operation and repaired without disturbing the action of the remaining ovens.

The heat in these ovens is uniform. This has effect that the material of which the ovens are built never suffer by contraction or expansion, which makes this oven more durable than any one in use now. As above mentioned, the said coke ovens are already in use in Austria, Prussia, France, Belgium, England, and lately introduced in America.

Particulars may be had on results they give by applying to the KEMBLE COAL AND IRON COMPANY, Riddlesburg, Bedford County, Pa.

WM. LAUBER, Gen'l Superintendent.

REFERENCES.

EUROPE.

AUSTRIAN STATE RAILWAY COMPANY, (Reschitzka). Central Director M. Lecoq, Schwarzenbergplatz, Vienna.

BARON ROTHSCHILD WORKS, Witkowitz. Director M. A. Andree, imp. and royal Counsellor of mines, Witkowitz, near Mähr. Ostrau, Moravia.

ARCHDUKE ALBRECHT WORKS, Trzinietz. Inspector of Mines and Works: M. Uhlig, Teschen. Austrian Silesia.

INNERBERGER COMPANY, Oslawan, near Briinn. Director-General Mr. Aug. Schuchard, Niebchungengasse, 1 Vienna.

AMERICA.

Hon. ROB. P. PARROTT, President of the Kemble Coal and Iron Company, Cold Spring, Putnam County, N. Y.

B. ANDR. KNIGHT, Esq., President of the Huntington & Broad Top R. R. Co., 417 Walnut Street, Philadelphia, Pa.

R. B. WIGTON, Esq., 208 South Fourth Street, Philadelphia, Pa.

