
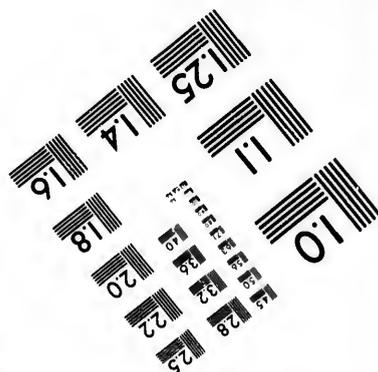
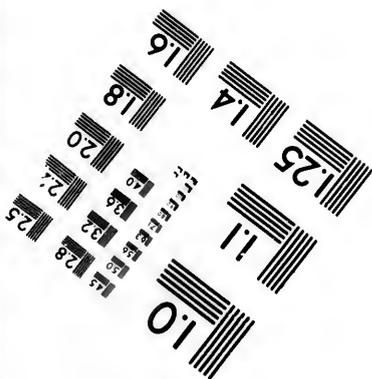



**IMAGE EVALUATION  
TEST TARGET (MT-3)**



**Photographic  
Sciences  
Corporation**

23 WEST MAIN STREET  
WEBSTER, N.Y. 14580  
(716) 872-4503

**CIHM/ICMH  
Microfiche  
Series.**

**CIHM/ICMH  
Collection de  
microfiches.**



Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques

**© 1982**

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- Coloured covers/  
Couverture de couleur
- Covers damaged/  
Couverture endommagée
- Covers restored and/or laminated/  
Couverture restaurée et/ou pelliculée
- Cover title missing/  
Le titre de couverture manque
- Coloured maps/  
Cartes géographiques en couleur
- Coloured ink (i.e. other than blue or black)/  
Encre de couleur (i.e. autre que bleue ou noire)
- Coloured plates and/or illustrations/  
Planches et/ou illustrations en couleur
- Bound with other material/  
Relié avec d'autres documents
- Tight binding may cause shadows or distortion  
along interior margin/  
La reliure serrée peut causer de l'ombre ou de la  
distortion le long de la marge intérieure
- Blank leaves added during restoration may  
appear within the text. Whenever possible, these  
have been omitted from filming/  
Il se peut que certaines pages blanches ajoutées  
lors d'une restauration apparaissent dans le texte,  
mais, lorsque cela était possible, ces pages n'ont  
pas été filmées.
- Additional comments:/  
Commentaires supplémentaires:

- Coloured pages/  
Pages de couleur
- Pages damaged/  
Pages endommagées
- Pages restored and/or laminated/  
Pages restaurées et/ou pelliculées
- Pages discoloured, stained or foxed/  
Pages décolorées, tachetées ou piquées
- Pages detached/  
Pages détachées
- Showthrough/  
Transparence
- Quality of print varies/  
Qualité inégale de l'impression
- Includes supplementary material/  
Comprend du matériel supplémentaire
- Only edition available/  
Seule édition disponible
- Pages wholly or partially obscured by errata  
slips, tissues, etc., have been refilmed to  
ensure the best possible image/  
Les pages totalement ou partiellement  
obscurcies par un feuillet d'errata, une pelure,  
etc., ont été filmées à nouveau de façon à  
obtenir la meilleure image possible.

This item is filmed at the reduction ratio checked below/  
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	14X	18X	22X	26X	30X
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12X	16X	20X	24X	28X	32X

The copy filmed here has been reproduced thanks to the generosity of:




Harold Campbell Vaughan Memorial Library  
Acadia University

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol  $\rightarrow$  (meaning "CONTINUED"), or the symbol  $\nabla$  (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

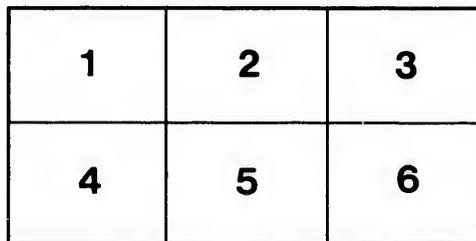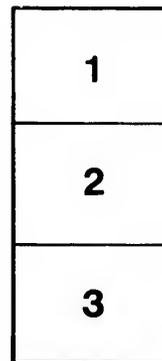

L'exemplaire filmé fut reproduit grâce à la générosité de:

Harold Campbell Vaughan Memorial Library  
Acadia University

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole  $\rightarrow$  signifie "A SUIVRE", le symbole  $\nabla$  signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

600  
75



---

Some Analyses of Nova Scotia Coals and other Minerals.

---

BY E. GILPIN, JR., LL. D., F. R. S. C.,

Inspector of Mines, - Halifax, N. S.

---

*From the Transactions of the Nova Scotian Institute of Science,  
Vol. IX, Session 1896-97.*

---

THE  
LIBRARY  
OF THE  
CONGRESS

A  
TN 806  
.N6 G55

Hist

6<sup>00</sup>  
75

HIST

278813

II.—SOME ANALYSES OF NOVA SCOTIA COALS AND OTHER MINERALS.—BY E. GILPIN, JR., LL. D., F. R. S. C., *Inspector of Mines, Halifax, N. S.*

(Communicated March 8th, 1897.)

I purpose this evening to give you a few analyses of Nova Scotia minerals which are of interest.

A set of analyses of Coals from the three seams worked at Springhill by the Cumberland Railway and Coal Company were given me some months ago. They are as follows, and taken from the workings at a depth of from 800 to 1000 feet :

East or No. 1 Slope—Black or Main Seam :

Moisture.....	2.02
Volatile combustible matter .....	18.94
Fixed Carbon.....	75.29
Ash .....	3.75
	100.00

Sulphur .....	1.14
---------------	------

West or No. 2 Slope—South Seam. Sample No. 1, from upper division of seam :

Moisture .....	1.41
Volatile combustible matter .....	27.93
Fixed Carbon .....	67.47
Ash .....	3.19
	100.00

Sulphur .....	.58
---------------	-----

West or No. 2 Slope—South Seam, lower division of seam :

Moisture .....	1.51
Volatile combustible matter.....	28.44
Fixed Carbon.....	65.38
Ash .....	4.67
	100.00

Sulphur .....	.61
---------------	-----

North or No. 3 Slope—North Seam :

Moisture .....	2.71
Volatile combustible matter.....	28.41
Fixed Carbon .....	64.69
Ash .....	4.19
	100.00
Sulphur .....	.79

Analyst—J. T. DONALD, *Montreal*.

These analyses show the coals to be of excellent quality. The amounts of ash and sulphur are small, and that of the fixed carbon is large.

These analyses are interesting when compared with a set of analyses of the same seams made by me in the year 1881, and I believe not hitherto published, and with an analysis of the Black seam made by me in the year 1880, and published in the Transactions of the North of England Institute of Mining Engineers, in a paper on Canadian Coals, giving a full set of analyses of Nova Scotia coals, their ashes, etc.

The analyses made in the year 1881 are as follows:—

East Slope—Black or Main Seam :

Moisture .....	3.86
Volatile Combustible Matter, Fast Coking..	35.65
"                    "            Slow            "	26.46
Fixed Carbon .....	59.90
"                    "            Slow            "	65.23
Ash .....	4.45
Specific Gravity .....	1.29
Theoretical Evaporative Power.....	8.858 lbs.

West Slope—South Seam:—

Moisture .....	1.399
Volatile Combustible Matter, Fast Coking.	34.808
"                    "            Slow            "	31.225
Fixed Carbon .....	58.003
"                    "            Slow            "	61.586
Ash .....	5.790
Sulphur .....	.808
Theoretical Evaporative Power..	8.46 lbs.

## North Slope—North Seam :

Moisture .....	1.625
Volatile Combustible Matter, Fast Coking.	33.401
"                    "            Slow            "	28.672
Fixed Carbon .....	60.701
"                    "            Slow            "	65.431
Ash .....	4.272
Sulphur .....	.783
Theoretical Evaporative Power.....	8.99

The analysis of the Black seam made in the year 1878 has a complete sample column of coal representing the whole seam as then worked. A companion column was presented to the museum of the Geological Survey at Ottawa. The section of the seam was as follows :—

	Feet.	Inches.
Top coal, a little coarse.....	1	7
Coal, good .....	1	2½
Fire clay parting.....	—	0½
Coal, good .....	—	8
Coal, good .....	1	6
Fire clay parting.....	—	6
Coal, a little coarse.....	—	9
Coal, good .....	—	11
Fire clay parting.....	—	1
Coal, good .....	2	2
Coal, good, one inch soft .....	—	3
Coal, coarse.....	—	8½
<hr/>		
Total .....	10	4½

I need not repeat here the minute description given then of the various layers. It may be stated that the coal of the sample was bright, with occasional calc-spar and pyrites films, with somewhat irregular fracture. In the vicinity of the point in the mine where the sample was taken a large amount of coal was beautifully iridescent, recalling that splendid mineral Chrysocola. Samples of this when analysed with the means at my disposal did not give a reason for the coloring. It may have been due to some process of oxidation of iron pyrites.

Each band of coal was analysed with the following results :

BAND, NO.	1.	2.	3.	4.	5.	6.	7.	8.	9.	
Moisture .....	.98	.76	1.21	.30	.63	.90	1.34	.56	.41	
Volatile Comb. Matter.....	{ Slow Coking..	30.81	32.22	33.81	29.19	28.90	31.56	33.64	30.27	28.54
	{ Fast Coking..	31.75	36.12	37.25	32.65	33.84	35.17	35.91	33.88	30.17
Fixed Carbon ..	{ Slow Coking..	60.73	60.91	63.13	67.95	65.16	60.59	59.86	60.89	63.63
	{ Fast Coking..	57.82	57.01	59.60	61.48	60.22	59.98	57.56	57.28	61.70
Ash .....	7.45	6.11	1.85	2.56	5.31	3.95	5.16	8.28	7.42	
Sulphur .....	.85	.56	.79	1.21	1.85	.89	1.40	2.65	2.25	
Specific Gravity .....	1.31	1.30	1.28	1.27	1.29	1.28	1.29	1.33	1.32	
Theoretical Evap. Power .....	{ Slow Coking	8.33	8.40	8.65	9.28	8.92	8.32	8.20	8.35	8.90
	{ Fast Coking	7.95	7.65	8.20	8.83	8.30	8.20	7.88	7.75	8.54

Coke bright and tolerably compact.

Ash of average sample grey, with tinge of pink.

The average of the analyses calculating the respective thickness of the bands is about :—

Moisture .....	.78
Volatile Combustible Matter, Slow Coking.	31.32
“ “ “ Fast “	33.45
Fixed Carbon .....	Slow “ 62.54
“ “ “ Fast “	59.53
Ash .....	5.34
Sulphur .....	1.38

The ultimate analyses of the coal gave :—

Carbon .....	78.51
Hydrogen .....	5.19
Oxygen } .....	9.98
Nitrogen }	
Sulphur .....	1.12
Ash .....	5.20

100.00

As compared with the coal from other Provincial districts the Cumberland coals stand as follows :—

	Cape Breton.	Pictou.	Cumberland.
Moisture .....	.75	1.19	1.86
Volatile Combustible Matter ....	37.26	29.10	26.76
Fixed Carbon .....	58.74	60.63	66.65
Ash .....	3.25	9.34	4.70

From a comparison of the later with the older analyses it will be seen that those of coal from the deeper portions of the seams show lessened amounts of volatile combustible matter, increased percentages of fixed carbon, and diminished amounts of sulphur and ash. Speaking in general terms the coal would appear to have developed more into a steam fuel, the evaporative power being in a general way proportionate to the percentage of fixed carbon.

This would give the coals as at present mined a high calorific power. From analyses by Mason and Matheson in a paper read before the Nova Scotia Mining Society, it would appear that the calorific powers of coals from the Sydney coal fields vary from 7238 to 7623; of Pictou coal (sample from Intercolonial mine) 6963; and of Springhill coal 7898.

As compared with United States coal they should stand nearly in the rank of the best free burning coals of Pennsylvania, Virginia, and Maryland. Those coals hold from 12 to 21 per cent of volatile matter, and from 69 to 76 per cent of fixed carbon. The average contents of the United States coals are from 29 to 35 per cent of volatile matter and from 53 to 67 per cent of fixed carbon. These coals therefore from Springhill should rank for steam purposes next to the class which may be described as the best selected for use on the large ocean passenger vessels.

I have not at hand any proximate analyses of English coals to compare with these under consideration. However, taking the results obtained in the English Admiralty trials of steam coals, and comparing the percentage of fixed carbon found in the trials with the fixed carbon given in these analyses, it will be found that the English and Scotch coals run from 49 to 88 per cent as compared with 68.2 per cent in the Springhill coals.

This would give the Springhill coal about the same relative position to the best Welsh coals as has already been assigned to it in comparison with the best American coals. The evaporative power of the Springhill coals would, from the analyses, stand higher than that of the English and Scotch coals, and rank next

to that of the best Welsh steam coals. It may be remarked that the best American and Welsh coals would be classified as free burning, semi-anthracite, while the Springhill coals are bituminous and coking.

I also give here an analysis of the Patrick seam as worked on the Patrick Lease, now the property of the Canada Coals and Railway Company, on the west bank of the Mucan River. The sample is from the lower part of the seam :—

Moisture . . . . .	1.00
Volatile Combustible Matter . . . . .	55.61
Fixed Carbon . . . . .	35.60
Ash . . . . .	7.49
Sulphur . . . . .	.50

As reddish and pulverulent.

The following analyses of pit waters may be given here :—

Vale Colliery :—

*Water contained in 1000 parts.*

Sulphate of Lime . . . . .	514
“ Magnesia . . . . .	100
Silicious matter . . . . .	190
Chloride of Sodium . . . . .	1.452
Carbonate of Sodium . . . . .	7.509
Iron and Alumina . . . . .	Trace.
Organic matter . . . . .	Trace.
No free acid.	

Springhill, from feeder 1300 feet level, water clear, free from smell, slightly acid :—

Sulphuric Acid, free . . . . .	Trace.
Sulphate of Lime . . . . .	Large.
“ Magnesia . . . . .	Small.
Chloride of Sodium . . . . .	Considerable.
Carbonic Acid . . . . .	Small.
Carbonate of Lime . . . . .	Small.
Iron Oxides . . . . .	Small.

Water exerted slightly corrosive action on iron exposed to it for twenty-four hours.

A number of analyses of Nova Scotia mineral and pit waters are given in a paper by the writer, read before the Newcastle Mining Institute some years ago.

In the upper part of Georges River in Cape Breton County there is a large deposit of iron pyrites in rocks which are, I think, laid down as Laurentian by the Geological Survey. The deposit has as yet been examined only superficially, but so far appears somewhat low in sulphur. The following analysis of samples from the most promising exposure gives:—

Sulphur .....	25·00
Copper .....	1·10
Gold .....	Trace.
Silver .....	Trace.
Silica .....	52·00
Iron, etc.....	25·00

For a number of years the presence of iron ore at Whycogomah in Cape Breton has been well known. The ores which are magnetites and red hematites are so very favourably situated, being close to the waters of the Bras d'Or Lake, that a good deal of work was done on them a number of years ago. A number of beds were opened and traced. They varied up to nine feet in thickness, and occurred in the Limestone division of the Laurentian, as described by Mr. Fletcher in his numerous reports on the Geology of Cape Breton, issued by the survey.

The analyses of the ores were contradictory in character, some being high in phosphorus, while others were very pure and ran high in iron. Last fall fresh discoveries were made in this district some distance from the old openings, of beds of magnetite some upwards of 100 feet in width. Indications are not wanting that these ores extend over a large tract of country.

The following analyses well serve to show the quality of the ores:—

Silica .....	14·41
Alumina .....	7·33
Manganese Oxide .....	·61
Lime .....	3·00
Sulphur .....	·22
Metallie Iron .....	54·50
Phosphorus.....	Trace.
Magnesia .....	Trace.

Iron.	Phosphorus.	Sulphur.
55·70 .....	None. ....	·68
59·60 .....	·16 .....	·23
63·20 .....	·004 .....	·31
54·30 .....	·005 .....	·38
53·20 .....	·38 .....	·25
50·74 .....	·31 .....	·024
53·12 .....	·28 .....	·026
52·85 .....	·0058 .....	·138
—		
Silica .....		21·05
Ferric Oxide .....		53·54
Ferrous Oxide ..		21·24
Alumina .....		2·26
Manganese Oxide .....		·50
Lime .....		1·17
Magnesia .....		·36
Sulphur .....		·023
Phosphorus .....		Trace.
Metallic Iron .....		54·00
—		
Metallic Iron .....		54·36
Phosphorus .....		·38
—		
Silica .....		13·00
Metallic Iron .....		55·70
Sulphur .....		·68
Phosphorus .....		Trace.

These analyses show that there are ores in this vicinity valuable enough for shipment as regards quality, and the present owners consider that new explorations now being carried on will show that the ore is present in quantities sufficient to warrant working on a large scale.

In this connection reference may be made to this division of the Cape Breton Laurentian in which the deposits occur. It may be distinguished as the Limestone division, as it is distinguished mineralogically from the other, or felsite division, by the presence of numerous beds of limestone, in addition to the felsites, gneisses, granites, etc., common to both. These limestones furnish marble, as at West Bay and other localities, lime

of excellent quality, and dolomites, suitable, as at New Campbellton, for furnace linings. Iron ores occur in them at numerous points both hematite and magnetite. Graphite is also found. In all probability, phosphates, similar to those found in Quebec will be proved on search being made. Where these measures are cut by dykes, copper and lead ores carrying gold and silver occur, and may in some cases prove valuable. As yet so far as my information goes free gold has not been found in quartz in the limestone division. The gold of Middle River and Cheticamp appears to be associated with soft talcose and felsitic schists of the other division. This gold occurs at Middle River free in quartz, and in the river gravel, derived presumably both from the quartz and augmented by gold flakes from the schists. At the Cheticamp River, so far as can be judged from the work done, it would appear to have a similar source, and to be connected only with the felsite series. In the latter case part of the gold may be derived from mineralized zones adjoining the dykes cutting the various rocks. However, the explorations of the coming season will probably give us more exact information. It is interesting to note in connection with the occurrence of gold at Cheticamp that native silver occurs in the Mackenzie River a short distance north, and it is possible that explorations in that section may result in the discovery of important amounts of this metal and associated gold.

