


CANADA FOUNDRY COMPANY, LIMITED

Single and Duplex Steam Pumps. 29-9

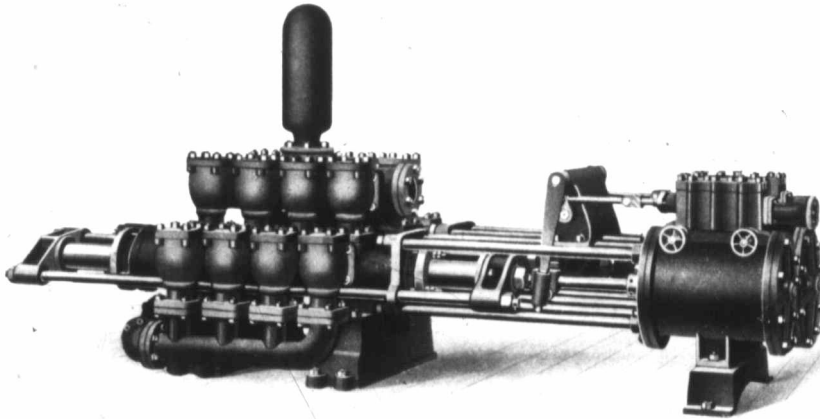

WITH POT VALVES.

DUPLEX OUTSIDE PACKED PLUNGER PUMP.

This is a larger type of the Duplex Pump described on the previous page, and comprises the same general principles, modified and strengthened as required for the greater capacity.

SIZES AND CAPACITIES:

Code Word.	Steam Cylinder.	Water Cylinder or Plungers.	Stroke.	Gals. per Stroke, each Plunger.	Capacity per Minute at Ordinary Speed.	Steam Pipe.	Exhaust Pipe.	Suction Pipe.	Delivery Pipe.
Patten.	14	7	18	3.00	67 strokes, 402 gals.	2	3	5	4
Patty.	14	8	12	2.61	100 strokes, 520 gals.	2	3	5	4
Paw.	14	8	18	3.02	67 strokes, 525 gals.	2	3	6	4
Pay.	16	7	18	3.00	67 strokes, 402 gals.	2	3	5	4
Payment.	16	7	24	4.00	50 strokes, 400 gals.	2	3	5	4
Paynim.	16	8	18	3.02	67 strokes, 525 gals.	2	3	6	4
Pea.	16	8	24	5.22	50 strokes, 522 gals.	2	3	8	6
Peak.	16	9	18	4.00	67 strokes, 604 gals.	2	3	8	6
Pear.	16	9	24	6.60	50 strokes, 660 gals.	2	3	8	6
Peck.	16	10	18	6.12	67 strokes, 820 gals.	2	3	8	6
Pedal.	16	10	24	8.16	50 strokes, 816 gals.	2½	3	10	8
Peer.	18	8	18	3.02	67 strokes, 525 gals.	2½	3½	6	4
Peg.	18	8	24	5.22	50 strokes, 522 gals.	2½	3½	8	6
Pelf.	18	9	18	4.00	67 strokes, 604 gals.	2½	3½	8	6
Pen.	18	9	24	6.60	50 strokes, 660 gals.	2½	3½	8	6
Pendent.	18	10	18	6.12	60 strokes, 734 gals.	2½	3½	8	6
Pendin.	18	10	24	8.16	45 strokes, 734 gals.	2½	3½	10	8

DRAWINGS AND SPECIFICATIONS FOR LARGER SIZES FURNISHED ON REQUEST.